



# **CAR-139 Part II**

## **Civil Aviation Regulation**

### **HELIPORTS - WATER AERODROME**

**Effective date: 27<sup>th</sup> of November 2025**

**Approved by: H.E. Eng. Naif Ali Hamed Al Abri**

**President of Civil Aviation Authority**

**Copyright © 2025 by the Civil Aviation Authority (CAA), Oman**

**All rights reserved. No part of this publication may be stored in a retrieval system, transmitted, or reproduced in any way, including but not limited to photo-copy, magnetic or other record, without the prior agreement and written permission of the President, for the CAA, Oman**

## FOREWORD

- a) In accordance with Royal Decree No (76/2019) and its amended version No (62/2023), to issue Civil Aviation Law, the Minister of Transport and Communications has been delegated the CAA to issue executive regulations pertaining to the Civil Aviation Law.
- b) The provisions of the Civil Aviation Law apply to:
- Civil aircraft in the territory of the Sultanate;
  - Civil Aircraft registered in the Sultanate, wherever that may be, in so much as there is no conflict with the provisions of the laws of the foreign state where the aircraft operates; and
  - Civil Aerodromes in the Sultanate and all works that may take place thereon.
- c) The Civil Aviation Authority, established by Royal Decree number 33/2012, dated 26th May 2012, is authorized by Civil Aviation Law, Article 1 to regulate aerodromes to the standards set out in the Civil Aviation Regulations, Rule 139, including carrying out the following tasks as they relate to Aerodromes:
- Construct, determine types of, operate and run civil Aerodromes, grant certificates to run, operate and invest in such Aerodromes;
  - Construct, operate and manage air navigation aids, meteorological and air traffic services in the Sultanate;
  - Supervise and regulate any party entrusted with running and operating civil Aerodromes in the Sultanate;
  - Coordination with the relevant parties' service providers to ensure the safe operation of Aerodromes in the Sultanate;
  - Issue, revoke and transfer the certificate of an Aerodrome and the certificate of an Operator, issue any other certificates or permits it deems necessary, after coordinating with the competent parties;
  - Issue instructions, publications and directives associated with civil Aerodromes which shall agree with national and international laws and regulations, and make certain of the ability and specialization of Aerodromes Operators in their management of Aerodromes, to guarantee the safe operation of the aircraft;
  - Supervise and regulate the work of Aerodromes Operators, in which case it may look directly into violations and take the necessary measures with regard to the administrative violations;
  - Levy charges on certificates it issues and on services provided for Aerodromes Operators;
  - Supervise all Aerodromes 'staff regardless of the identity of their employee, to ensure no breach of regulations or instructions, and the proper running of Aerodromes, for that it may investigate and take the necessary measures;
  - Approve technical staff to guarantee their efficiency to work at Aerodromes, after coordinating with the Ministry of Civil Service; and
  - Secure the safety of aviation and guard against exposing the citizens, their property and

public property to any danger as a result of any failure in regulating flight operations or air traffic control in the Territory of the Sultanate.

- d) The Civil Aviation Law defines the operation and use of Aerodromes in the Sultanate of Oman, in particular:

|              |                                    |
|--------------|------------------------------------|
| Chapter IV   | Air Easement Rights                |
| Chapter IV   | Aerodromes and Air Easement Rights |
| Article 6    | Expropriation of Real Property     |
| Chapter VIII | Civil Aviation Fees                |
| Chapter IX   | Search and Rescue                  |
| Chapter XIII | Sanctions and Penalties            |

- e) The provisions of the Chicago Convention and the Convention of Montreal of 1999, and the related international treaties and agreements, to which the Sultanate is a party, are considered complimentary to the Civil Aviation Law. In case of conflict, the provisions of the international treaties and agreements shall prevail. In the context of aerodromes, Article 28 of the Convention requires that each contracting state undertakes, so far as it may find practicable, to:

- Provide, in its territory, airports, etc in accordance with the standards and practices recommended or established from time to time, pursuant to this Convention;
- Adopt and put into operation the appropriate standard systems of communications procedure, codes, markings, signals, lighting and other operational practices and rules which may be recommended or established from time to time, pursuant to this Convention;
- Collaborate in international measures to secure the publication of aeronautical maps and charts in accordance with standards which may be recommended or established from time to time, pursuant to this Convention.

- f) The editing practices used in this document are as follows:

- 1) 'Shall' is used to indicate a mandatory requirement within the contents of a Regulation.
- 2) 'Should' is used to indicate a recommendation and normally is used in the contents of an AMC.
- 3) 'May' is used to indicate discretion by the CAA, or the industry as appropriate.
- 4) 'Will' indicates a mandatory requirement and is used to advise of action incumbent on the CAA.

## CORRIGENDUM OF AMENDMENTS

| Edition No.             | Date       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                 | Entered by                  |
|-------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| 1 <sup>st</sup> edition | 29/05/2018 | New CAR                                                                                                                                                                                                                                                                                                                                                                                                                                     | Aerodrome Safety Department |
| 2 <sup>nd</sup> edition | 2020       | <ul style="list-style-type: none"> <li>- Definitions of design D, D-value, dynamic load-bearing surface, elongated, helicopter stand, helicopter taxiway, helicopter taxi-route, heliport reference point, protection area, touchdown positioning circle, and touchdown positioning marking; physical characteristics; visual aids; and rescue and firefighting.</li> <li>- Incorporation of amendment 9 of ICAO Annex 14 vol 2.</li> </ul> | Aerodrome Safety Department |
| 3 <sup>rd</sup> edition | 27/11/2025 | <ul style="list-style-type: none"> <li>- Amendment 10 to annex 14 Volume II concerning certification and a safety management system (SMS) at heliports, obstacle limitation surfaces and visual aids (lighting) associated with heliports.</li> <li>- Certain technical and administrative aspects have been enhanced.</li> </ul>                                                                                                           | Aerodrome Safety Department |

## CONTENT

|                                                                                           |    |
|-------------------------------------------------------------------------------------------|----|
| FOREWORD .....                                                                            | 2  |
| CORRIGENDUM OF AMENDMENTS .....                                                           | 4  |
| ABBREVIATIONS AND SYMBOLS .....                                                           | 7  |
| CHAPTER 1 –GENERAL .....                                                                  | 9  |
| 1.1 Definitions .....                                                                     | 9  |
| 1.2 Applicability .....                                                                   | 12 |
| 1.3 Common reference systems .....                                                        | 13 |
| 1.4 Certification of heliports ( <i>Applicable as of 26 November 2026</i> ) .....         | 13 |
| CHAPTER 2 – HELIPORT DATA .....                                                           | 15 |
| 2.1 Aeronautical data .....                                                               | 15 |
| 2.2 Heliport reference point .....                                                        | 15 |
| 2.3 Heliport elevations .....                                                             | 15 |
| 2.4 Heliport dimensions and related information .....                                     | 15 |
| 2.5 Declared distances .....                                                              | 16 |
| 2.6 Coordination between aeronautical information services and heliport authorities ..... | 16 |
| 2.7 Rescue and firefighting .....                                                         | 17 |
| CHAPTER 3. PHYSICAL CHARACTERISTICS .....                                                 | 19 |
| 3.1 Onshore heliports .....                                                               | 19 |
| 3.2 Helidecks .....                                                                       | 34 |
| 3.3 Shipboard heliports .....                                                             | 36 |
| CHAPTER 4 – OBSTACLE ENVIRONMENT .....                                                    | 39 |
| 4.1 Obstacle limitation surfaces and sectors .....                                        | 39 |
| 4.2 Obstacle limitation requirements .....                                                | 43 |
| CHAPTER 5 – VISUAL AIDS .....                                                             | 54 |
| 5.1 Indicators .....                                                                      | 54 |
| 5.2 Markings and markers .....                                                            | 55 |
| 5.3 Lights .....                                                                          | 74 |
| CHAPTER 6. HELIPORT EMERGENCY RESPONSE .....                                              | 87 |
| 6.1 Heliport emergency planning .....                                                     | 87 |

|                                                                                                                                  |     |
|----------------------------------------------------------------------------------------------------------------------------------|-----|
| 6.2 Rescue and firefighting.....                                                                                                 | 88  |
| CHAPTER 7. WATER AERODROMES .....                                                                                                | 95  |
| APPENDIX 1. PROVISIONS FOR INSTRUMENT HELIPORTS WITH NON-PRECISION AND/OR<br>PRECISION APPROACHES AND INSTRUMENT DEPARTURES..... | 100 |
| 1. GENERAL.....                                                                                                                  | 100 |
| 2. HELIPORT DATA.....                                                                                                            | 100 |
| 3. PHYSICAL CHARACTERISTICS .....                                                                                                | 100 |
| 4. OBSTACLE ENVIRONMENT .....                                                                                                    | 101 |
| 5. VISUAL AIDS.....                                                                                                              | 108 |

## ABBREVIATIONS AND SYMBOLS

(Used in CAR-139 Part I1 – Heliports-Water Aerodrome)

### Abbreviations

|       |                                               |
|-------|-----------------------------------------------|
| AIP   | Aeronautical Information Publication          |
| APAPI | Abbreviated precision approach path indicator |
| ASPSL | Arrays of segmented point source lighting     |
| cd    | Candela                                       |
| cm    | Centimetre                                    |
| DIFFS | Deck integrated firefighting system           |
| FAS   | Fixed application system                      |
| FATO  | Final approach and take-off area              |
| FFAS  | Fixed foam application system                 |
| FMS   | Fixed monitor system                          |
| ft    | Foot                                          |
| GNSS  | Global navigation satellite system            |
| HAPI  | Helicopter approach path indicator            |
| HFM   | Helicopter flight manual                      |
| Hz    | Hertz                                         |
| IDF   | Initial departure fix                         |
| kg    | Kilogram                                      |
| km/h  | Kilometre per hour                            |
| kt    | Knot                                          |
| L     | Litre                                         |
| lb    | Pounds                                        |
| LDAH  | Landing distance available                    |
| L/min | Litre per minute                              |
| LOA   | Limited obstacle area                         |
| LOS   | Limited obstacle sector                       |
| LP    | Luminescent panel                             |
| m     | Metre                                         |
| MAPt  | Missed approach point                         |
| MTOM  | Maximum take-off mass                         |
| NVIS  | Night Vision Imaging Systems (NVIS)           |
| OCS   | Obstacle clearance surface                    |
| OFS   | Obstacle-free sector                          |
| OLS   | Obstacle limitation surface                   |
| PAPI  | Precision approach path indicator             |
| PFAS  | Portable foam application system              |
| PinS  | Point-in-space                                |
| PRP   | Point-in-space reference point                |
| RFF   | Rescue and Firefighting                       |
| RFFS  | Rescue and firefighting service               |
| RFM   | Rotorcraft flight manual (also known as HFM)  |

---

|        |                                        |
|--------|----------------------------------------|
| R/T    | Radiotelephony or radio communications |
| RTOD   | Rejected take-off distance             |
| RTODAH | Rejected take-off distance available   |
| s      | Second                                 |
| t      | Tonne (1 000 kg)                       |
| TLOF   | Touchdown and lift-off area            |
| TODAH  | Take-off distance available            |
| UCW    | Undercarriage width                    |
| VSS    | Visual segment surface                 |

### **Symbols**

|     |               |
|-----|---------------|
| °   | Degree        |
| =   | Equals        |
| %   | Percentage    |
| + - | Plus or minus |

## CHAPTER 1 –GENERAL

**Note 1:** CAR 139, Part II, contains provisions that prescribe the physical characteristics and obstacle limitation surfaces to be provided for at heliports, and certain facilities and technical services normally provided at a heliport. It is not intended that these specifications limit or regulate the operation of an aircraft.

**Note 2:** When designing a heliport, a design helicopter, which represents the largest dimensions; the greatest maximum take-off mass (MTOM); and the most critical obstacle avoidance criteria of the population of helicopters the heliport is intended to serve, is considered. For guidance on establishing a design helicopter see the Heliport Manual (Doc 9261).

It is to be noted that provisions for helicopter flight operations are contained in Annex 6, Part III.

**Note 3:** CAR139 Part II further prescribes the design criteria and operational specifications applicable to water aerodromes, addressing requirements that are specific to such facilities.

### 1.1 Definitions

CAR139 PART I, contains definitions for the terms which are used in both volumes. Those definitions are not reproduced in this volume, with the exception of the following two, which are included for ease of reference:

**Heliport.** An aerodrome or a defined area on a structure intended to be used wholly or in part for the arrival, departure and surface movement of helicopters.

**Obstacle.** All fixed (whether temporary or permanent) and mobile objects, or parts thereof, that:

- a) are located on an area intended for the surface movement of aircraft; or
- b) extend above a defined surface intended to protect aircraft in flight; or
- c) stand outside those defined surfaces and that have been assessed as being a hazard to air navigation.

The following list contains definitions of terms that are used only in Volume II, with the meanings given below.

**Ascent/Descent surface.** An inclined plane or complex surface that slopes upward from the centre of the FATO to indicate the path helicopters are expected to follow when vertical procedures are utilized – it can consist of:

- a) an inverted triangle when there is no lateral component; or
- b) an inverted conical surface when there is a lateral component.

**D.** The largest overall dimension of the helicopter when rotor(s) are turning measured from the most forward position of the main rotor tip path plane to the most rearward position of the tail rotor tip path plane or helicopter structure.

**Declared distances — heliports.**

- a) Take-off distance available (TODAH). The length of the FATO plus the length of helicopter clearway or elevated helicopter clearway (if provided) declared available and suitable for helicopters to complete the take-off.
- b) Rejected take-off distance available (RTODAH). The length of the FATO declared available and suitable for helicopters operated in performance class 1 to complete a rejected take-off.
- c) Landing distance available (LDAH). The length of the FATO plus any additional area declared available and suitable for helicopters to complete the landing manoeuvre from a defined height.

**Design D.** The D of the design helicopter.

**D-value.** A limiting dimension, in terms of “D”, for a heliport, helideck or shipboard heliport, or for a defined area within.

**Dynamic load-bearing surface.** A surface capable of supporting the loads generated by a helicopter in motion.

**Elevated heliport.** A heliport located on a raised structure on land.

**Elevated helicopter clearway.** A helicopter clearway that has been raised to a level that provides obstacle clearance.

**Elongated.** When used with TLOF or FATO, elongated means an area which has a length more than twice its width.

**Final approach and take-off area (FATO).** A defined area over which the final phase of the approach manoeuvre to hover or landing is completed and from which the take-off manoeuvre is commenced. Where the FATO is to be used by helicopters operated in performance class 1, the defined area includes the rejected take-off area available.

**Helicopter stand.** A defined area intended to accommodate a helicopter for purposes of: loading or unloading passengers, mail or cargo; fuelling, parking or maintenance; and, where air taxiing operations are contemplated, the TLOF.

**Helicopter clearway.** A defined area over which a helicopter may accelerate and achieve a specified set of helicopter flight conditions.

**Helicopter taxiway.** A defined path on a heliport intended for the ground movement of helicopters and that may be combined with an air taxi-route to permit both ground and air taxiing.

**Helicopter taxi-route.** A defined path established for the movement of helicopters from one part of a heliport to another:

- a) An air taxi-route. A marked taxi-route intended for air taxiing.
- b) A ground taxi-route. A taxi-route centred on a taxiway.

**Helideck.** A heliport located on a fixed or floating offshore facility such as an exploration and/or production unit used for the exploitation of oil or gas.

**Heliport elevation.** The elevation of the highest point of the FATO.

**Heliport reference point (HRP).** The designated location of a heliport.

**Initial departure fix (IDF).** The terminal fix for the visual segment and the fix where the instrument phase of the PinS departure begins.

**Point-in-space (PinS) approach.** an approach procedure designed for helicopters only that includes both a visual and an instrument segment.

**Point-in-space (PinS) departure.** A departure procedure designed for helicopters only that includes both a visual and an instrument segment.

**Point-in-space (PinS) reference point (PRP).** Reference point for the point-in-space approach as identified by the latitude and longitude of the MAPt.

**Point-in-space (PinS) visual segment.** The segment of a helicopter PinS procedure between a point (MAPt or IDF) and the heliport.

**Note:** *The design criteria for procedures are established in the Procedures for Air Navigation Services — Aircraft Operations, Volume II (PANS-OPS, Doc 8168 – Volume II).*

**Protection area.** A defined area surrounding a stand intended to reduce the risk of damage from helicopters accidentally diverging from the stand.

**Touchdown positioning circle (TDPC).** A touchdown positioning marking (TDPM) in the form of a circle used for omnidirectional positioning in a TLOF.

**Touchdown positioning marking (TDPM).** A marking or set of markings providing visual cues for the positioning of helicopters.

**Rejected take-off area.** A defined area on a heliport suitable for helicopters operating in performance class 1 to complete a rejected take-off.

**Runway-type FATO.** A FATO having characteristics similar in shape to a runway.

**Safety area.** A defined area on a heliport surrounding the FATO which is free of obstacles, other than those required for air navigation purposes, and intended to reduce the risk of damage to helicopters accidentally diverging from the FATO.

**Shipboard heliport.** A heliport located on a ship that may be purpose or non-purpose-built. A purpose-built shipboard heliport is one designed specifically for helicopter operations. A non-purpose-built shipboard heliport is one that utilizes an area of the ship that is capable of supporting a helicopter but not designed specifically for that task.

**Static load-bearing surface.** A surface capable of supporting the mass of a helicopter situated upon it.

**Surface-level heliport.** A heliport located on the ground or on a structure on the surface of the water.

**Touchdown and lift-off area (TLOF).** An area on which a helicopter may touch down or lift off.

**Vertical procedures.** Take-off and landing procedures that include an initial vertical or steep climb and a final vertical or steep descent profile. The profile may or may not include a lateral component.

**Winching area.** An area provided for the transfer by helicopter of personnel or stores to or from a ship.

## 1.2 Applicability

**Note:** *The dimensions discussed in this CAR139 are based on consideration of single-main-rotor helicopters. For tandem-rotor helicopters the heliport design will be based on a case-by-case review of the specific models using the basic requirement for a safety area and protection areas specified in this CAR139. The specifications of the main chapters of this Annex are applicable for visual heliports that may or may not incorporate the use of a Point-in-space approach or departure.*

*Additional specifications for instrument heliports with non-precision and/or precision approaches and instrument departures are detailed in Appendix 2. The specifications of this CAR139 are not applicable for water heliports (touchdown or lift-off on the surface of the water).*

**1.2.1** The interpretation of some of the specifications in CAR 139 expressly requires the exercising of discretion, the taking of a decision or the performance of a function by the appropriate authority. In other specifications, the expression appropriate authority does not actually appear although its inclusion is implied. In both cases, the responsibility for whatever determination or action is necessary shall rest with the State having jurisdiction over the heliport.

- 1.2.2** The specifications in CAR139 PART II, shall apply to all heliports intended to be used by helicopters in international civil aviation. They shall apply equally to areas for the exclusive use of helicopters at an aerodrome primarily meant for the use of aeroplanes. Where relevant, the provisions of CAR139 PART I, shall apply to the helicopter operations being conducted at such an aerodrome.
- 1.2.3** Unless otherwise specified, the specification for a colour referred to within this volume shall be that contained in Appendix 1 CAR139 PART I.

### **1.3 Common reference systems**

#### **1.3.1 Horizontal reference system**

World Geodetic System — 1984 (WGS-84) shall be used as the horizontal (geodetic) reference system. Reported aeronautical geographical coordinates (indicating latitude and longitude) shall be expressed in terms of the WGS-84 geodetic reference datum.

**Note:** *Comprehensive guidance material concerning WGS-84 is contained in the World Geodetic System — 1984 (WGS-84) Manual (Doc 9674).*

#### **1.3.2 Vertical reference system**

Mean sea level (MSL) datum, which gives the relationship of gravity-related height (elevation) to a surface known as the geoid, shall be used as the vertical reference system.

**Note 1:** *The geoid globally most closely approximates MSL. It is defined as the equipotential surface in the gravity field of the Earth which coincides with the undisturbed MSL extended continuously through the continents.*

**Note 2:** *Gravity-related heights (elevations) are also referred to as orthometric heights while distances of points above the ellipsoid are referred to as ellipsoidal heights.*

#### **1.3.3 Temporal reference system**

- 1.3.3.1** The Gregorian calendar and Coordinated Universal Time (UTC) shall be used as the temporal reference system.
- 1.3.3.2** When a different temporal reference system is used, this shall be indicated in GEN 2.1.2 of the Aeronautical Information Publication (AIP).

### **1.4 Certification of heliports (Applicable as of 26 November 2026)**

**Note:** *The intent of these specifications is to ensure the establishment of a regulatory regime so that compliance with the specifications in this CAR can be effectively enforced. It is recognized that the methods of ownership, operation and surveillance of heliports differ among States. The most effective and transparent means of ensuring compliance with applicable specifications is the availability of a separate safety oversight entity and a well-defined safety oversight mechanism with support of appropriate legislation to be able to carry out the function of safety regulation of heliports. When a heliport is granted a certificate, it signifies to aircraft operators and other organizations operating on the heliport that, at the time of certification, the heliport meets the specifications regarding the facility and its operation, and that it has, according to the certifying authority, the capability to maintain these specifications for the period of validity of the certificate. The certification process also establishes the baseline for*

*continued monitoring of compliance with the specifications. Information on the status of certification of heliports would need to be provided to the appropriate aeronautical information services for promulgation in the Aeronautical Information Publication (AIP). See 2.6.1 and the PANS-AIM (Doc 10066), Appendix 2, AD 1.5 (1).*

**1.4.1** Heliports used for international operations shall be certified in accordance with the specifications contained in this CAR as well as other relevant CAA specifications through an appropriate regulatory framework.

**1.4.2** For the safety, regularity and efficiency of operations, heliports that are open to public shall be certified in accordance with the specifications contained in this CAR as well as other relevant CAA specifications through an appropriate regulatory framework.

**Note:** *Guidance on heliport certification, including the interrelations between the aerodrome and heliport certification processes in case of co-location on an aerodrome, can be found in the Heliport Manual (Doc 9261).*

**1.4.3** The regulatory framework shall include the establishment of criteria and procedures for the certification of heliports.

**Note:** *Guidance on a regulatory framework is given in the Heliport Manual (Doc 9261).*

**1.4.4** As part of the certification process, CAA must be satisfied that a heliport manual which will include all pertinent information on the heliport site, facilities, services, equipment, operating procedures, organization and management including a safety management system (SMS), is submitted by the applicant for approval prior to granting the heliport certificate.

**Note 1:** *Guidance on the contents of a heliport manual, including procedures for its submission and approval, verification of compliance and granting of a heliport certificate, can be found in the Heliport Manual (Doc 9261).*

**Note 2:** *CAR-100 - Safety Management System contains SMS provisions applicable to certified heliports. Overarching guidance on SMS is contained in the Safety Management Manual (Doc 9859) with sector-specific guidance found in the Heliport Manual (Doc 9261).*

## CHAPTER 2 – HELIPORT DATA

### 2.1 Aeronautical data

**2.1.1** Determination and reporting of heliport-related aeronautical data shall be in accordance with the accuracy and integrity classification required to meet the needs of the end-user of aeronautical data.

**Note:** *Specifications concerning the accuracy and integrity classification related to heliport related aeronautical data are contained in PANS-AIM (Doc 10066), Appendix 1.*

**2.1.2** Digital data error detection techniques shall be used during the transmission and/or storage of aeronautical data and digital data sets.

**Note:** *Detailed specifications concerning digital data error detection techniques are contained in PANS-AIM (Doc 10066).*

### 2.2 Heliport reference point

**2.2.1** A heliport reference point shall be established for a heliport not collocated with an aerodrome.

**Note:** *When the heliport is collocated with an aerodrome, the established aerodrome reference point serves both aerodrome and heliport.*

**2.2.2** The heliport reference point shall be located near the initial or planned geometric centre of the heliport and shall normally remain where first established.

**2.2.3** The position of the heliport reference point shall be measured and reported to the aeronautical information services authority in degrees, minutes and seconds.

### 2.3 Heliport elevations

**2.3.1** The heliport elevation and geoid undulation at the heliport elevation position shall be measured and reported to the aeronautical information services authority to the accuracy of one-half metre or foot.

**2.3.2** The elevation of the TLOF and/or the elevation and geoid undulation of each threshold of the FATO (where appropriate) shall be measured and reported to the aeronautical information services authority to the accuracy of one-half metre or foot.

**Note:** *Geoid undulation must be measured in accordance with the appropriate system of coordinates.*

### 2.4 Heliport dimensions and related information

**2.4.1** The following data shall be measured or described, as appropriate, for each facility provided on a heliport:

- a) Heliport type — surface-level, elevated, shipboard or helideck;
- b) TLOF — dimensions to the nearest metre or foot, slope, surface type, bearing strength in tonnes (1 000 kg);

- c) FATO — type of FATO, true bearing to one-hundredth of a degree, designation number (where appropriate), length and width to the nearest metre or foot, slope, surface type;
- d) Safety area — length, width and surface type;
- e) Helicopter taxiway and helicopter taxi route — designation, width, surface type;
- f) Apron — surface type, helicopter stands;
- g) approach surface — when elevated, the height of the inner edge above the FATO;

**Note:** When the take-off climb surface is elevated, its inner edge and height will be the outer edge of the elevated helicopter clearway as specified in 4.1.14.

- h) Helicopter Clearway — length, ground profile, or, when elevated, height above the FATO, length and width; and
- i) Visual aids for approach procedures, marking and lighting of FATO, TLOF, helicopter ground taxiways, helicopter air taxiways and helicopter stands.

**2.4.2** The geographical coordinates of the geometric centre of the TLOF and/or of each threshold of the FATO (where appropriate) shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and hundredths of seconds.

**2.4.3** The geographical coordinates of appropriate centre line points of helicopter taxiways and helicopter taxi routes shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and hundredths of seconds.

**2.4.4** The geographical coordinates of each helicopter stand shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and hundredths of seconds.

**2.4.5** The geographical coordinates of obstacles in Area 2 (the part within the heliport boundary) and in Area 3 shall be measured and reported to the aeronautical information services authority in degrees, minutes, seconds and tenths of seconds. In addition, the top elevation, type, marking and lighting (if any) of obstacles shall be reported to the aeronautical information services authority.

**Note:** PANS-AIM (Doc 10066), Appendix 8 provides requirements for obstacle data determination in Areas 2 and 3.

## 2.5 Declared distances

The following distances to the nearest metre or foot shall be declared, where relevant, for a heliport:

- a) take-off distance available;
- b) rejected take-off distance available; and
- c) landing distance available.

## 2.6 Coordination between aeronautical information services and heliport authorities

**2.6.1** To ensure that aeronautical information services units obtain information to enable them to provide up-to-date pre-flight information and to meet the need for in-flight information, arrangements shall be made between aeronautical information services and heliport authorities responsible for heliport services to report to the responsible aeronautical information services unit with a minimum of delay:

- a) information on the status of certification of heliports and information on heliport conditions;
- b) the operational status of associated facilities, services and navigation aids within their area of responsibility;
- c) any other information considered to be of operational significance.

**2.6.2** Before introducing changes to the air navigation system, due account shall be taken by the services responsible for such changes of the time needed by the aeronautical information service for the preparation, production and issue of relevant material for promulgation. To ensure timely provision of the information to the aeronautical information service, close coordination between those services concerned is therefore required.

**2.6.3** Of a particular importance are changes to aeronautical information that affect charts and/or computer-based navigation systems which qualify to be notified by the Aeronautical Information Regulation and Control (AIRAC) system, as specified in Annex 15, Chapter 6 and Appendix 4. The predetermined, internationally agreed AIRAC effective dates in addition to 14 days postage time shall be observed by the responsible heliport services when submitting the raw information/data to aeronautical information services.

**Note:** Detailed specifications concerning the AIRAC system are contained in PANS-AIM (Doc 10066), Chapter 6.

**2.6.4** The heliport services responsible for the provision of raw aeronautical information/data to the aeronautical information services shall do that while considering accuracy and integrity requirements required to meet the needs of the end-user of aeronautical data.

**Note 1:** Specifications concerning the accuracy and integrity classification of heliport-related aeronautical data are contained in PANS-AIM (Doc 10066), Appendix 1.

**Note 2:** Specifications for the issue of NOTAM and SNOWTAM are contained in Annex 15, Chapter 6 and PANS-AIM (Doc 10066), Appendices 3 and 24, respectively

**Note 3:** The AIRAC information is distributed by the AIS at least 42 days in advance of the AIRAC effective dates with the objective of reaching recipients at least 28 days in advance of the effective date.

**Note 4:** The schedule of the predetermined internationally agreed AIRAC common effective dates at intervals of 28 days and guidance for the AIRAC use are contained in the Aeronautical Information Services Manual (Doc 8126, Chapter 2, 2.6).

## **2.7 Rescue and firefighting**

**Note:** See 6.2 for information on rescue and firefighting services.

**2.7.1** Information concerning the level of protection provided at a heliport for helicopter rescue and firefighting purposes shall be made available.

**2.7.2** The level of protection normally available at a heliport shall be expressed in terms of the category of the rescue and firefighting service as described in 6.2 and in accordance with the types and amounts of extinguishing agents normally available at the heliport.

- 2.7.3** Changes in the level of protection normally available at a heliport for rescue and firefighting shall be notified to the appropriate aeronautical information services units and, where applicable, air traffic units to enable them to provide the necessary information to arriving and departing helicopters. When such a change has been corrected, the above units shall be advised accordingly.

**Note:** *Changes in the level of protection from that normally available at the heliport could result from, but may not be limited to, a change in the availability of extinguishing agent or equipment used to deliver agents, or of personnel used to operate the equipment.*

- 2.7.4** A change shall be expressed in terms of the new category of the rescue and firefighting service available at the heliport.

## CHAPTER 3. PHYSICAL CHARACTERISTICS

### 3.1 Onshore heliports

**Note 1:** The provisions given in this section are based on the design assumption that no more than one helicopter will be in the FATO at the same time.

**Note 2:** The design provisions given in this section assume when conducting operations to a FATO in proximity to another FATO, these operations will not be simultaneous. If simultaneous helicopter operations are required, appropriate separation distances between FATOs need to be determined, giving due regard to such issues as rotor downwash and airspace, and ensuring the flight paths for each FATO, defined in Chapter 4, do not overlap. Further guidance on this issue is given in the Heliport Manual (Doc 9261).

**Note 3:** The provisions given in this section are common for surface-level heliports and elevated heliports unless otherwise specified.

**Note 4:** Guidance on the minimum size for elevated FATO/TLOFs in order to permit facilitation of essential operations around the helicopter is given in the Heliport Manual (Doc 9261).

**Note 5:** Guidance on structural design to account for the presence on elevated heliports of personnel, snow, freight, refuelling and firefighting equipment, etc. is given in the Heliport Manual (Doc 9261).

**Note 6:** Guidance on siting of a heliport and the location of the various defined areas, with due consideration of the effects of rotor downwash and other aspects of helicopter operations on third parties is given in the Heliport Manual (Doc 9261).

#### **Final approach and take-off areas (FATO)**

**Note:** Guidance on siting and orientation of the FATO at a heliport to minimize interference of arrival and departure tracks with areas approved for residential use and other noise-sensitive areas close to the heliport is given in the Heliport Manual (Doc 9261).

#### **3.1.1 A FATO shall:**

##### **a) provide:**

- 1) an area free of obstacles, except for essential objects which because of their function are located on it, and of sufficient size and shape to ensure containment of every part of the design helicopter in the final phase of approach and commencement of take-off - in accordance with the intended procedures;

**Note:** Essential objects are visual aids (e.g. lighting) or others (e.g. firefighting systems) necessary for safety purposes. For further requirements regarding penetration of a FATO by essential objects, see 3.1.4.

- 2) when solid, a surface which is resistant to the effects of rotor downwash; and

- i) when collocated with a TLOF, is contiguous and flush with the TLOF; has bearing strength capable of withstanding the intended loads; and ensures effective drainage;
  - or

- ii) when not collocated with a TLOF, is free of hazards shall a forced landing be required; and

**Note:** *Resistant implies that effects from the rotor downwash neither cause a degradation of the surface nor result in flying debris.*

- b) be associated with a safety area.

**3.1.2** A heliport shall be provided with at least one FATO, which need not be solid.

**Note:** *A FATO may be located on or near a runway strip or taxiway strip.*

**3.1.3** The minimum dimensions of a FATO shall be:

- a) where intended to be used by helicopters operated in performance class 1:

- 1) the length of the Rejected Take-Off Distance (RTOD) for the required Take-Off procedure prescribed in the helicopter flight manual (HFM) of the helicopters for which the FATO is intended, or 1.5 Design D, whichever is greater; and

- 2) the width for the required procedure prescribed in the HFM of the helicopters for which the FATO is intended, or 1.5 Design D, whichever is greater.

- b) where intended to be used by helicopters operated in performance classes 2 or 3, the lesser of:

- 1) an area within which can be drawn a circle of diameter of 1.5 Design D; or,

- 2) when there is a limitation on the direction of approach and touchdown, an area of sufficient width to meet the requirement of 3.1.1 a) 1) but not less than 1.5 times the overall width of the design helicopter.

**Note 1:** *The RTOD is intended to ensure containment of the helicopter during a rejected take-off. Although some flight manuals provide the RTOD, in others the dimension provided is the “minimum demonstrated ... size” (where “...” could be “heliport”, “runway”, “helideck” etc.) and this may not include helicopter containment. When this is the case, it is necessary to consider sufficient safety area dimensions as well as the dimensions of 1.5·D for the FATO, should the HFM not deliver data. For further guidance see Heliport Manual (Doc 9261).*

**Note 2:** *Local conditions, such as elevation, temperature, and permitted manoeuvring may need to be considered when determining the size of a FATO. Guidance is given in the Heliport Manual (Doc 9261).*

**3.1.4** Essential objects located in a FATO shall not penetrate a horizontal plane at the FATO elevation by more than 5 cm.

**3.1.5** When the FATO is solid the slope shall not:

- a) except as provided in b) or c) below; exceed 2 per cent in any direction;


- b) when the FATO is elongated and intended to be used by helicopters operated in performance class 1, exceed 3 per cent overall, or have a local slope exceeding 5 per cent; and

c) when the FATO is elongated and intended to be used solely by helicopters operated in performance class 2 or 3, exceed 3 per cent overall, or have a local slope exceeding 7 per cent.

**3.1.6** The FATO shall be located so as to minimize the influence of the surrounding environment, including turbulence, which could have an adverse impact on helicopter operations.

**Note:** *Guidance on determining the influence of turbulence is given in the Heliport Manual (Doc 9261). If turbulence mitigating design measures are warranted but not practical, operational limitations may need to be considered under certain wind conditions.*

**3.1.7** A FATO shall be surrounded by a safety area which need not be solid.

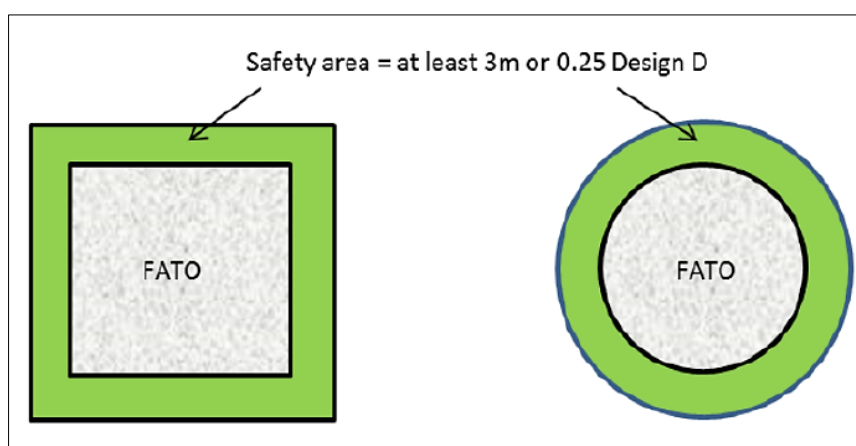

**Figure 3-1. FATO and associated safety area**

### **Safety areas**

**3.1.8** A safety area shall provide:

a) an area free of obstacles, except for essential objects which because of their function are located on it, to compensate for manoeuvring errors; and

b) when solid, a surface which: is contiguous and flush with the FATO; is resistant to the effects of rotor downwash; and ensures effective drainage.

**3.1.9** The safety area surrounding a FATO shall extend outwards from the periphery of the FATO for a distance of at least 3 m or 0.25 Design D, whichever is greater.


**3.1.10** No mobile object shall be permitted in a safety area during helicopter operations.

**3.1.11** Essential objects located in the safety area shall not penetrate a surface originating at the edge of the FATO at a height of 25 cm above the plane of the FATO sloping upwards and outwards at a gradient of 5 per cent.

**3.1.12** When solid, the slope of the safety area shall not exceed an upward slope of 4 per cent outwards from the edge of the FATO.

**Protected side slope**

- 3.1.13** A heliport shall be provided with at least one protected side slope, rising at 45 degrees outward from the edge of the safety area and extending to a distance of 10 m (see Figure 3.2).
- 3.1.14** A heliport shall be provided with at least two protected side slopes, rising at 45 degrees outward from the edge of the safety area and extending to a distance of 10 m.
- 3.1.15** The surface of a protected side slope shall not be penetrated by obstacles.

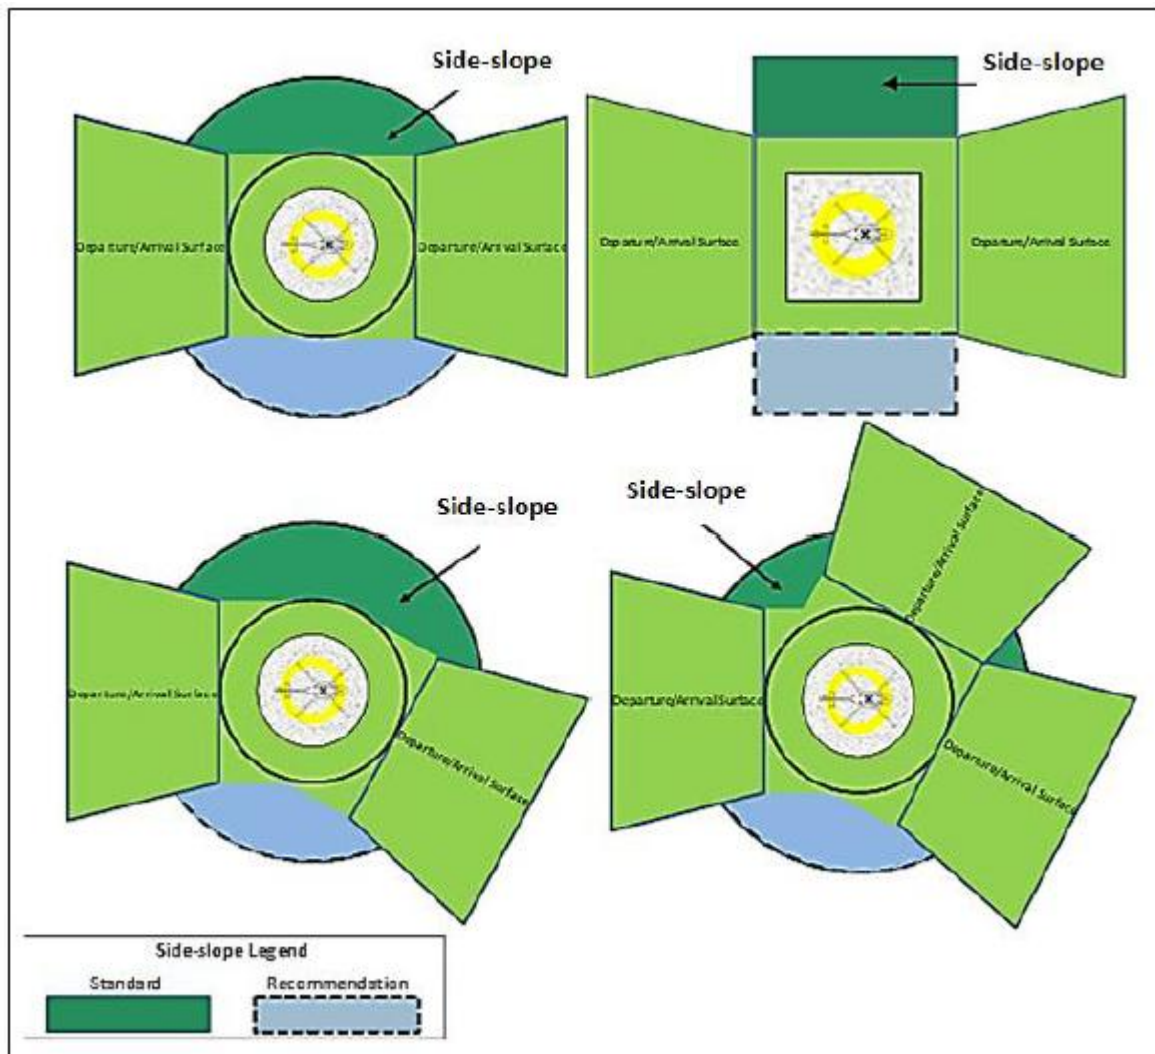

**Figure 3-2. FATO simple/complex safety area and side slope protection**

**Note:** These diagrams show a number of configurations of FATO/Safety Areas/Side slopes. For a more complex arrival/departure arrangement which consists of: two surfaces that are not diametrically opposed; more than two surfaces; or an extensive obstacle free sector (OFS) which abuts directly to the FATO, it can be seen that appropriate provisions are necessary to ensure that there are no obstacles between the FATO and/or safety area and the arrival/departure surfaces.

### **Helicopter clearways**

**Note:** *The inclusion of detailed specifications for helicopter clearways in this section is not intended to imply that a clearway has to be provided.*

**3.1.16** A helicopter clearway shall provide:

- a) an area free of obstacles, except for essential objects which because of their function are located on it, and of sufficient size and shape to ensure containment of the design helicopter when it is accelerating in level flight, and close to the surface, to achieve its safe climbing speed; and
- b) when solid, a surface which: is contiguous and flush with the FATO and safety area, is resistant to the effects of rotor downwash; and is free of hazards if a forced landing is required; or
- c) when elevated, clearance above all obstacles.

**3.1.17** When a helicopter clearway is provided, the inner edge shall be located:

- a) at the outer edge of the safety area; or
- b) when elevated, directly above, or directly below, the outer edge of the safety area.

**Note:** *Guidance on designing a clearway that is below the FATO of an elevated heliport/helideck is provided in Heliport Manual (Doc 9261).*

**3.1.18** The width of a helicopter clearway shall not be less than the width of the FATO and associated safety area. (See Figure 3-1.)

**3.1.19** When solid, the ground in a helicopter clearway shall not project above a plane having an upward slope of 3 per cent or having a local upward slope exceeding 5 per cent, the lower limit of this plane being a horizontal line which is located on the periphery of the FATO.

**3.1.20** An object situated in a helicopter clearway, which may endanger helicopters in the air, shall be regarded as an obstacle and shall be removed.

### **Touchdown and lift-off areas**

**3.1.21** A TLOF shall:

- a) provide:
  - 1) an area free of obstacles and of sufficient size and shape to ensure containment of the undercarriage of the most demanding helicopter the TLOF is intended to serve in accordance with the intended orientation;
  - 2) a surface which:
    - i) has sufficient bearing strength to accommodate the dynamic loads associated with the anticipated type of arrival of the helicopter at the designated TLOF;

- ii) is free of irregularities that would adversely affect the touchdown or lift-off of helicopters;
  - iii) has sufficient friction to avoid skidding of helicopters or slipping of persons;
  - iv) is resistant to the effects of rotor downwash; and
  - v) ensures effective drainage while having no adverse effect on the control or stability of a helicopter during touchdown and lift-off, or when stationary; and
- b) be associated with a FATO or a stand.

**3.1.22** A heliport shall be provided with at least one TLOF.

**3.1.23** A TLOF shall be provided whenever it is intended that the undercarriage of the helicopter will touch down within a FATO or stand, or lift off from a FATO or stand.

**3.1.24** The minimum dimensions of a TLOF shall be:

- a) when in a FATO intended to be used by helicopters operated in performance class 1, the dimensions for the required procedure prescribed in the helicopter flight manuals (HFM) of the helicopters for which the TLOF is intended; and
- b) when in a FATO intended to be used by helicopters operated in performance classes 2 or 3, or in a stand:
  - 1) when there is no limitation on the direction of touchdown, of sufficient size to contain a circle of diameter of at least 0.83 D of:
    - i) in a FATO, the design helicopter; or
    - ii) in a stand, the largest helicopter the stand is intended to serve;
  - 2) when there is a limitation on the direction of touchdown, of sufficient width to meet the requirement of 3.1.21 a) 1) above but not less than twice the undercarriage width (UCW) of:
    - i) in a FATO, the design helicopter; or,
    - ii) in a stand, the most demanding helicopter the stand is intended to serve.

**3.1.25** For an elevated heliport, the minimum dimensions of a TLOF, when in a FATO, shall be of sufficient size to contain a circle of diameter of at least 1 Design-D.

**3.1.26** Slopes on a TLOF shall not:

- a) except as provided in b) or c) below; exceed 2 per cent in any direction;
- b) when the TLOF is elongated and intended to be used by helicopters operated in performance class 1; exceed 3 per cent overall, or have a local slope exceeding 5 per cent; and
- c) when the TLOF is elongated and intended to be used solely by helicopters operated in performance class 2 or 3, exceed 3 per cent overall, or have a local slope exceeding 7 per cent.

**3.1.27** When a TLOF is within a FATO it shall be:

- a) centred on the FATO; or
- b) for an elongated FATO, centred on the longitudinal axis of the FATO.

**3.1.28** When a TLOF is within a helicopter stand, it shall be centred on the stand.

**3.1.29** A TLOF shall be provided with markings which clearly indicate the touchdown position and, by their form, any limitations on manoeuvring.

**Note:** *When a TLOF in a FATO is larger than the minimum dimensions, the TDPM may be offset while ensuring containment of the undercarriage within the TLOF and the helicopter within the FATO.*

**3.1.30** Where an elongated Performance Class 1 FATO/TLOF contains more than one TDPM, measures shall be in place to ensure that only one can be used at a time.

**3.1.31** Where alternative TDPMs are provided they shall be placed to ensure containment of the undercarriage within the TLOF and the helicopter within the FATO.

**Note:** *The efficacy of the rejected take-off or landing distance will be dependent upon the helicopter being correctly positioned for take-off, or landing.*

**3.1.32** Safety devices such as safety nets or safety shelves shall be located around the edge of an elevated heliport but shall not exceed the height of the TLOF.

### **Helicopter taxiways and taxi-routes**

**Note 1:** *The specifications for ground taxi-routes and air taxi-routes are intended for the safety of simultaneous operations during the manoeuvring of helicopters. The effect of wind velocity/turbulence induced by the rotor downwash would need to be considered.*

**Note 2:** *The defined areas addressed in this section are taxiways and ground/air taxi-routes:*

- a) *Taxiways associated with air taxi-routes may be used by both wheeled and skidded helicopters for either ground or air taxiing.*
- b) *Ground taxi-routes are meant for use by wheeled helicopters, for ground taxiing only.*
- c) *Air taxi-routes are meant for use by air taxiing only.*

### **Helicopter taxiways**

**Note 1:** *A helicopter taxiway is intended to permit the surface movement of a wheeled helicopter under its own power.*

**Note 2:** *A helicopter taxiway can be used by a wheeled helicopter for air taxi if associated with a helicopter air taxi-route.*

**Note 3:** *When a taxiway is intended for use by aeroplanes and helicopters, the provisions for aeroplane taxiways; taxiway strips; helicopter taxiways; and taxi-routes will be taken into consideration and the more stringent requirements will be applied.*

**3.1.33** A helicopter taxiway shall:

a) provide:

1) an area free of obstacles and of sufficient width to ensure containment of the undercarriage of the most demanding wheeled helicopter the taxiway is intended to serve;

2) a surface which:

i) has bearing strength to accommodate the taxiing loads of the helicopters the taxiway is intended to serve;

ii) is free of irregularities that would adversely affect the ground taxiing of helicopters;

iii) is resistant to the effects of rotor downwash; and

iv) ensures effective drainage while having no adverse effect on the control or stability of a wheeled helicopter when being manoeuvred under its own power, or when stationary; and


b) be associated with a taxi-route.

**3.1.34** The minimum width of a helicopter taxiway shall be the lesser of:

a) two times the undercarriage width (UCW) of the most demanding helicopter the taxiway is intended to serve; or

b) a width meeting the requirements of 3.1.33 a) 1).

**3.1.35** The transverse slope of a taxiway shall not exceed 2 per cent and the longitudinal slope shall not exceed 3 per cent.

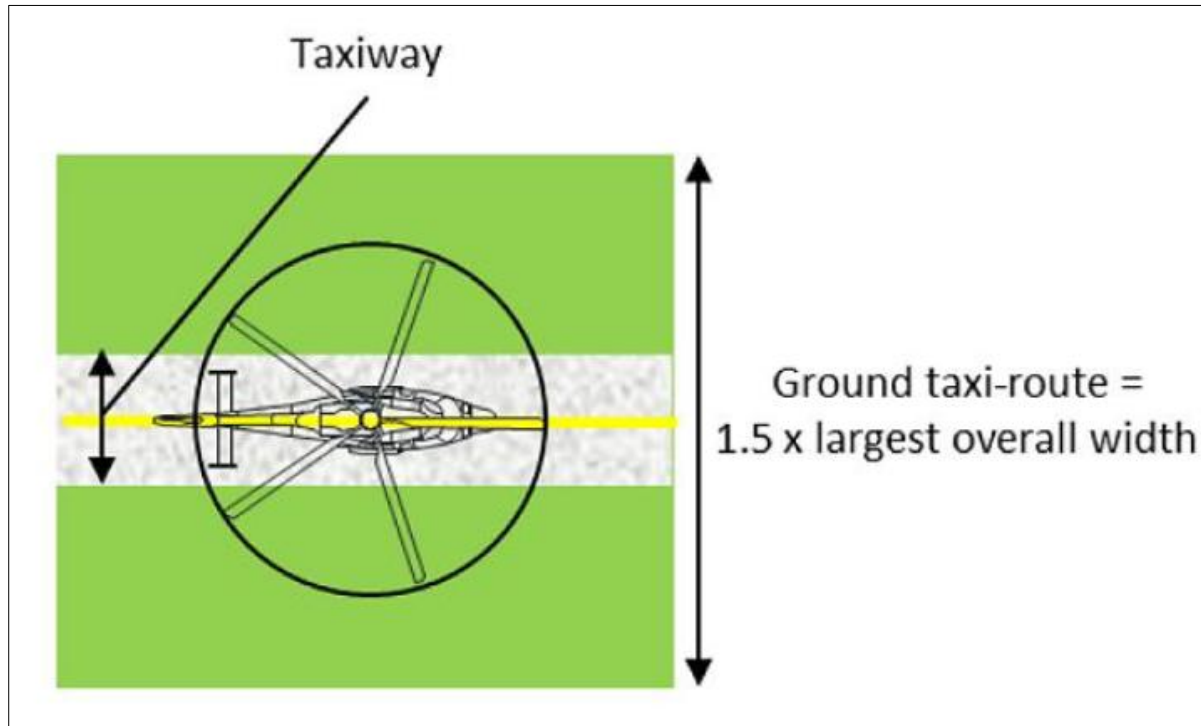

**Figure 3-3. Helicopter taxiway/ground taxi-route**

**3.1.36** A helicopter taxi-route shall provide:

- a) an area free of obstacles, except for essential objects which because of their function are located on it, established for the movement of helicopters; with sufficient width to ensure containment of the largest helicopter the taxi-route is intended to serve;
- b) when solid, a surface which is resistant to the effects of rotor downwash; and
  - 1) when collocated with a taxiway:
    - i) is contiguous and flush with the taxiway;
    - ii) does not present a hazard to operations; and
    - iii) ensures effective drainage; and
  - 2) when not collocated with a taxiway:
    - i) is free of hazards if a forced landing is required.

**3.1.37** No mobile object shall be permitted on a taxi-route during helicopter operations.

**Note:** See the *Heliport Manual (Doc 9261)* for further guidance.

**3.1.38** When solid and collocated with a taxiway, the taxi-route shall not exceed an upward transverse slope of 4 per cent outwards from the edge of the taxiway.**Helicopter ground taxi-routes****3.1.39** A helicopter ground taxi-route shall have a minimum width of 1.5 x the overall width of the largest helicopter it is intended to serve, and be centred on a taxiway.**3.1.40** Essential objects located in a helicopter ground taxi-route shall not:

- a) be located at a distance of less than 50 cm outwards from the edge of the helicopter ground taxiway; and
- b) penetrate a surface originating 50 cm outwards of the edge of the helicopter taxiway and a height of 25 cm above the surface of the taxiway and sloping upwards and outwards at a gradient of 5 per cent.

**Helicopter air taxi-routes**

**Note:** A helicopter taxi-route is intended to permit the movement of a helicopter above the surface at a height normally associated with ground effect and at ground speed less than 37km/h (20 kt).


**3.1.41** A helicopter air taxi-route shall have a minimum width of twice the overall width of the largest helicopter it is intended to serve. The surface of a helicopter air taxiway shall be static load-bearing.**3.1.42** If collocated with a taxiway for the purpose of permitting both ground and air taxi operations (see Figure 3.4):

- a) the helicopter air taxi-route shall be centred on the taxiway; and

b) essential objects located in the helicopter air taxi-route shall not:

- 1) be located at a distance of less than 50 cm outwards from the edge of the helicopter taxiway; and
- 2) penetrate a surface originating 50 cm outwards of the edge of the helicopter taxiway and a height of 25 cm above the surface of the taxiway and sloping upwards and outwards at a gradient of 5 per cent.

**3.1.43** When not collocated with a taxiway, the slopes of the surface of an air taxi-route shall not exceed the slope landing limitations of the helicopters the taxi-route is intended to serve. In any event, the transverse slope shall not exceed 10 per cent and the longitudinal slope shall not exceed 7 per cent.

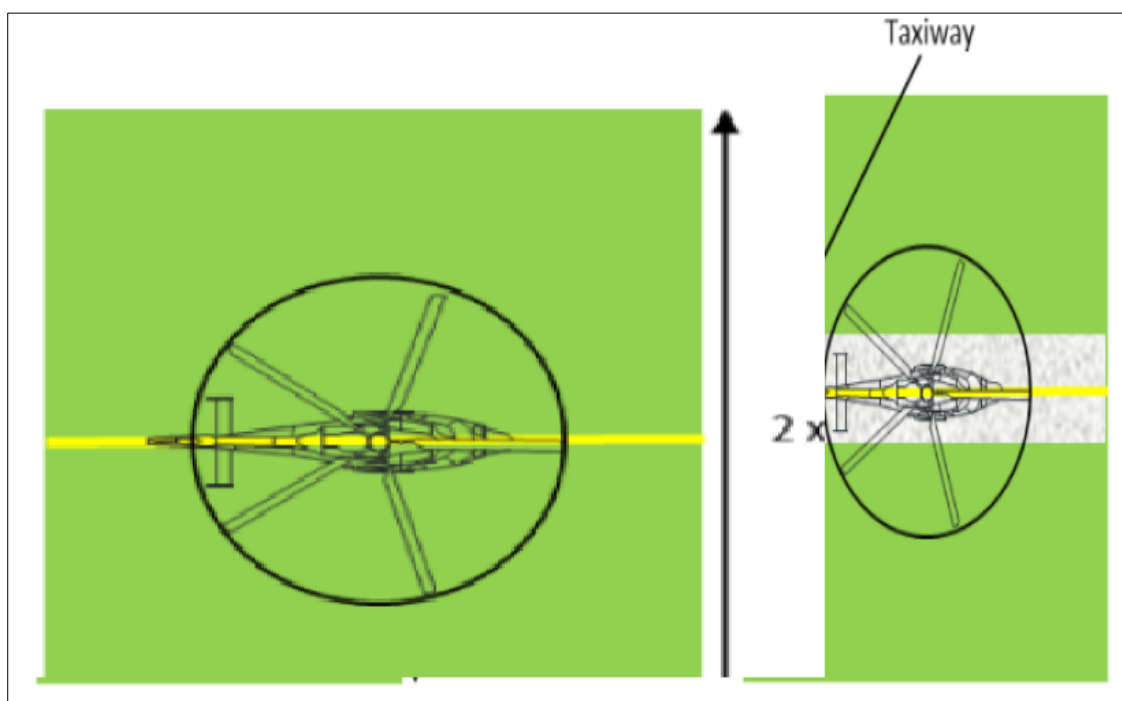

**Figure 3-3. Helicopter air taxi-route and combined air taxi-route/taxiway**

### **Helicopter stands**

**Note:** The provisions of this section do not specify the location for helicopter stands but allow a high degree of flexibility in the overall design of the heliport. However, it is not considered good practice to locate helicopter stands under a flight path. See the Heliport Manual (Doc 9261) for further guidance.

**3.1.44** A helicopter stand shall:

a) provide:

- 1) an area free of obstacles and of sufficient size and shape to ensure containment of every part of the largest helicopter the stand is intended to serve when it is being positioned within the stand;

2) a surface which:

- i) is resistant to the effects of rotor downwash;
- ii) is free of irregularities that would adversely affect the manoeuvring of helicopters;
- iii) has bearing strength capable of withstanding the intended loads;
- iv) has sufficient friction to avoid skidding of helicopters or slipping of persons; and
- v) ensures effective drainage while having no adverse effect on the control or stability of a wheeled helicopter when being manoeuvred under its own power, or when stationary; and

b) be associated with a protection area.

**3.1.45** The minimum dimensions of a helicopter stand shall be:

- a) a circle of diameter of 1.2 D of the largest helicopter the stand is intended to serve; or
- b) when there is a limitation on manoeuvring and positioning, of sufficient width to meet the requirement of 3.1.44 a) 1) above but not less 1.2 times overall width of largest helicopter the stand is intended to serve.

**Note 1:** *For a helicopter stand intended to be used for taxi-through only, a width less than 1.2D but which provides containment and still permits all required functions of a stand to be performed, might be used (in accordance with 3.1.44 a) 1)).*

**Note 2:** *For a helicopter stand intended to be used for turning on the ground, the minimum dimensions may be influenced by the turning circle data provided by the manufacturer and are likely to exceed 1.2 D. See the Heliport Manual (Doc 9261) for further guidance.*

**3.1.46** The mean the slope of a helicopter stand in any direction shall not exceed 2 per cent.

**Note:** *The requirements on the dimensions of helicopter stands assume the helicopter will turn in a hover when operating over a stand.*

**3.1.47** Each helicopter stand shall be provided with positioning markings to clearly indicate where the helicopter is to be positioned and, by their form, any limitations on manoeuvring.

**3.1.48** A stand shall be surrounded by a protection area which need not be solid.

### **Protection areas**

**3.1.49** A protection area shall provide:

- a) an area free of obstacles, except for essential objects which because of their function are located on it; and
- b) when solid, a surface which is contiguous and flush with the stand; is resistant to the effects of rotor downwash; and ensures effective drainage.

- 3.1.50** When associated with a stand designed for turning, the protection area shall extend outwards from the periphery of the stand for a distance of  $0.4D$ . (See Figure 3.5).
- 3.1.51** When associated with a stand designed for taxi-through, the minimum width of the stand and protection area shall not be less than the width of the associated taxi-route (see Figures 3.6 and 3.7).
- 3.1.52** When associated with a stand designed for non-simultaneous use (see Figures 3.8 and 3.9):
- a) the protection area of adjacent stands may overlap but shall not be less than the required protection area for the larger of the adjacent stands; and
  - b) the adjacent non-active stand may contain a static object but it shall be wholly within the boundary of the stand.

**Note:** To ensure that only one of the adjacent stands is active at a time, instruction to pilots in the AIP make clear that a limitation on the use of the stands is in force.

**3.1.53** No mobile object shall be permitted in a protection area during helicopter operations.

**3.1.54** Essential objects located in the protection area shall not:

- a) if located at a distance of less than  $0.75 D$  from the centre of the helicopter stand, penetrate a plane at a height of 5 cm above the plane of the central zone; and
- b) if located at a distance of  $0.75 D$  or more from the centre of the helicopter stand, penetrate a plane at a height of 25 cm above the plane of the central zone and sloping upwards and outwards at a gradient of 5 per cent.

**3.1.55** When solid, the slope of a protection area shall not exceed an upward slope of 4 per cent outwards from the edge of the stand.

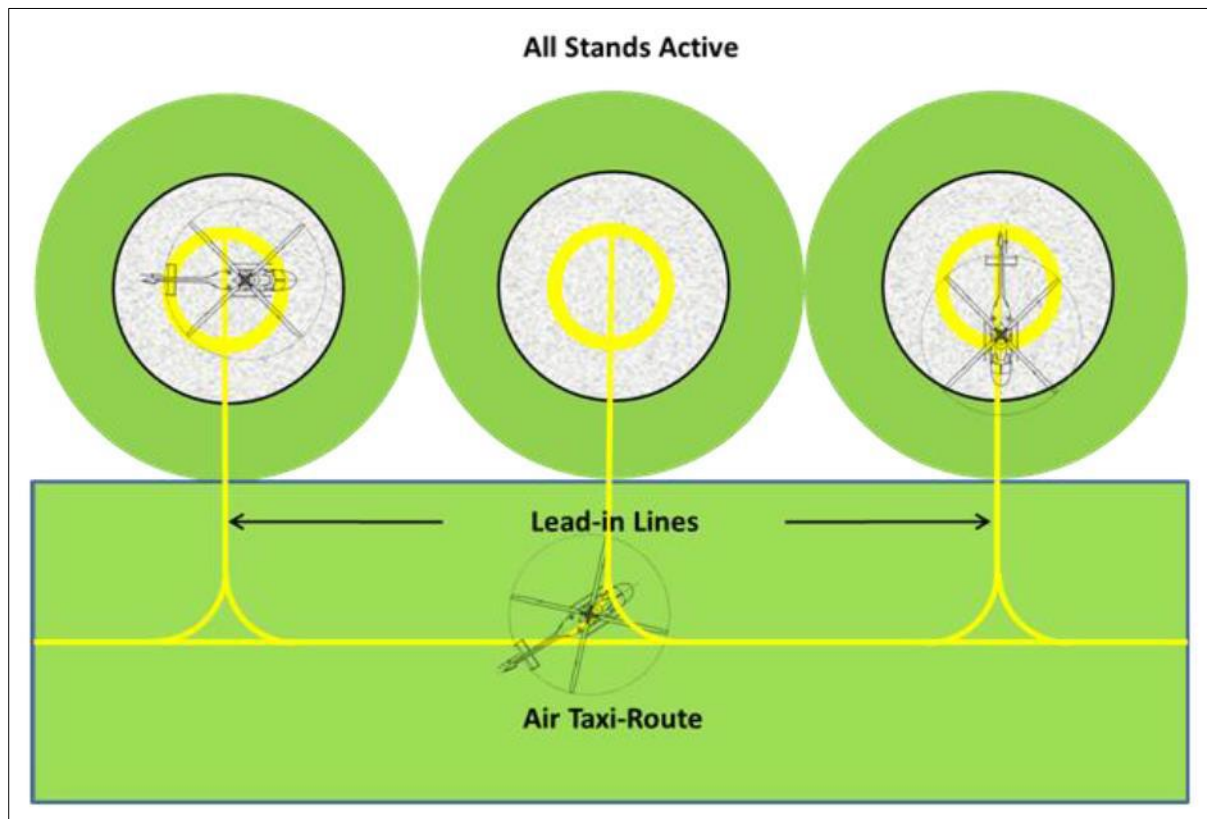


Figure 3-5. Turning stands (with air taxi-routes) simultaneous use

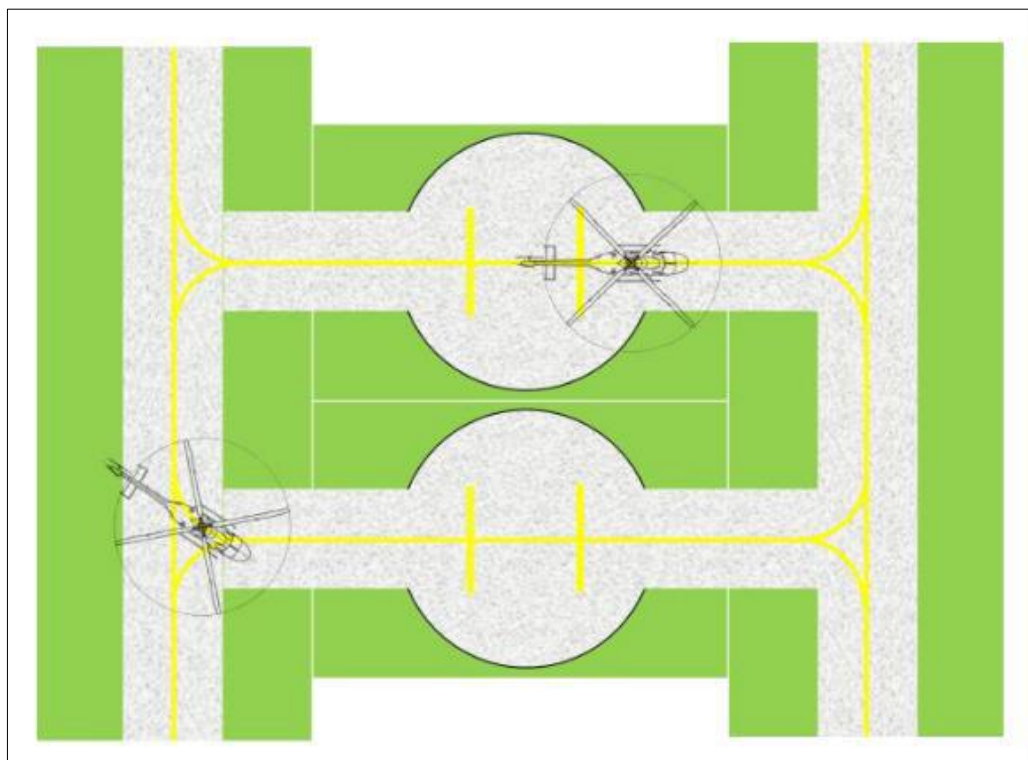


Figure 3-6. Ground taxi-through stands (with taxiway/ground taxi-route) simultaneous use

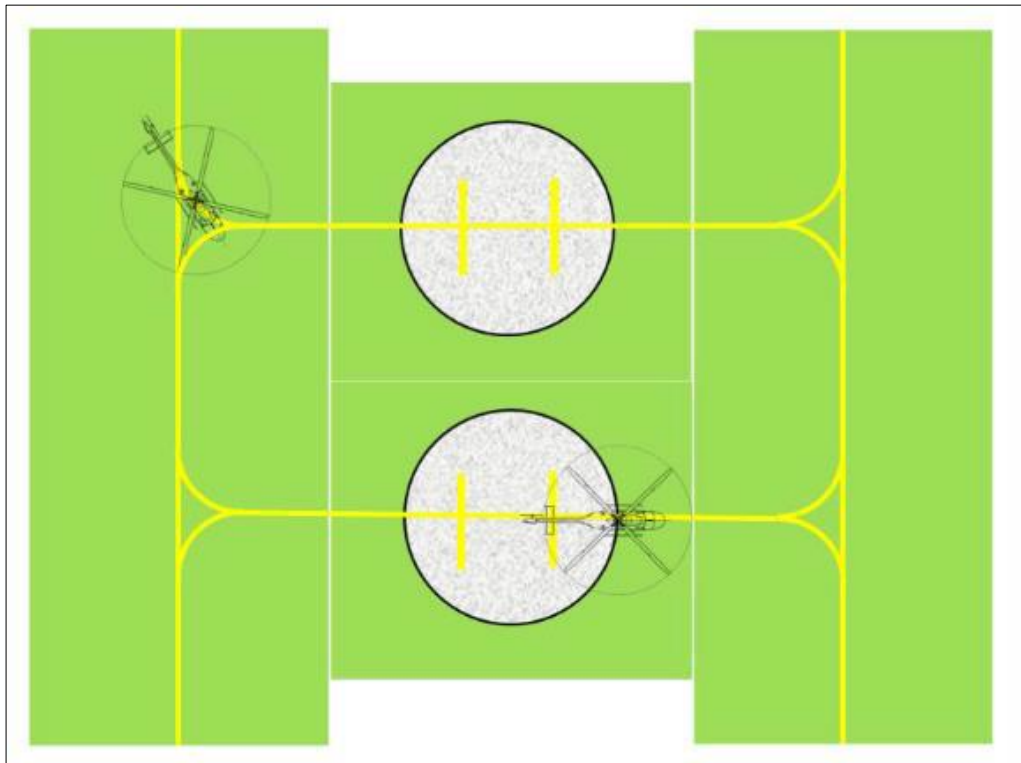


Figure 3-7. Air taxi-through stands (with air taxi-route) simultaneous use


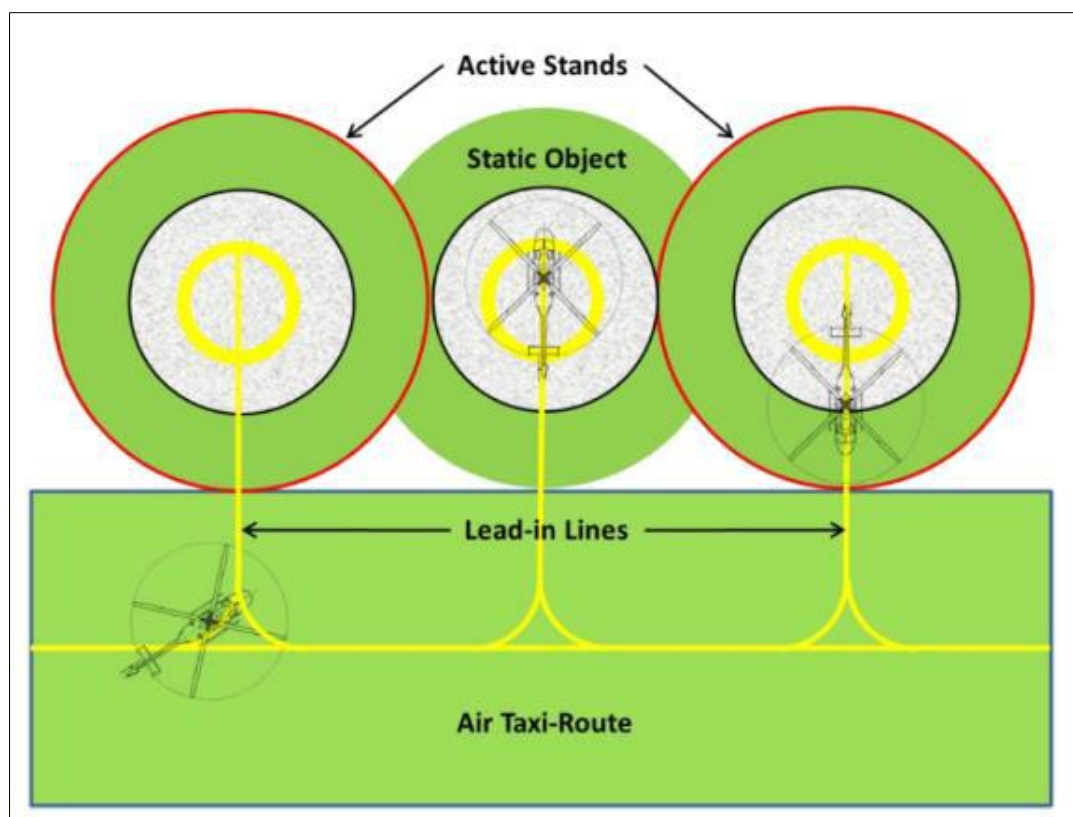


Figure 3-8. Turning stands designed for hover turns (with air taxi-routes) / non-simultaneous use – outer stands active

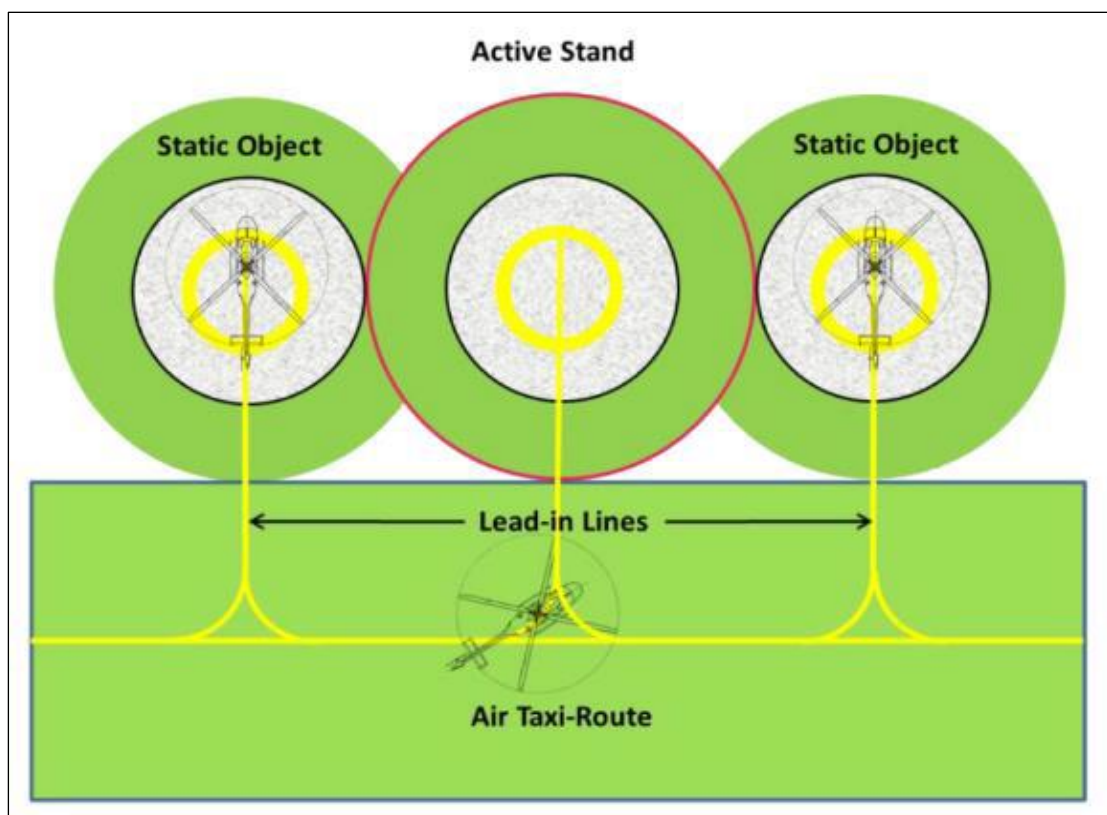

**Figure 3-9. Turning stands (with air taxi-route) non-simultaneous use – inner stand active**

***Location of a final approach and take-off area in relation to a runway or taxiway***

**3.1.56** Where a FATO is located near a runway or taxiway, and where simultaneous operations are planned, the separation distance between the edge of a runway or taxiway and the edge of a FATO shall not be less than the appropriate dimension in Table 3-1.

**3.1.57** A FATO shall not be located:

- a) near taxiway intersections or holding points where jet engine efflux is likely to cause high turbulence; or
- b) near areas where aeroplane vortex wake generation is likely to exist.

**Table 3-1. FATO minimum separation distance for simultaneous operations**

| If aeroplane mass and/or helicopter mass are | Distance between FATO edge and runway edge or taxiway edge |
|----------------------------------------------|------------------------------------------------------------|
| up to but not including 3 175 kg             | 60 m                                                       |
| 3 175 kg up to but not including 5 760 kg    | 120 m                                                      |
| 5 760 kg up to but not including 100 000 kg  | 180 m                                                      |
| 100 000 kg and over                          | 250 m                                                      |

### 3.2 Helidecks

**Note:** The following specifications are for helidecks located on structures engaged in such activities as mineral exploitation, research or construction. See 3.4 for shipboard heliport provisions.

#### *Final approach and take-off areas and touchdown and lift-off areas*

**Note 1:** For helidecks that have a 1 D or larger FATO it is presumed that the FATO and the TLOF will always occupy the same space and have the same load bearing characteristics so as to be coincidental. For helidecks that are less than 1 D, the reduction in size is only applied to the TLOF which is a load bearing area. In this case, the FATO remains at 1 D but the portion extending beyond the TLOF perimeter need not be load bearing for helicopters. The TLOF and the FATO may be assumed to be collocated.

**Note 2:** Guidance on the effects of airflow direction and turbulence, prevailing wind velocity and high temperatures from gas turbine exhausts or flare-radiated heat on the location of the FATO is given in the Heliport Manual (Doc 9261).

**Note 3:** Guidance on the design and markings for helideck parking areas is given in the Heliport Manual (Doc 9261).

**3.2.1** The specifications in paragraphs 3.2.14 and 3.2.15 shall be applicable for helidecks.

**3.2.2** A helideck shall be provided with one FATO and one coincident or collocated TLOF.

**3.2.3** A FATO may be any shape but shall be of sufficient size to contain an area within which can be accommodated a circle of diameter of not less than 1 D of the largest helicopter the helideck is intended to serve.

**3.2.4** A TLOF may be any shape but, subject to an appropriate risk assessment, shall be of sufficient size to contain:

- a) An area within which can be accommodated a circle of diameter not less than 0.83 D of the largest helicopter the helideck is intended to serve.

**Note:** Further guidance on factors to inform the risk assessment are given in the Heliport Manual (Doc 9261).

**3.2.5** The TLOF shall be of sufficient size to contain an area within which can be accommodated a circle of diameter of not less than 1 D of the largest helicopter the helideck is intended to serve.

**3.2.6** A helideck shall be arranged to ensure that a sufficient and unobstructed air-gap is provided which encompasses the full dimensions of the FATO.

**Note:** *Specific guidance on the characteristics of an air-gap is given in the Heliport Manual (Doc 9261). As a general rule, except for shallow superstructures of three stories or less, a sufficient air-gap will be at least 3 m.*

**3.2.7** The FATO shall be located so as to avoid, as far as is practicable, the influence of environmental effects, including turbulence, over the FATO, which could have an adverse impact on helicopter operations.

**3.2.8** The TLOF shall be dynamic load-bearing.

**3.2.9** The TLOF shall provide ground effect.

**3.2.10** No fixed object shall be permitted around the edge of the TLOF except for objects, which, because of their function, must be located thereon.

**3.2.11** For any TLOF 1 D or greater and any TLOF designed for use by helicopters having a D-value of greater than 16.0 m, objects installed in the obstacle-free sector whose function requires them to be located on the edge of the TLOF shall not exceed a height of 25 cm.

**3.2.12** For any TLOF 1 D or greater and any TLOF designed for use by helicopters having a D-value of greater than 16.0 m, objects installed in the obstacle-free sector whose function requires them to be located on the edge of the TLOF shall be as low as possible and in any case not exceed a height of 15 cm.

**3.2.13** For any TLOF designed for use by helicopters having a D-value of 16.0 m or less, and any TLOF having dimensions of less than 1 D, objects installed in the obstacle-free sector whose function requires them to be located on the edge of the TLOF, shall not exceed a height of 5 cm.

**Note:** *Lighting that is mounted at a height of less than 25 cm is typically assessed for adequacy of visual cues before and after installation.*

**3.2.14** Objects whose function requires them to be located within the TLOF (such as lighting or nets) shall not exceed a height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.

**Note:** *Examples of potential hazards include nets or raised fittings on the deck that might induce dynamic rollover for helicopters equipped with skids.*

**3.2.15** Safety devices such as safety nets or safety shelves shall be located around the edge of a helideck but shall not exceed the height of the TLOF.

**3.2.16** The surface of the TLOF shall be skid-resistant to both helicopters and persons and be sloped to prevent pooling of water.

**Note:** *Guidance on rendering the surface of the TLOF skid-resistant is contained in the Heliport Manual (Doc 9261).*

### 3.3 Shipboard heliports

- 3.3.1** The specifications in paragraphs 3.4.16 and 3.4.17 shall be applicable to shipboard heliports.
- 3.3.2** When helicopter operating areas are provided in the bow or stern of a ship or are purpose-built above the ship's structure, they shall be regarded as purpose-built shipboard heliports.

#### *Final approach and take-off areas and touchdown and lift-off areas*

**Note:** Except for the arrangement described in 3.4.8 b), for shipboard heliports it is presumed that the FATO and the TLOF will be coincidental. Guidance on the effects of airflow direction and turbulence, prevailing wind velocity and high temperature from gas turbine exhausts or flare-radiated heat on the location of the FATO is given in the Heliport Manual (Doc 9261).

- 3.3.3** A shipboard heliport shall be provided with one FATO and one coincidental or collocated TLOF.
- 3.3.4** A FATO may be any shape but shall be of sufficient size to contain an area within which can be accommodated a circle of diameter of not less than 1 D of the largest helicopter the heliport is intended to serve.
- 3.3.5** The TLOF of a shipboard heliport shall be dynamic load-bearing.
- 3.3.6** The TLOF of a shipboard heliport shall provide ground effect.
- 3.3.7** For purpose-built shipboard heliports provided in a location other than the bow or stern, the TLOF shall be of sufficient size to contain a circle with a diameter not less than 1 D of the largest helicopter the heliport is intended to serve.
- 3.3.8** For purpose-built shipboard heliports provided in the bow or stern of a ship, the TLOF shall be of sufficient size to:
- a) contain a circle with a diameter not less than 1 D of the largest helicopter the heliport is intended to serve; or
  - b) for operations with limited touchdown directions, contain an area within which can be accommodated two opposing arcs of a circle with a diameter of not less than 1 D in the helicopter's longitudinal direction. The minimum width of the heliport shall be not less than 0.83 D. (See Figure 3-10.)

**Note 1:** The ship will need to be manoeuvred to ensure that the relative wind is appropriate to the direction of the helicopter touchdown heading.


**Note 2:** The touchdown heading of the helicopter is limited to the angular distance subtended by the 1 D arc headings, minus the angular distance which corresponds to 15 degrees at each end of the arc.

- 3.3.9** For non-purpose-built shipboard heliports, the TLOF shall be of sufficient size to contain a circle with a diameter not less than 1 D of the largest helicopter the heliport is intended to serve.
- 3.3.10** A shipboard heliport shall be arranged to ensure that a sufficient and unobstructed air-gap is provided which encompasses the full dimensions of the FATO.

**Note:** Specific guidance on the characteristics of an air-gap is given in the Heliport Manual (Doc 9261). As a general rule, except for shallow superstructures of three stories or less, a sufficient air-gap will be at least 3 m.

- 3.3.11** The FATO shall be located so as to avoid, as far as is practicable, the influence of environmental effects, including turbulence, over the FATO, which could have an adverse impact on helicopter operations.
- 3.3.12** No fixed object shall be permitted around the edge of the TLOF except for objects, which, because of their function, must be located thereon.
- 3.3.13** For any TLOF 1D or greater and any TLOF designed for use by helicopters having a D-value of greater than 16.0 m, objects installed in the obstacle-free sector whose function requires them to be located on the edge of the TLOF shall not exceed a height of 25 cm.
- 3.3.14** For any TLOF 1 D or greater and any TLOF designed for use by helicopters having a D-value of greater than 16.0 m, objects installed in the obstacle-free sector whose function requires them to be located on the edge of the TLOF shall be as low as possible and in any case not exceed a height of 15 cm.
- 3.3.15** For any TLOF designed for use by helicopters having a D-value of 16.0 m or less, and any TLOF having dimensions of less than 1 D, objects in the obstacle-free sector, whose function requires them to be located on the edge of the TLOF, shall not exceed a height of 5 cm.

**Note:** Lighting that is mounted at a height of less than 25 cm is typically assessed for adequacy of visual cues before and after installation.

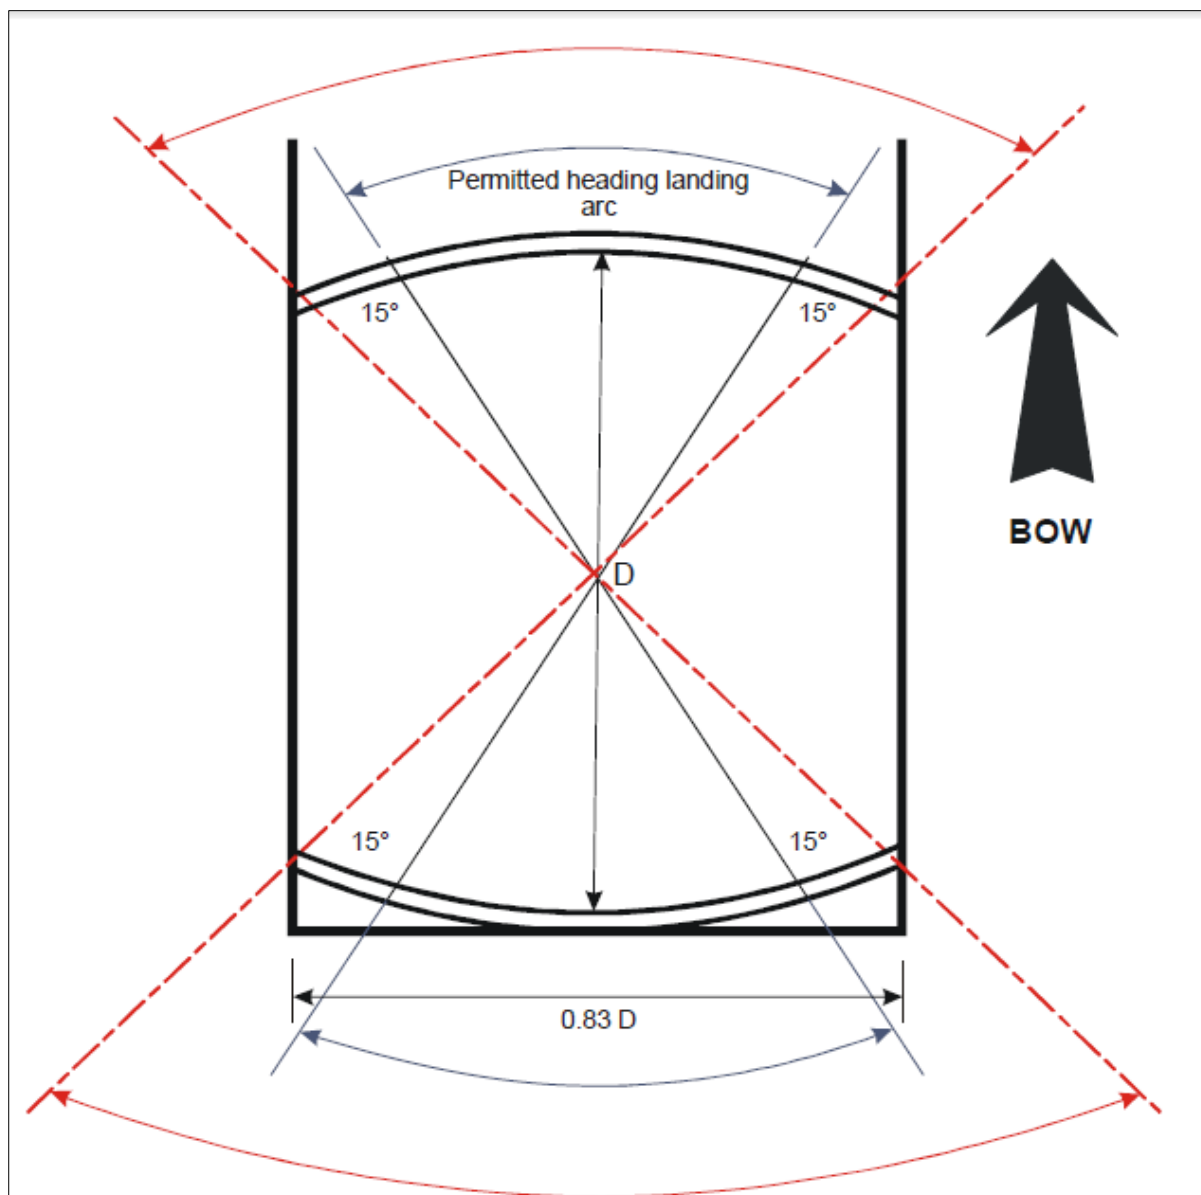

**Figure 3-10. Shipboard permitted landing headings for limited heading operations**

- 3.3.16** Objects whose function requires them to be located within the TLOF (such as lighting or nets) shall not exceed a height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.
- 3.3.17** Safety devices such as safety nets or safety shelves shall be located around the edge of a shipboard heliport, except where structural protection exists, but shall not exceed the height of the TLOF.
- 3.3.18** The surface of the TLOF shall be skid-resistant to both helicopters and persons.

## CHAPTER 4 – OBSTACLE ENVIRONMENT

**Note:** The objectives of the specifications in this chapter are to describe the airspace around heliports so as to permit intended helicopter operations to be conducted safely and to prevent, where appropriate State controls exist, heliports from becoming unusable by the growth of obstacles around them. This is achieved by establishing a series of obstacle limitation surfaces that define the limits to which objects may project into the airspace.

### 4.1 Obstacle limitation surfaces and sectors

**Note 1:** A full description, detailed explanation and visual depiction of the obstacle limitation surfaces and sectors is provided in the Heliport Manual (Doc 9261).

**Note 2:** For guidance on the provision of vertical procedures, see the Heliport Manual (Doc 9261).

**Note 3:** For guidance on the provision of elevated helicopter clearways and elevated surfaces, see the Heliport Manual (Doc 9261).

**Note 4:** See Table 4-1 for dimensions and slopes of surfaces.

#### Approach surface

**4.1.1** Description. An inclined plane or a combination of planes or, when a turn or turns are involved, a complex surface sloping upwards from the inner edge and centred on a line passing through the centre of the FATO.

**4.1.2** Characteristics. The limits of an approach surface shall comprise:

- a) an inner edge horizontal and perpendicular to the centre line of the approach surface, with a minimum width equal to the minimum specified width/diameter of the FATO plus the safety area, and located at:
  - 1) the outer edge of the safety area; or
  - 2) when vertical procedures are being utilized, directly above the outer edge of the safety area.
- b) two side edges originating at the ends of the inner edge diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO; and:
- c) an outer edge horizontal and perpendicular to the centre line of the approach surface at:
  - 1) a height of 152 m (500 ft) above the elevation of the FATO; or
  - 2) when a PinS approach procedure with proceed visually instruction is defined, a specified height above the elevation of the FATO.

**4.1.3** The elevation of the inner edge shall be:


- a) The elevation of the FATO at the point on the inner edge that is intersected by the centre line of the approach surface; or
- b) when vertical procedures are being utilized; the level at which obstacle clearance is achieved.

**4.1.4** The slope(s) of the approach surface shall be measured in the vertical plane containing the centre line of the surface.

**4.1.5** In the case of an approach surface involving a turn or turns, the surface shall be a complex surface containing the horizontal normals to its centre line and the slope of the centre line shall be the same as that for a straight approach surface.

**Note:** See Figure 4-1. For guidance on construction of turns in approach or take-off climb surfaces see the Heliport Manual (Doc 9261).

**4.1.6** Where a curved portion of an approach surface is provided, the sum of the radius of arc defining the centre line of the approach surface and the length of the straight portion originating at the inner edge shall not be less than 575 m.

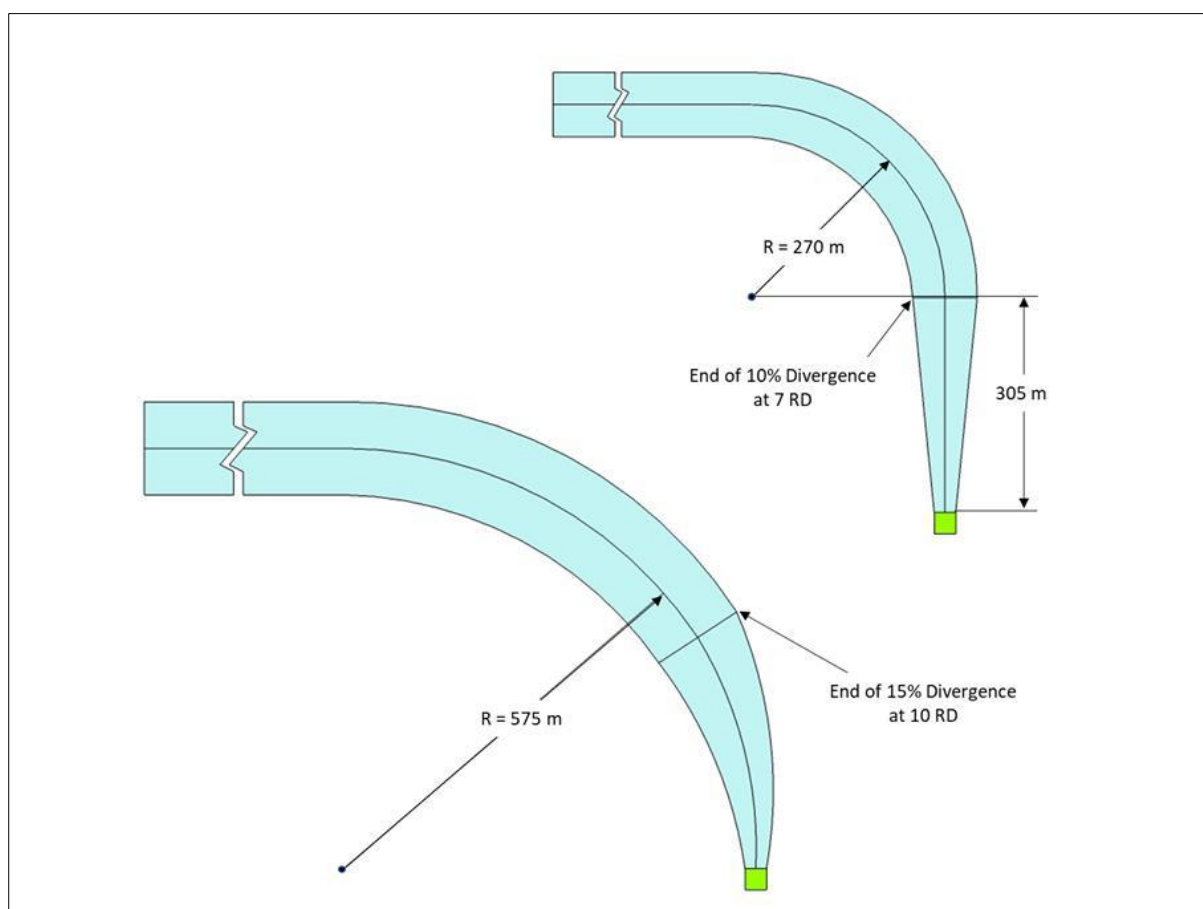

**Figure 4.1. Curved approach and take-off climb surface for all FATOs**

**4.1.7** Any variation in the direction of the centre line of an approach surface shall be designed so as not to necessitate a turn radius less than 270 m.

**Note:** *For heliports intended to be used by helicopters operated in performance class 2 and 3, it is good practice for the approach paths to be selected so as to permit safe forced landing or one-engine-inoperative landings such that, as a minimum requirement, injury to persons on the ground or water or damage to property are minimized. The most critical helicopter type for which the heliport is intended and the ambient conditions may be factors in determining the suitability of such areas.*

### **Transitional surface**

**4.1.8** Description. A complex surface along the side of the safety area and helicopter clearway, when provided, and part of the side of the approach/or take-off climb surface, that slopes upwards and outwards to a predetermined height.

**4.1.9** Characteristics. The limits of a transitional surface shall comprise:

- a) a lower edge beginning at a point on the side of the approach/or take-off climb surface at a specified height extending down the side of the approach/or take-off climb surface to the inner edge and from there along the length of the side of the helicopter clearway, when provided, and safety area, parallel to the centre line of the FATO; and
- b) an upper edge located at a:
  - 1) 45 m (150 ft) above the FATO; or
  - 2) when vertical procedures are being utilized; 15 m (50 ft) above the elevation of the upper edge of the ascent/descent surface.

**4.1.10** The elevation of a point on the lower edge shall be:

- a) along the side of the approach/or take-off climb surface — equal to the elevation of the approach/or take-off climb surface at that point; then
- b) if provided, along the helicopter clearway – equal to the elevation of the helicopter clearway; and
- c) along the safety area — equal to the FATO.

**4.1.11** The slope of the transitional surface shall be measured in a vertical plane at right angles to the centre line of the FATO.

### **Take-off climb surface**

**4.1.12** Description. An inclined plane, a combination of planes or, when a turn or turns is involved, a complex surface sloping upwards from the end of the safety area, or of the helicopter clearway, when provided, and centred on a line passing through the centre of the FATO.

**4.1.13** Characteristics. The limits of a take-off climb surface shall comprise:

- a) an inner edge, horizontal and perpendicular to the centre line of the take-off climb surface, with a minimum width of the width/diameter of:
  - 1) when located at the outer edge of the safety area or helicopter clearway, the FATO plus the safety area; or
  - 2) when located at the outer edge of the elevated helicopter clearway, the elevated helicopter clearway.
- b) two side edges originating at the ends of the inner edge and diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO; and
- c) an outer edge horizontal and perpendicular to the centre line of the take-off climb surface at:
  - 1) a height of 152 m (500 ft) above the elevation of the FATO; or
  - 2) when a PinS departure procedure with proceed visually instruction is defined, a specified height above the elevation of the FATO.

**4.1.14** The elevation of the inner edge shall be:

- a) the elevation of the FATO at the point on the inner edge that is intersected by the centre line of the take-off climb surface; Or
- b) when located at the outer edge of the helicopter clearway, the elevation of the helicopter clearway.

**4.1.15** In the case of a straight take-off climb surface, the slope shall be measured in the vertical plane containing the centre line of the surface.

**4.1.16** In the case of a take-off climb surface involving a turn or turns, the surface shall be a complex surface containing the horizontal normals to its centre line and the slope of the centre line shall be the same as that for a straight take-off climb surface.

**Note:** See Figure 4-1. For guidance on construction of turns in approach or take-off climb surfaces see the Heliport Manual (Doc 9261).

**4.1.17** Where a curved portion of a take-off climb surface, that does not have its inner edge at the outer edge of a clearway, is provided the sum of the radius of arc defining the centre line of the take-off climb surface and the length of the straight portion originating at the inner edge shall not be less than 575 m.

**Note:** Helicopter take-off performance is reduced in a turn and as such a straight portion along the take-off climb surface prior to the start of the curve allows for acceleration.

**4.1.18** Any variation in the direction of the centre line of a take-off climb surface shall be designed so as not to necessitate a turn of radius less than 270 m.

**Note:** For heliports intended to be used by helicopters operated in performance class 2 and 3 it is good practice for the departure paths to be selected so as to permit safe forced landings or one-engine-inoperative landings such that, as a minimum requirement, injury to persons on the ground or water or damage to property are minimized. The most critical helicopter type for which the heliport is intended and the ambient conditions may be factors in determining the suitability of such areas.

**Obstacle-free sector/surface — helidecks**

**4.1.19** Description. A complex surface originating at and extending from, a reference point on the edge of the FATO of a helideck. In the case of a TLOF of less than 1 D, the reference point shall be located not less than 0.5 D from the centre of the TLOF.

**4.1.20** Characteristics. An obstacle-free sector/surface shall subtend an arc of specified angle.

**4.1.21** A helideck obstacle-free sector shall comprise of two components, one above and one below helideck level:

**Note:** See Figure 4-2.

- a) Above helideck level. The surface shall be a horizontal plane level with the elevation of the helideck surface that subtends an arc of at least 210 degrees with the apex located on the periphery of the D circle extending outwards to a distance that will allow for an unobstructed departure path appropriate to the helicopter the helideck is intended to serve.
- b) Below helideck level. Within the (minimum) 210-degree arc, the surface shall additionally extend downward from the edge of the FATO below the elevation of the helideck to water level for an arc of not less than 180 degrees that passes through the centre of the FATO and outwards to a distance that will allow for safe clearance from the obstacles below the helideck in the event of an engine failure for the type of helicopter the helideck is intended to serve.

**Note:** For both the above obstacle-free sectors for helicopters operated in performance class 1 or 2, the horizontal extent of these distances from the helideck will be compatible with the one-engine-inoperative capability of the helicopter type to be used.

**Limited obstacle sector/surface — helidecks**

**Note:** Where obstacles are necessarily located on the structure, a helideck may have a limited obstacle sector (LOS).

**4.1.22** Description. A complex surface originating at the reference point for the obstacle-free sector and extending over the arc not covered by the obstacle-free sector within which the height of obstacles above the level of the TLOF will be prescribed.

**4.1.23** Characteristics. A limited obstacle sector shall not subtend an arc greater than 150 degrees. Its dimensions and location shall be as indicated in Figure 4-3 for a 1 D FATO with coincidental TLOF and Figure 4-4 for a 0.83 D TLOF.

**4.2 Obstacle limitation requirements**

**Note 1:** The requirements for obstacle limitation surfaces are specified on the basis of the intended use of a FATO, i.e. approach manoeuvre to hover or landing, or take-off manoeuvre and type of approach, and are intended to be applied when such use is made of the FATO. In cases where operations are conducted to or from both directions of a FATO, then the function of certain surfaces may be nullified because of more stringent requirements of another lower surface.

**Note 2:** Guidance on obstacle protection surfaces, for when a visual approach slope indicator (VASI) is installed, is given in the onshore section of the Heliport Manual (Doc 9261).

**Note 3:** Guidance on obstacle protection surfaces, or operational limitations, when temporary obstacles are present, is given in the Heliport Manual (Doc 9261).

### **Onshore heliports**

**4.2.1** The following obstacle limitation surfaces shall be established for a FATO at heliports with a PinS approach or departure procedure with a proceed visually instruction:

- a) Take-off climb surface ;
- b) Approach surface ; and
- c) Transitional surfaces.

**Note:** The Procedures for Air Navigation Services — Aircraft Operations, (PANS-OPS, Doc 8168), Volume II, Part IV — Helicopters, details procedure design criteria.

**4.2.2** The following obstacle limitation surfaces shall be established for a FATO at heliports, other than specified in 4.2.1, including heliports with a PinS approach or departure procedure without a proceed visually instruction:

- a) take-off climb surface; and
- b) approach surface.

**4.2.3** The slopes of the obstacle limitation surfaces shall not be greater than, and their other dimensions not less than, those specified in Table 4-1.

**4.2.4** Except for heliports facilitating performance class 1 operations, that have an approach/take-off climb surface with a 4.5 per cent slope design, objects shall be permitted to penetrate the obstacle limitation surface, if the results of an aeronautical study approved by an appropriate authority have reviewed the associated risks and mitigation measures.

**Note 1:** The identified objects may limit the heliport operation.

**Note 2:** Annex 6, Part 3, provides procedures that may be useful in determining the extent of obstacle penetration.

**4.2.5** New objects or extensions of existing objects shall not be permitted above any of the surfaces in 4.2.1 and 4.2.2 except when shielded by an existing immovable object.

**Note:** Circumstances in which the shielding principle may reasonably be applied are described in the Airport Services Manual (Doc 9137), Part 6.

**4.2.6** Existing objects above any of the surfaces in 4.2.1 and 4.2.2 shall, as far as practicable, be removed except when the object is shielded by an existing immovable object.

**Note:** The application of curved approach or take-off climb surfaces and/or the utilization of vertical procedures may alleviate the problems created by objects infringing these surfaces.

**4.2.7** A heliport shall have at least two approach and take-off climb surfaces separated by not less than 135°.

**Table 4-1. Approach and take-off climb surfaces slope design categories**

| <i>Surfaces and dimensions</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <i>Slope design categories</i>                       |                                                        |                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|--------------------------------------------------------|-------------------------------------------|
| <b>Approach and take-off climb surface:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <i>A</i>                                             | <i>B</i>                                               | <i>C</i>                                  |
| Length of inner edge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Width of safety area                                 | Width of safety area                                   | Width of safety area                      |
| Location of inner edge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Safety area boundary (clearway boundary if provided) | Safety area boundary                                   | Safety area boundary                      |
| <b>Divergence:</b> (1 <sup>st</sup> and 2 <sup>nd</sup> section)<br>Day use only<br>Night use                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 10%<br>15%                                           | 10%<br>15%                                             | 10%<br>15%                                |
| <b>First section:</b><br>Length<br>Slope<br>Outer width                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 3 386m<br>4.5%<br>(1:22.2)<br>(b)                    | 245M<br>8%<br>(1:12.5)<br>N/A                          | 1 220m<br>12.5%<br>(1:8)<br>(b)           |
| <b>Second section:</b><br>Length<br>Slope<br>Outer width<br>Total length from inner edge (a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | N/A<br>N/A<br>N/A<br>3 386 m <sup>c</sup>            | 830m<br>16%<br>(1:6.25)<br>(b)<br>1 075 m <sup>c</sup> | N/A<br>N/A<br>N/A<br>1 220 m <sup>c</sup> |
| <b>Transitional surface:</b><br>Slope<br>Height                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 50%<br>(1:2)<br>45 m <sup>d</sup>                    | 50%<br>(1:2)<br>45 m <sup>d</sup>                      | 50%<br>(1:2)<br>45 m <sup>d</sup>         |
| <p>a. The approach and take-off climb surface lengths of 3 386 m, 1 075 m and 1 220 m associated with the respective slopes brings the helicopter to 152 m (500 ft) above FATO elevation.</p> <p>b. Seven rotor diameters overall width for day operations or 10 rotor diameters overall width for night operations.</p> <p>c. This length may be reduced if vertical procedures are in place or extended/reduced if the approach or take-off climb surface is extended/reduced to meet the OCS of the PinS approach or departure procedure.</p> <p>d. See 4.1.9 b).</p> <p>Note. — Guidance on the application of slope categories is provided in the Heliport Manual (Doc 9261).</p> |                                                      |                                                        |                                           |



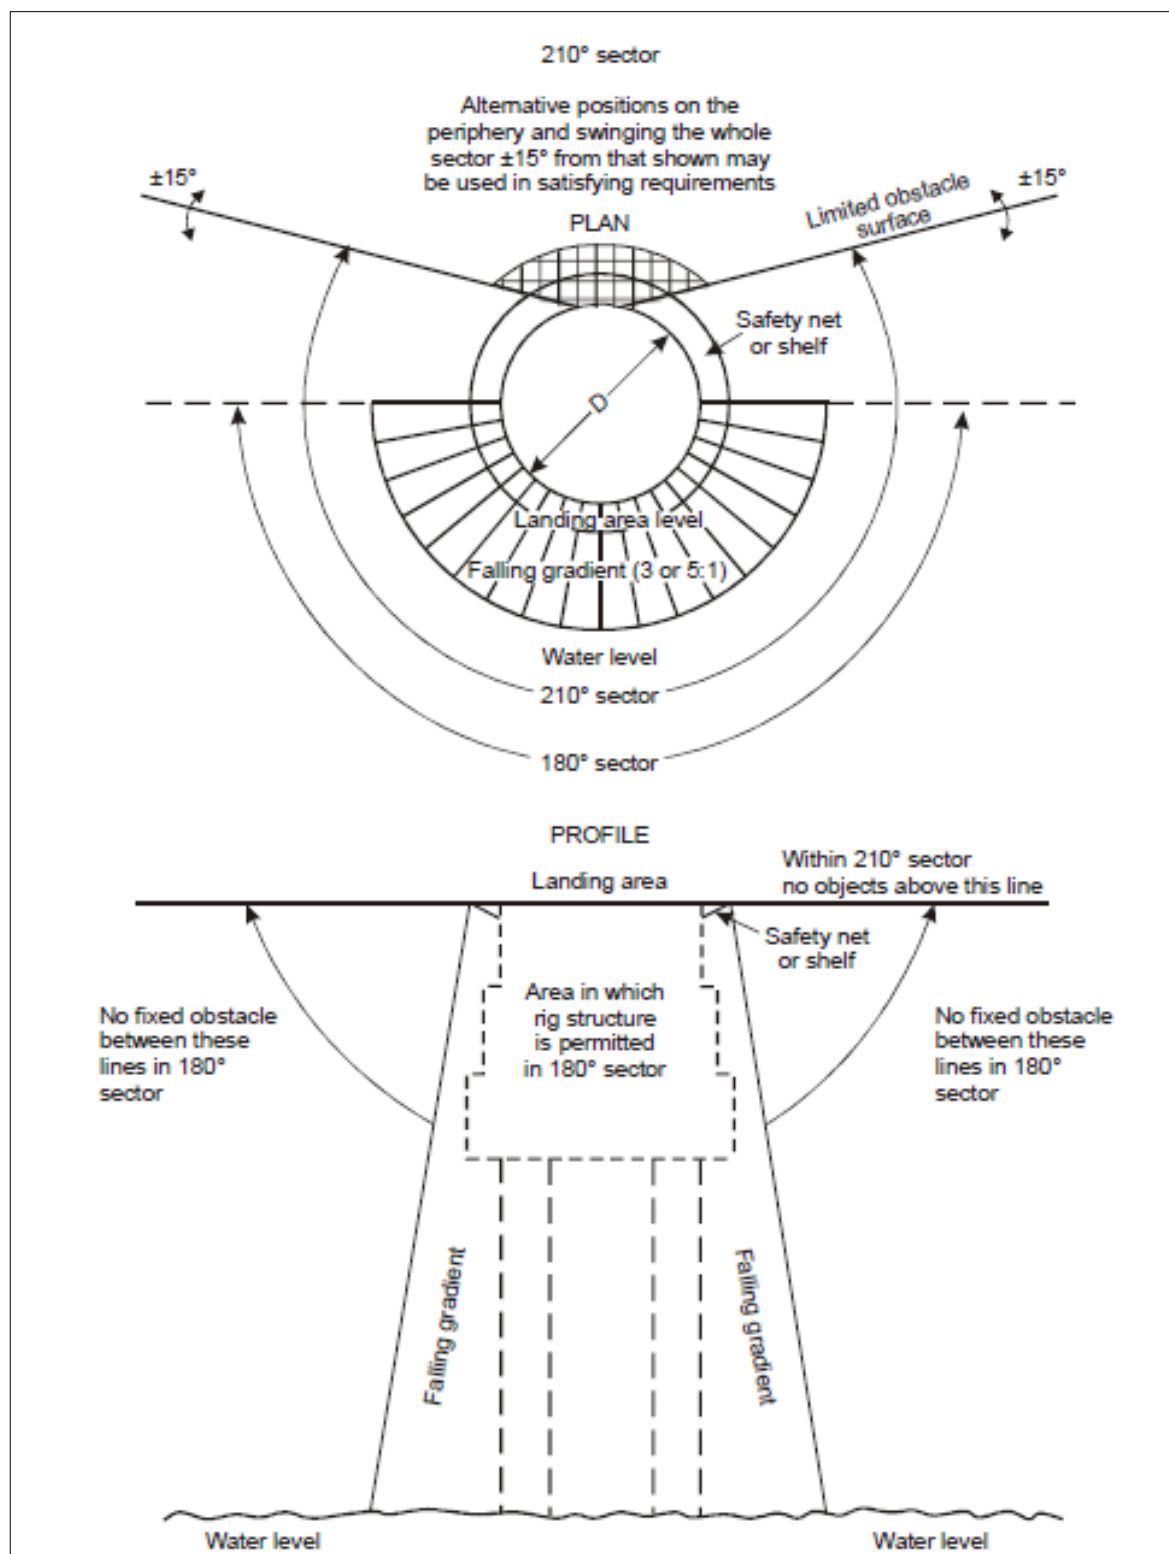


Figure 4-2. Helideck obstacle-free sector

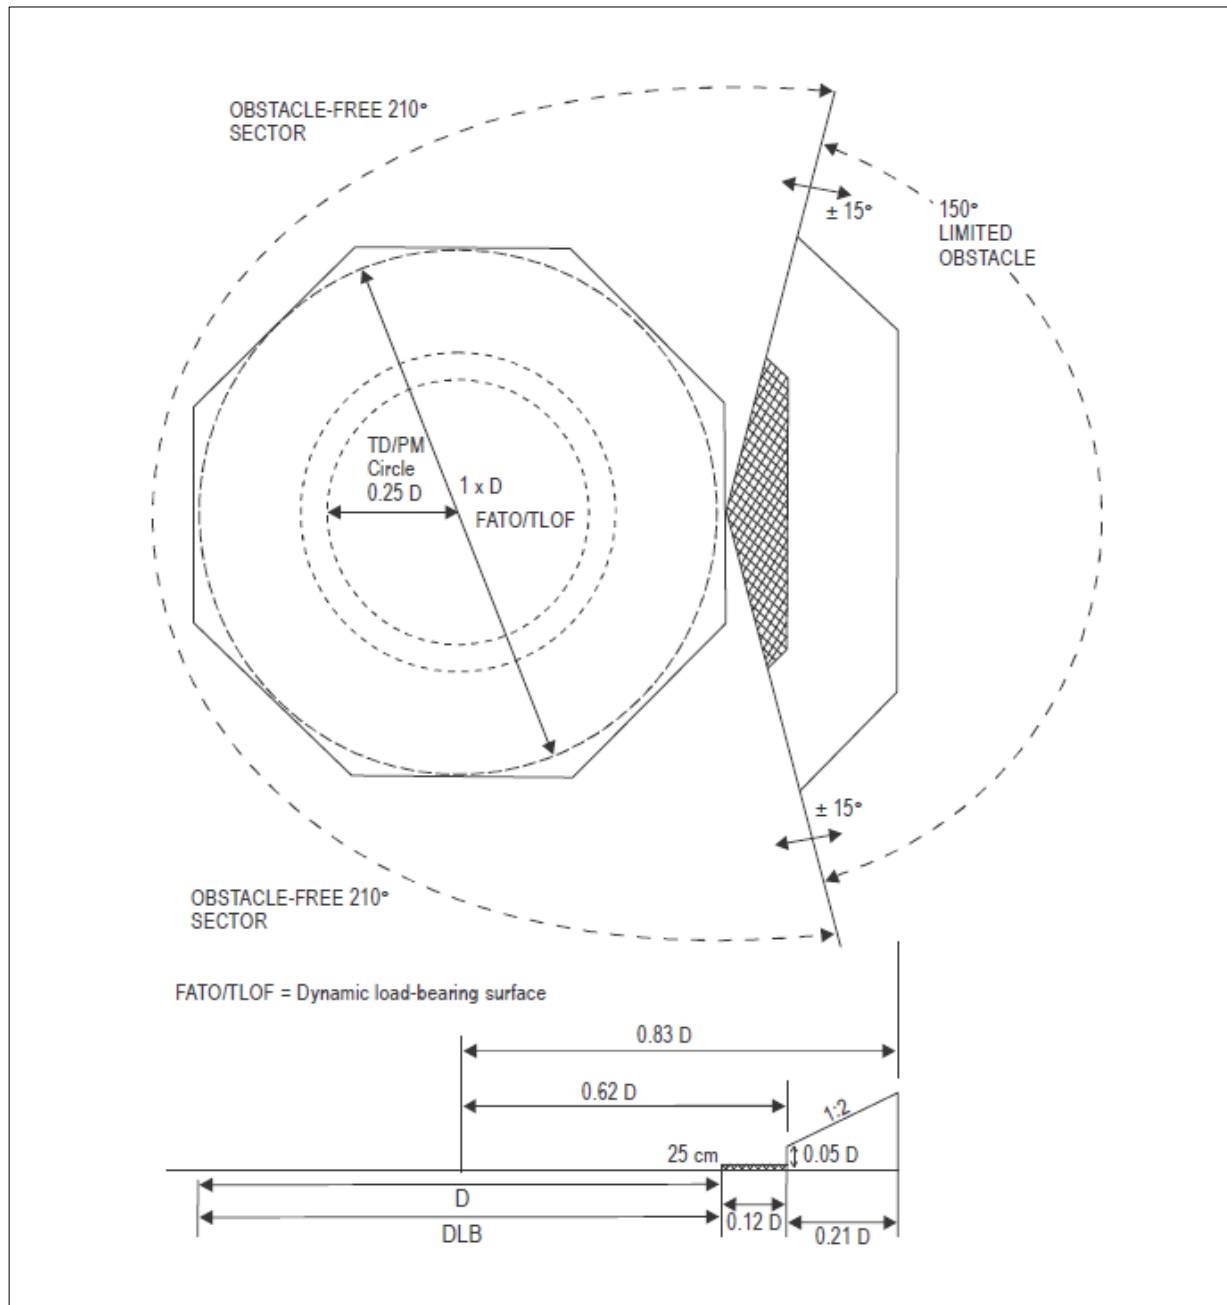

**Figure 4-3. Helideck obstacle limitation sectors and surfaces for a FATO and coincidental TLOF of 1 D and larger**

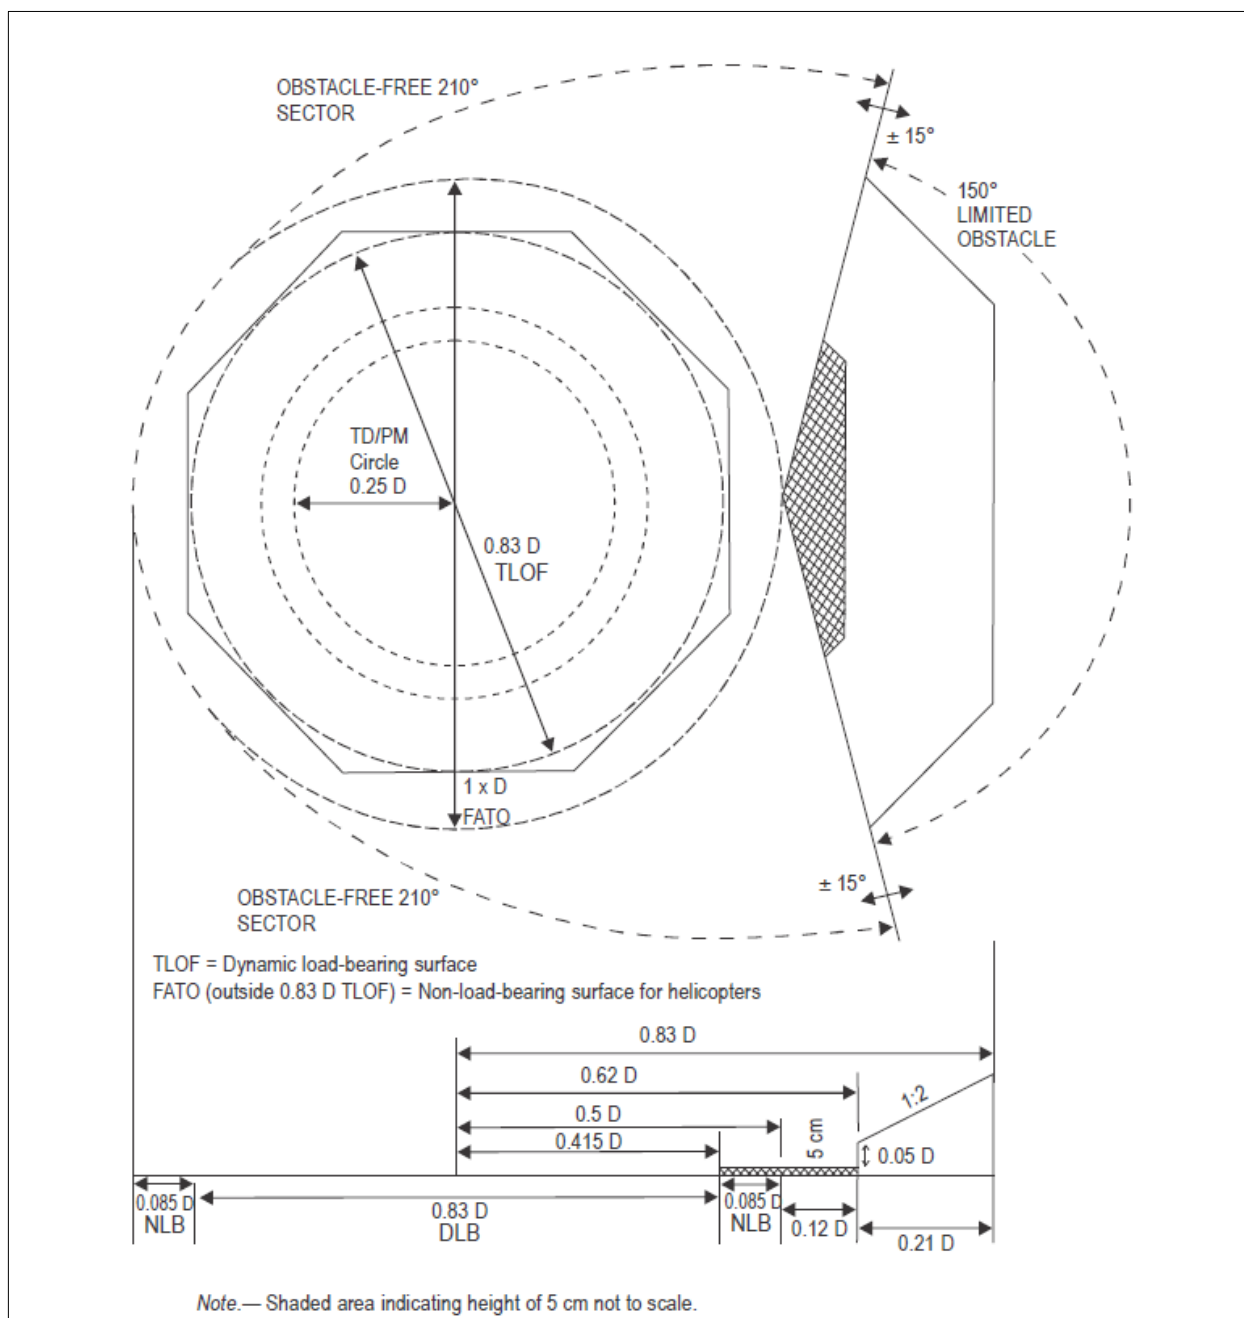

**Figure 4-4. Helideck obstacle limitation sectors and surfaces for a TLOF of 0.83 D and larger**

**Note:** See the Heliport Manual (Doc 9261) for guidance.

### Helidecks

**4.2.8** A helideck shall have an obstacle-free sector.

**Note:** A helideck may have a LOS (see 4.1.23).

**4.2.9** There shall be no fixed obstacles within the obstacle-free sector above the obstacle-free surface.

**4.2.10** In the immediate vicinity of the helideck, obstacle protection for helicopters shall be provided below the helideck level. This protection shall extend over an arc of at least 180 degrees with the origin at the centre of the FATO, with a descending gradient having a ratio of one unit horizontally to five units vertically from the edges of the FATO within the 180-degree sector. This descending gradient may be reduced to a ratio of one unit horizontally to three units vertically within the 180-degree sector for multi-engine helicopters operated in performance class 1 or 2. (See Figure 4-2.)

**Note:** Where there is a requirement to position, at sea surface level, one or more offshore support vessel(s) (e.g. a Standby Vessel) essential to the operation of a fixed or floating offshore facility, but located within the proximity of the fixed or floating offshore facility, any offshore support vessel(s) would need to be positioned so as not to compromise the safety of helicopter operations during take-off departure and/or approach to landing.

**4.2.11** For a TLOF of 1 D and larger, within the 150-degree limited obstacle surface/sector out to a distance of 0.12 D measured from the point of origin of the limited obstacle sector, objects shall not exceed a height of 25 cm above the TLOF. Beyond that arc, out to an overall distance of a further 0.21 D measured from the end of the first sector, the limited obstacle surface rises at a rate of one unit vertically for each two units horizontally originating at a height 0.05 D above the level of the TLOF. (See Figure 4-3.)

**Note:** Where the area enclosed by the TLOF perimeter marking is a shape other than circular, the extent of the LOS segments are represented as lines parallel to the perimeter of the TLOF rather than arcs. Figure 4-3 has been constructed on the assumption that an octagonal helideck arrangement is provided. Further guidance for square (quadrilateral) and circular FATO and TLOF arrangements is given in the Heliport Manual (Doc 9261).

**4.2.12** For a TLOF less than 1 D within the 150-degree limited obstacle surface/sector out to a distance of 0.62 D and commencing from a distance 0.5 D, both measured from the centre of the TLOF, objects shall not exceed a height of 5 cm above the TLOF. Beyond that arc, out to an overall distance of 0.83 D from the centre of the TLOF, the limited obstacle surface rises at a rate of one unit vertically for each two units horizontally originating at a height 0.05 D above the level of the TLOF. (See Figure 4-4.)

**Note:** Where the area enclosed by the TLOF perimeter marking is a shape other than circular, the extent of the LOS segments are represented as lines parallel to the perimeter of the TLOF rather than arcs. Figure 4-4 has been constructed on the assumption that an octagonal helideck arrangement is provided. Further guidance for square (quadrilateral) and circular FATO and TLOF arrangements is given in the Heliport Manual (Doc 9261).

### **Shipboard heliports**

**4.2.13** The specifications in 4.2.16 and 4.2.22 shall be applicable for shipboard heliports completed on or after 1 January 2012.

*Purpose-built heliports located forward or aft*

**4.2.14** When helicopter operating areas are provided in the bow or stern of a ship they shall apply the obstacle criteria for helidecks.

*Amidships location — purpose-built and non-purpose-built*

**4.2.15** Forward and aft of a TLOF of 1 D and larger shall be two symmetrically located sectors, each covering an arc of 150 degrees, with their apexes on the periphery of the TLOF. Within the area enclosed by these two sectors, there shall be no objects rising above the level of the TLOF, except those aids essential for the safe operation of a helicopter and then only up to a maximum height of 25 cm.


**4.2.16** Objects whose function requires them to be located within the TLOF (such as lighting or nets) shall not exceed a height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.

**Note:** *Examples of potential hazards include nets or raised fittings on the deck that might induce dynamic rollover for helicopters equipped with skids.*

**4.2.17** To provide further protection from obstacles fore and aft of the TLOF, rising surfaces with gradients of one unit vertically to five units horizontally shall extend from the entire length of the edges of the two 150-degree sectors. These surfaces shall extend for a horizontal distance equal to at least 1 D of the largest helicopter the TLOF is intended to serve and shall not be penetrated by any obstacle. (See Figure 4-5.)

*Non-purpose-built heliports - Ship's side location*

**4.2.18** No objects shall be located within the TLOF except those aids essential for the safe operation of a helicopter (such as nets or lighting) and then only up to a maximum height of 2.5 cm. Such objects shall only be present if they do not represent a hazard to helicopters.

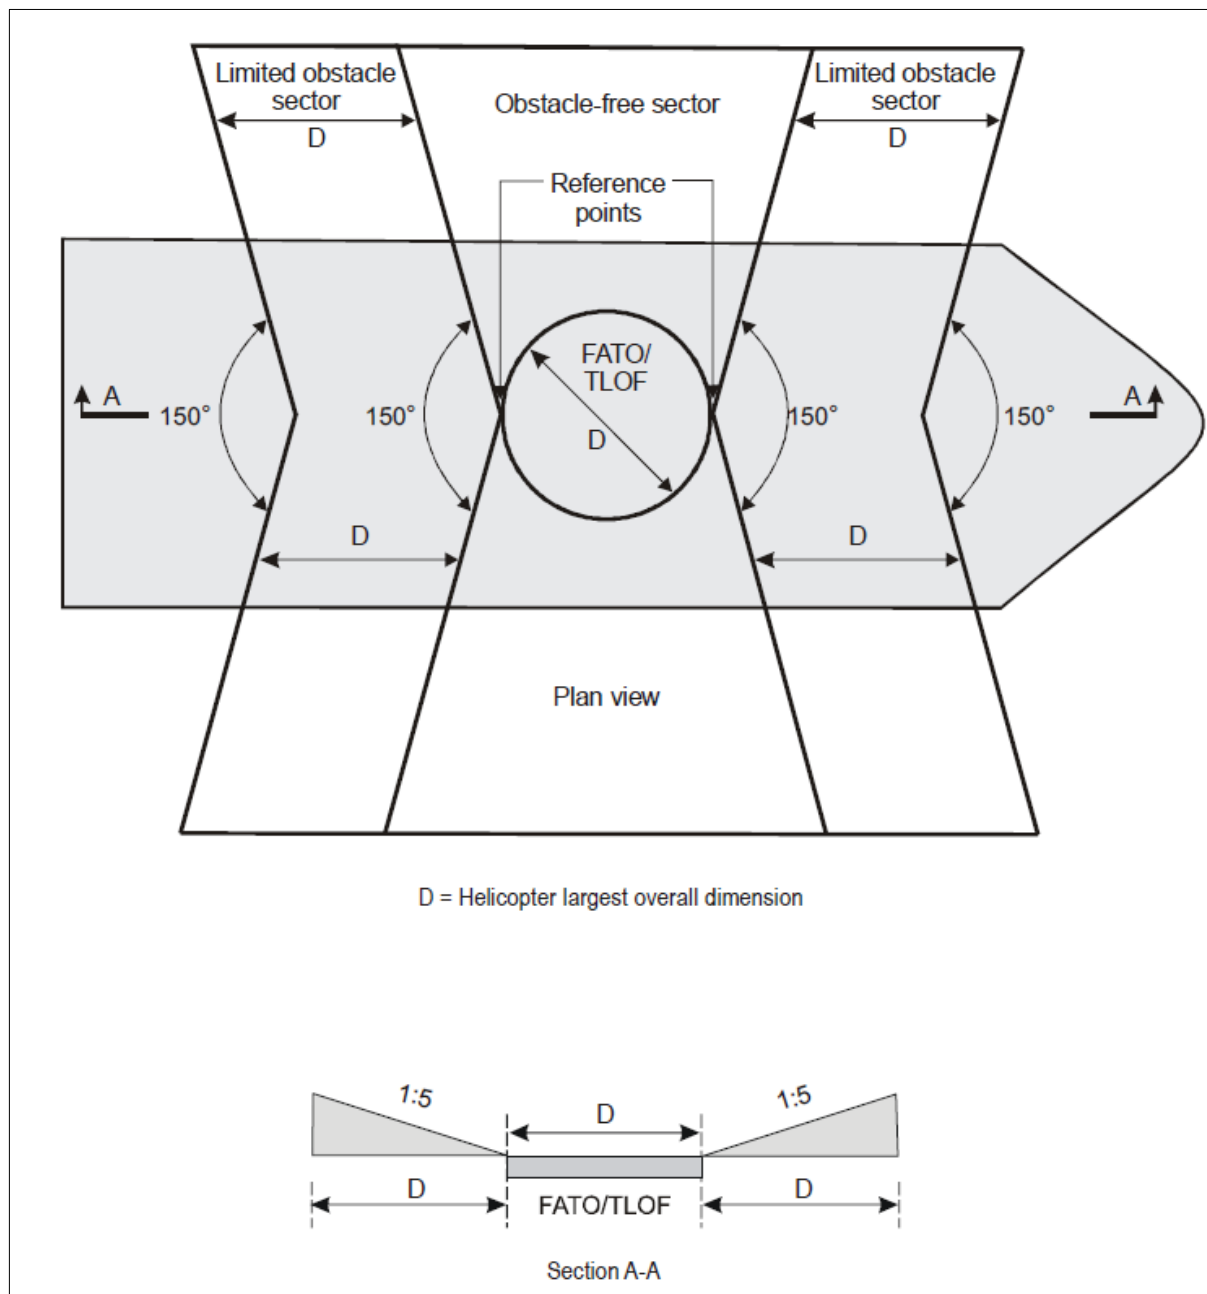


**Figure 4-5. Amidship's location — shipboard heliport obstacle limitation surfaces**

**4.2.19** From the fore and aft mid-points of the D circle in two segments outside the circle, limited obstacle areas shall extend to the ship's rail to a fore and aft distance of 1.5 times the fore-to-aft-dimension of the TLOF, located symmetrically about the athwartships bisector of the D circle. Within these areas there shall be no objects rising above a maximum height of 25 cm above the level of the TLOF. (See Figure 4-6.) Such objects shall only be present if they do not represent a hazard to helicopters.

**4.2.20** A limited obstacle sector horizontal surface shall be provided, at least 0.25 D beyond the diameter of the D circle, which shall surround the inboard sides of the TLOF to the fore and aft mid-points of the D circle. The limited obstacle sector shall continue to the

ship's rail to a fore and aft distance of 2.0 times the fore-to-aft dimension of the TLOF, located symmetrically about the athwartships bisector of the D circle. Within this sector there shall be no objects rising above a maximum height of 25 cm above the level of the TLOF.

**Note:** Any objects located within the areas described in 4.2.19 and 4.2.20 that exceed the height of the TLOF are notified to the helicopter operator using a ship's helicopter landing area plan. For notification purposes it may be necessary to consider immovable objects beyond the limit of the surface prescribed in 4.2.19 particularly if objects are significantly higher than 25 cm and in close proximity to the boundary of the LOS. See the Heliport Manual (Doc 9261) for guidance.

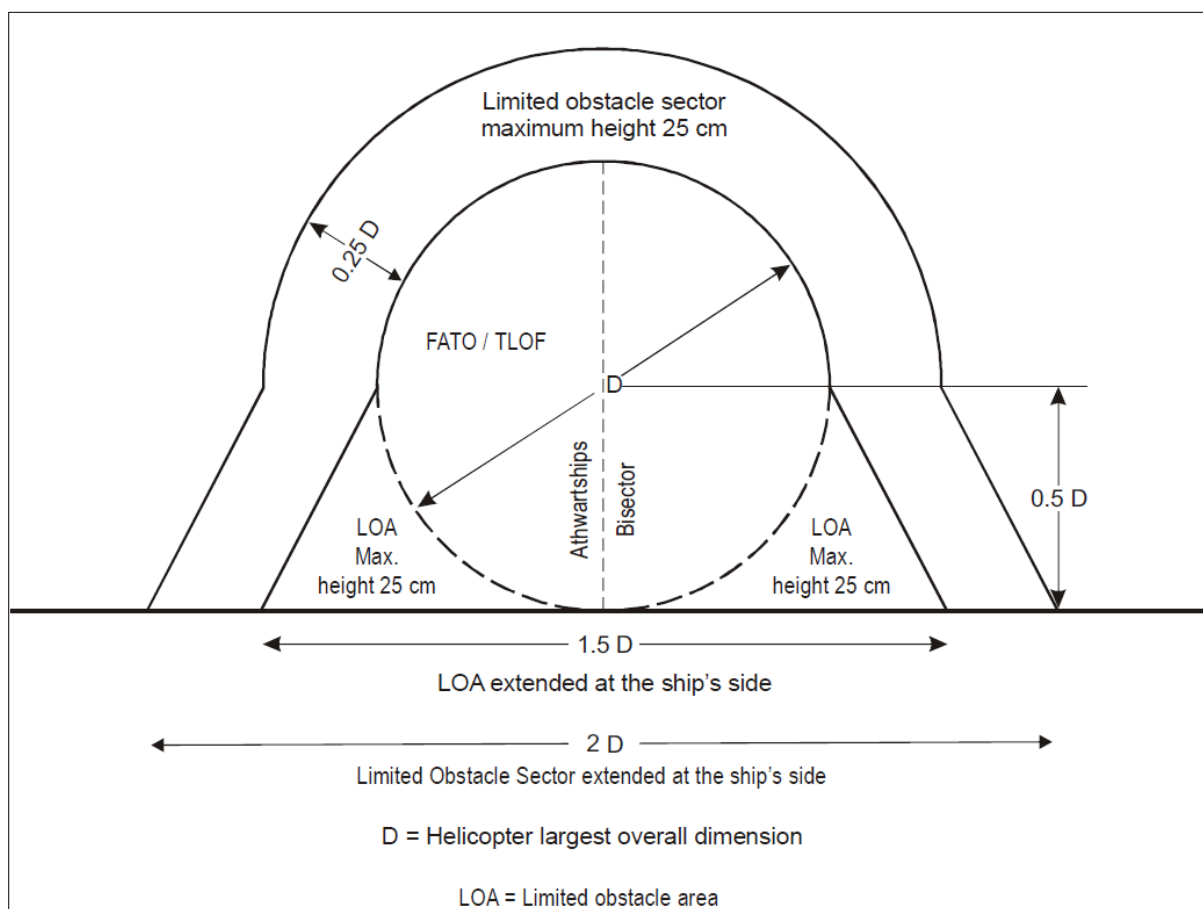

**Figure 4-6. Ships-side non-purpose-built heliport obstacle limitation sectors and surfaces**

#### Winching areas

**4.2.21** An area designated for winching on-board ships shall be comprised of a circular clear zone of diameter 5 m and extending from the perimeter of the clear zone, a concentric manoeuvring zone of diameter  $2D$ . (See Figure 4-7.)

**4.2.22** The manoeuvring zone shall be comprised of two areas:

- the inner manoeuvring zone extending from the perimeter of the clear zone and of a circle of diameter not less than  $1.5D$ ; and


- b) the outer manoeuvring zone extending from the perimeter of the inner manoeuvring zone and of a circle of diameter not less than 2 D.

**4.2.23** Within the clear zone of a designated winching area, no objects shall be located above the level of its surface.

**4.2.24** Objects located within the inner manoeuvring zone of a designated winching area shall not exceed a height of 3 m.

**4.2.25** Objects located within the outer manoeuvring zone of a designated winching area shall not exceed a height of 6 m.

**Note:** See the Heliport Manual (Doc 9261) for guidance.

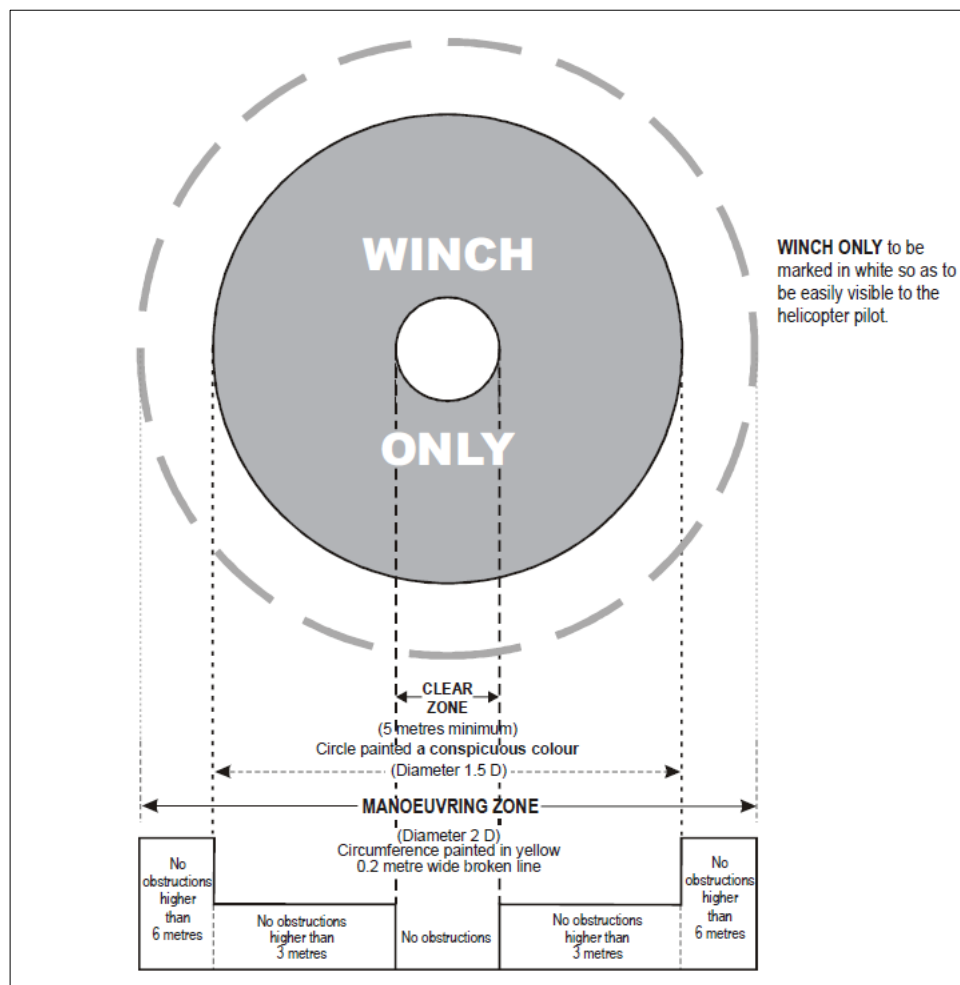

**Figure 4-12. Winching area of a ship**

## CHAPTER 5 – VISUAL AIDS

**Note 1:** *The procedures used by some helicopters require that they utilize a FATO having characteristics similar in shape to a runway for fixed wing aircraft. For the purpose of this chapter a FATO having characteristics similar in shape to a runway is considered as satisfying the concept for a “runway-type FATO”. For such arrangements it is sometimes necessary to provide specific markings to enable a pilot to distinguish a runway-type FATO during an approach. Appropriate markings are contained within sub-sections entitled “Runway-type FATOs”. The requirements applicable to all other types of FATOs are given within sub-sections entitled “All FATOs except runway-type FATOs”.*

**Note 2:** *It has been found that, on surfaces of light colour, the conspicuity of white and yellow markings can be improved by outlining them in black.*

**Note 3:** *Guidance is given in the Heliport Manual (Doc 9261) on marking the maximum allowable mass (5.2.3) and the D-value (5.2.4) on the heliport surface to avoid confusion between markings where metric units are used and markings where imperial units are used.*

**Note 3:** *For a non-purpose-built heliport located on a ship's side the surface colour of the main deck can vary from ship to ship and therefore some discretion may need to be exercised in the colour selection of heliport paint schemes; the objective being to ensure that the markings are conspicuous against the surface of the ship and the operating background.*

### 5.1 Indicators

#### 5.1.1 Wind direction indicators

##### **Application**

**5.1.1.1** A heliport shall be equipped with at least one wind direction indicator.

##### **Location**

**5.1.1.2** A wind direction indicator shall be located so as to indicate the wind conditions over the FATO and TLOF and in such a way as to be free from the effects of airflow disturbances caused by nearby objects or rotor downwash. It shall be visible from a helicopter in flight, in a hover or on the movement area.

**5.1.1.3** Where a TLOF and/or FATO may be subject to a disturbed airflow, then additional wind direction indicators located close to the area shall be provided to indicate the surface wind on the area.

**Note:** *Guidance on the location of wind direction indicators is given in the Heliport Manual (Doc 9261).*

##### **Characteristics**

**5.1.1.4** A wind direction indicator shall be constructed so that it gives a clear indication of the direction of the wind and a general indication of the wind speed.

- 5.1.1.5** An indicator shall be a truncated cone made of lightweight fabric and shall have the following minimum dimensions:

|                               | Surface-level<br>heliports | Elevated heliports<br>and helidecks |
|-------------------------------|----------------------------|-------------------------------------|
| <i>Length</i>                 | <i>2.4 m</i>               | <i>1.2 m</i>                        |
| <i>Diameter (larger end)</i>  | <i>0.6 m</i>               | <i>0.3 m</i>                        |
| <i>Diameter (smaller end)</i> | <i>0.3 m</i>               | <i>0.15 m</i>                       |

- 5.1.1.6** The colour of the wind direction indicator shall be so selected as to make it clearly visible and understandable from a height of at least 200 m (650 ft) above the heliport, having regard to background. Where practicable, a single colour, preferably white or orange, shall be used. Where a combination of two colours is required to give adequate conspicuity against changing backgrounds, they shall preferably be orange and white, red and white, or black and white, and shall be arranged in five alternate bands the first and last band being the darker colour.

- 5.1.1.7** A wind direction indicator at a heliport intended for use at night shall be illuminated.

## 5.2 Markings and markers

**Note:** See CAR 139, PART 1, 5.2.1.4, Note 1, concerning improving conspicuity of markings.

### 5.2.1 Winching area marking

**Note:** The objective of the winching area markings is to provide visual cues which assist a helicopter to be positioned over, and retained within, an area from which a passenger or equipment can be lowered or raised.

#### *Application*

- 5.2.1.1** Winching area markings shall be provided at a designated winching area. (See Figure 4-12.)

#### *Location*

- 5.2.1.2** Winching area markings shall be located so that their centre(s) coincides with the centre of the clear zone of the winching area. (See Figure 4-12.)

#### *Characteristics*

- 5.2.1.3** Winching area markings shall comprise a winching area clear zone marking and a winching area manoeuvring zone marking.
- 5.2.1.4** A winching area clear zone marking shall consist of a solid circle of diameter not less than 5 m and of a conspicuous colour.
- 5.2.1.5** A winching area manoeuvring zone marking shall consist of a broken circle line of 30 cm in width and of a diameter not less than 2 D and be marked in a conspicuous colour. Within it “WINCH ONLY” shall be marked to be easily visible to the pilot.

### 5.2.2 Heliport identification marking

## Application

5.2.2.1 Heliport identification markings shall be provided at a heliport.

### 5.2.2.2 *Location — All FATOs except runway-type FATOs*

5.2.2.3 A heliport identification marking shall be located at or near the centre of the FATO.

**Note 1:** *The objective of a heliport identification marking is to provide to the pilot an indication of the presence of a heliport and, by its form, likely usage; the preferred direction(s) of approach; or the FATO orientation within the helideck obstacle environment.*

**Note 2:** *For other than helidecks, the preferred direction(s) of approach corresponds to the median of the departure/arrival surface(s).*

**Note 3:** *For helidecks, the bar of the “H” points to the centre of the Limited Obstacle Sector.*

**Note 4:** *If the touchdown/positioning marking is offset, the heliport identification marking is established in the centre of the touchdown/positioning marking.*

**Note 5:** *On a FATO, which does not contain a TLOF and which is marked with an aiming point marking (see 5.2.7, the heliport identification marking is established in the centre of the aiming point marking as shown in Figure 5-1 and 5-1A.*

5.2.2.4 On a FATO which contains a TLOF, a heliport identification marking shall be located in the FATO so the position of it coincides with the centre of the TLOF.

### *Location — Runway-type FATOs*

5.2.2.5 A heliport identification marking shall be located in the FATO and when used in conjunction with FATO designation markings, shall be displayed at each end of the FATO as shown in Figure 5-2.

## Characteristics


5.2.2.6 A heliport identification marking, except for a heliport at a hospital, shall consist of a letter H, white in colour. The dimensions of the H marking shall be no less than those shown in Figure 5-3 and where the marking is used for a runway-type FATO, its dimensions shall be increased by a factor of 3 as shown in Figure 5-2.

5.2.2.7 A heliport identification marking for a heliport at a hospital shall consist of a letter H, red in colour, on a white cross made of squares adjacent to each of the sides of a square containing the H as shown in Figure 5-3.


5.2.2.8 A heliport identification marking shall be oriented with the cross arm of the H at right angles to the preferred final approach direction. For a helideck the cross arm shall be on or parallel to the bisector of the obstacle-free sector. For a non-purpose-built shipboard heliport located on a ship’s side, the cross arm shall be parallel with the side of the ship.

5.2.2.9 On a helideck or a shipboard heliport where the D-value is 16.0 m or larger, the size of the heliport identification H marking shall have a height of 4 m with an overall width not exceeding 3 m and a stroke width not exceeding 0.75 m. Where the D-value is less than 16.0 m, the size of the heliport identification H marking shall have

a height of 3 m with an overall width not exceeding 2.25 m and a stroke width not exceeding 0.5 m.

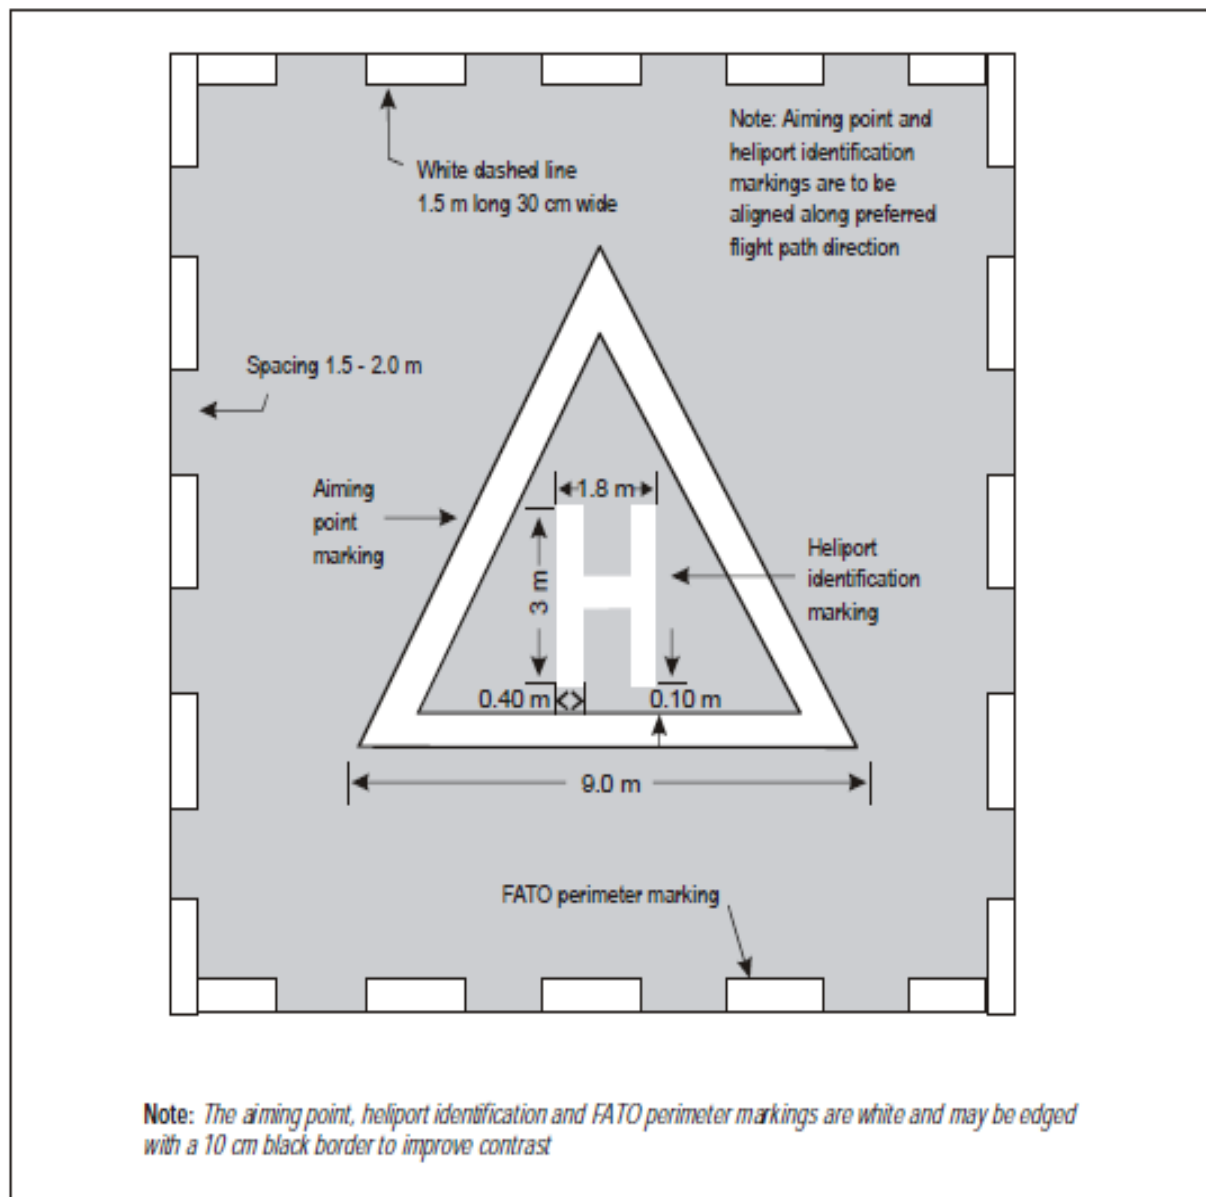

**Figure 5-1. Combined heliport identification, aiming point and FATO perimeter marking**

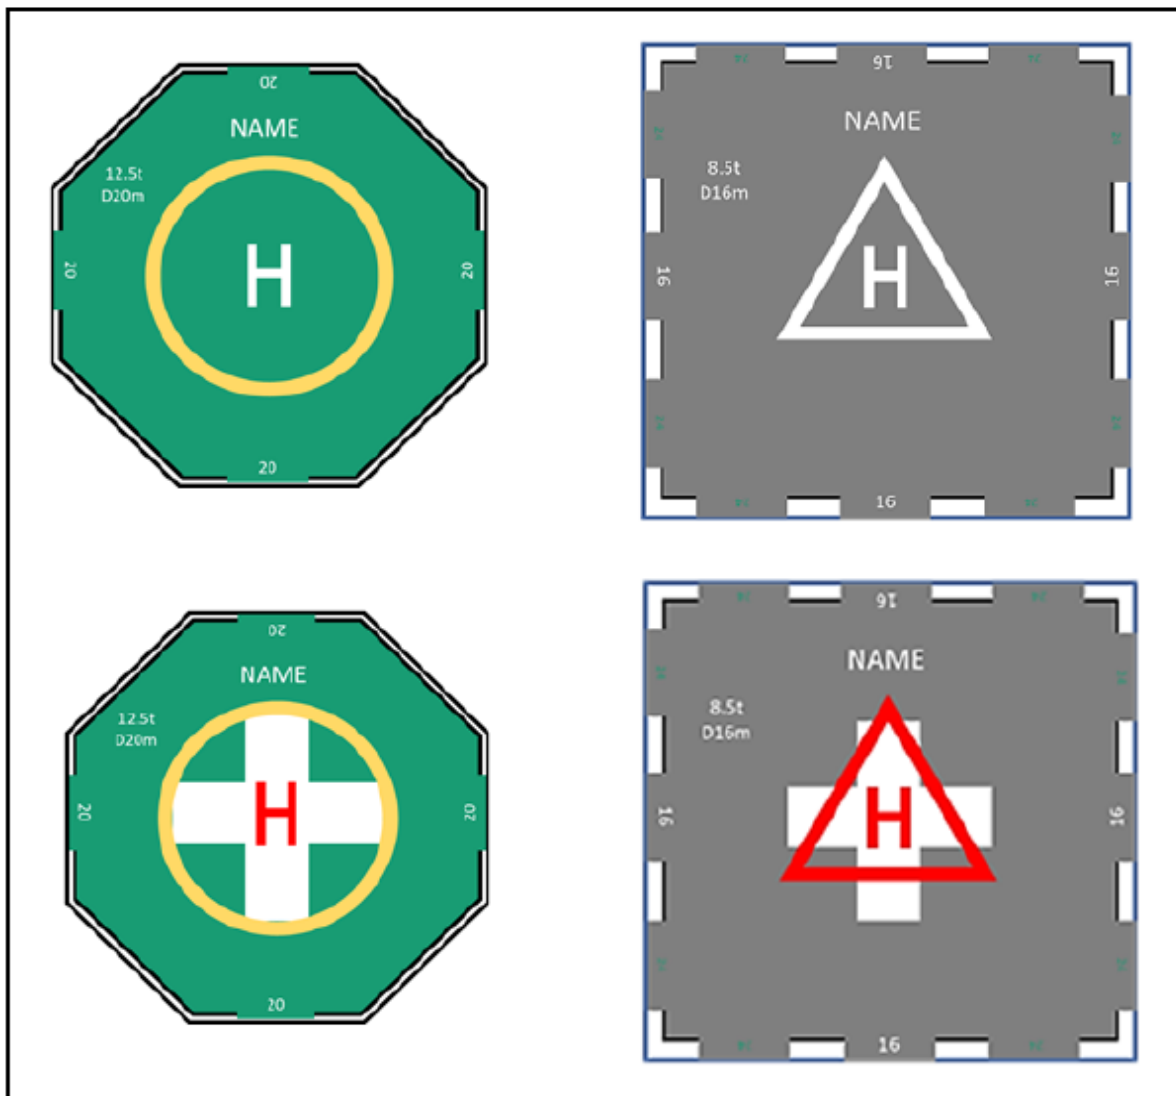

**Figure 5-2. Heliport identification markings with TLOF and aiming markings for heliport and hospital heliport**

### 5.2.3 Maximum allowable mass marking

**Note 1:** The objective of the maximum allowable mass marking is to provide the mass limitation of the heliport such that it is visible to the pilot from the preferred final approach direction.

**Note 2:** Where States express the maximum allowable mass in pounds, it is not appropriate to suffix with the letter “t” which is used only to indicate metric tonnes. Guidance on markings where States use imperial units is given in the Heliport Manual (Doc 9261).

#### Application

- 5.2.3.1 A maximum allowable mass marking shall be displayed at an elevated heliport, a helideck and a shipboard heliport.
- 5.2.3.2 A maximum allowable mass marking shall be displayed at a surface-level heliport.

**Location**


- 5.2.3.3** A maximum allowable mass marking shall be located within the TLOF or FATO and so arranged as to be readable from the preferred final approach direction.

**Characteristics**

- 5.2.3.4** A maximum allowable mass marking shall consist of a one-, two- or three-digit number.



**Figure 5-3. FATO designation marking and heliport identification marking for a runway-type FATO**

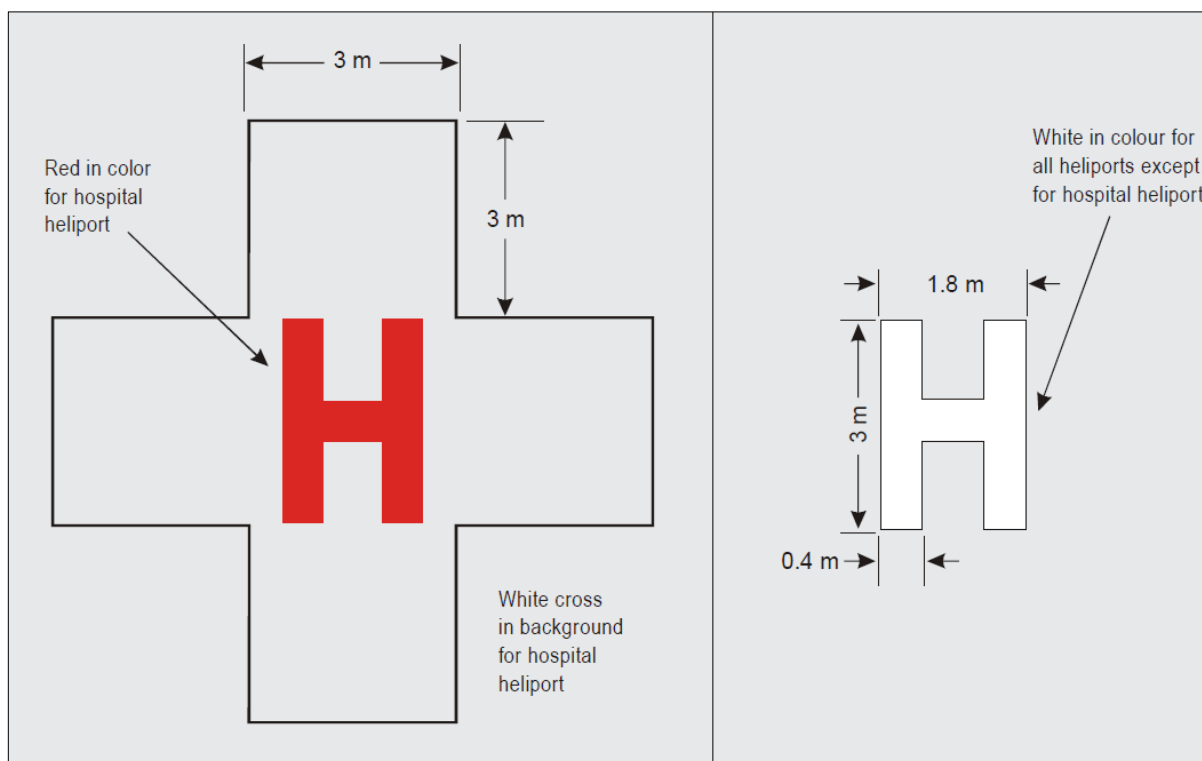

**Figure 5-4. Hospital heliport identification and heliport identification marking**

- 5.2.3.5** The maximum allowable mass shall be expressed in tonnes (1 000 kg) rounded down to the nearest 1 000 kg followed by a letter “t”. Where States use mass in pounds, the maximum allowable mass marking shall indicate the allowable helicopter mass in thousands of pounds rounded down to the nearest 1 000 lbs.
- 5.2.3.6** The maximum allowable mass shall be expressed to the nearest 100 kg. The marking shall be presented to one decimal place and rounded to the nearest 100 kg followed by the letter “t”. Where States use mass in pounds, the maximum allowable mass marking shall indicate the allowable helicopter mass in hundreds of pounds rounded to the nearest 100 lb.
- 5.2.3.7** When the maximum allowable mass is expressed to 100 kg, the decimal place shall be preceded with a decimal point marked with a 30 cm square.

***All FATOs except runway-type FATOs***

- 5.2.3.8** The numbers and the letter of the marking shall have a colour contrasting with the background and shall be in the form and proportion shown in Figure 5-4 for a D-value of more than 30 m. For D-value between 15 m to 30 m the height of the numbers and the letter of the marking shall be a minimum of 90 cm, and for a D-value less than 15 m the height of the numbers and the letter of the marking shall be a minimum of 60 cm, each with a proportional reduction in width and thickness.

***Runway-type FATOs***

- 5.2.3.9** The numbers and the letter of the marking shall have a colour contrasting with the background and shall be in the form and proportion shown in Figure 5-4.

**5.2.4 D-value marking**

***Note:*** The objective of the D-value marking is to provide to the pilot the “D” of the largest helicopter that can be accommodated on the heliport. This value may differ in size from the FATO and the TLOF provided in compliance with Chapter 3.

***Application***

***All FATOs except runway-type FATOs***

- 5.2.4.1** The D-value marking shall be displayed at a helideck and at a shipboard heliport.


***Runway-type FATOs***

***Note:*** The D-value is not required to be marked on a heliport with a runway-type FATO.

- 5.2.4.2** The D-value marking shall be displayed at surface-level and elevated heliports.

***Location***

- 5.2.4.3** A D-value marking shall be located within the TLOF or FATO and so arranged as to be readable from the preferred final approach direction.

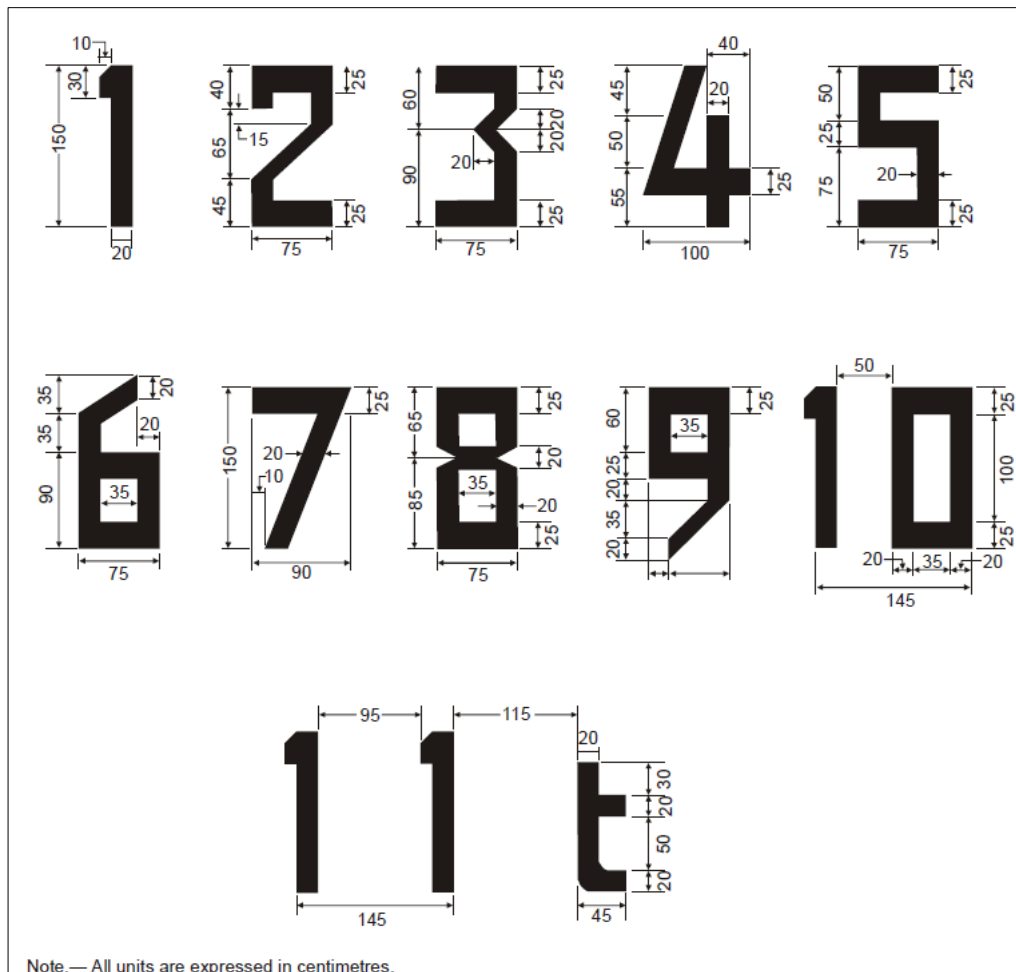

**Figure 5-5. Form and proportions of numbers and letters**

- 5.2.4.4** Where there is more than one approach direction, additional D-value markings shall be provided such that at least one D-value marking is readable from the final approach directions. For a non-purpose-built heliport located on a ship's side, D-value markings shall be provided on the perimeter of the D circle at the 2 o'clock, 10 o'clock and 12 o'clock positions when viewed from the side of the ship facing towards the centre line.

#### **Characteristics**

- 5.2.4.5** The D-value marking shall be white. The D-value marking shall be rounded to the nearest whole metre or foot with 0.5 rounded down.
- 5.2.4.6** The numbers of the marking shall have a colour contrasting with the background and shall be in the form and proportion shown in Figure 5-4 for a D-value with a dimension of more than 30 m. For a D-value with a dimension of between 15 m to 30 m the height of the numbers of the marking shall be a minimum of 90 cm, and for a D-value of less than 15 m the height of the numbers of the marking shall be a minimum of 60 cm, each with a proportional reduction in width and thickness.

### 5.2.5 Final approach and take-off area perimeter marking or markers for surface-level heliports

**Note:** The objective of final approach and take-off area perimeter marking, or markers, is to provide to the pilot, where the perimeter of the FATO is not self-evident, an indication of the area that is free of obstacles and in which intended procedures, or permitted manoeuvring, may take place.

#### **Application**

5.2.5.1 FATO perimeter marking or markers shall be provided at a surface-level heliport where the extent of a FATO with a solid surface is not self-evident.

#### **Location**

5.2.5.2 The FATO perimeter marking or markers shall be located on the edge of the FATO.

#### **Characteristics — Runway-type FATOs**

5.2.5.3 The perimeter of the FATO shall be defined with markings or markers spaced at equal intervals of not more than 50 m with at least three markings or markers on each side including a marking or marker at each corner.

5.2.5.4 A FATO perimeter marking shall be a rectangular stripe with a length of 9 m or one-fifth of the side of the FATO which it defines and a width of 1 m.

5.2.5.5 FATO perimeter markings shall be white.

5.2.5.6 A FATO perimeter marker shall have dimensional characteristics as shown in Figure 5-5.

5.2.5.7 FATO perimeter markers shall be of colour(s) that contrast effectively against the operating background.


5.2.5.8 FATO perimeter markers shall be a single colour, orange or red, or two contrasting colours, orange and white or, alternatively, red and white shall be used except where such colours would merge with the background.

#### **Characteristics — All FATOs except runway-type FATOs**

5.2.5.9 For an unpaved FATO the perimeter shall be defined with flush in-ground markers. The FATO perimeter markers shall be 30 cm in width, 1.5 m in length, and with end-to-end spacing of not less than 1.5 m and not more than 2 m. The corners of a square or rectangular FATO shall be defined.

5.2.5.10 For a paved FATO the perimeter shall be defined with a dashed line. The FATO perimeter marking segments shall be 30 cm in width, 1.5 m in length, and with end-to-end spacing of not less than 1.5 m and not more than 2 m. The corners of the square or rectangular FATO shall be defined.

5.2.5.11 FATO perimeter markings and flush in-ground markers shall be white.

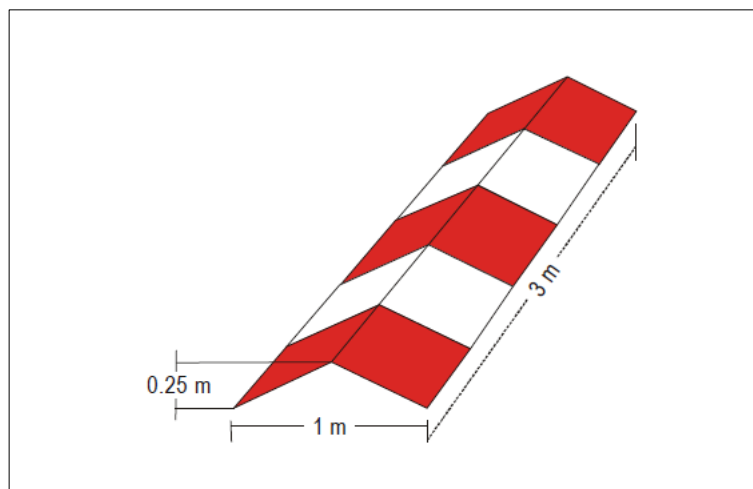

**Figure 5-6. Runway-type FATO edge marker**

## 5.2.6 Final approach and take-off area designation markings for runway-type FATOs

**Note:** The objective of final approach and take-off area designation markings for runway-type FATOs is to provide to the pilot an indication of the magnetic heading of the runway.

### **Application**

- 5.2.6.1** A FATO designation marking shall be provided at a heliport where it is necessary to designate the FATO to the pilot.

### **Location**

- 5.2.6.2** A FATO designation marking shall be located at the beginning of the FATO as shown in Figure 5-2.

### **Characteristics**

- 5.2.6.3** A FATO designation marking shall consist of a two-digit number. The two-digit number shall be the whole number nearest the one-tenth of the magnetic North when viewed from the direction of approach. When the above rule would give a single digit number, it shall be preceded by a zero. The marking as shown in Figure 5-2, shall be supplemented by the heliport identification marking.

### 5.2.7 Aiming point marking

**Note:** The objective of the aiming point marking is to provide a visual cue indicating to the pilot the preferred approach/departure direction; the point to which the helicopter approaches to the hover before positioning to a stand where a touchdown can be made; and that the surface of the FATO is not intended for touchdown.

#### **Application**

**5.2.7.1** An aiming point marking shall be provided at a heliport where it is necessary for a pilot to make an approach to a particular point above a FATO before proceeding to a TLOF.

#### **Location — Runway-type FATOs**

**5.2.7.2** The aiming point marking shall be located within the FATO.

#### **Location — All FATOs except runway-type FATOs**

**5.2.7.3** The aiming point marking shall be located at the centre of the FATO as shown in Figure 5-1.

#### **Characteristics**


**5.2.7.4** The aiming point marking shall be an equilateral triangle with the bisector of one of the angles aligned with the preferred approach direction. The marking shall consist of continuous lines providing a contrast with the background colour, and the dimensions of the marking shall conform to those shown in Figure 5-6.

### 5.2.8 TLOF perimeter marking

**Note:** The objective of the touchdown and lift-off area perimeter marking is to provide to the pilot an indication of an area that is free of obstacles; has dynamic load bearing; and in which, when positioned in accordance with the TDPM, undercarriage containment is assured.

#### **Application**

**5.2.8.1** A TLOF perimeter marking shall be displayed on a TLOF located in a FATO at a surface-level heliport if the perimeter of the TLOF is not self-evident if the perimeter of the TLOF is not self-evident.

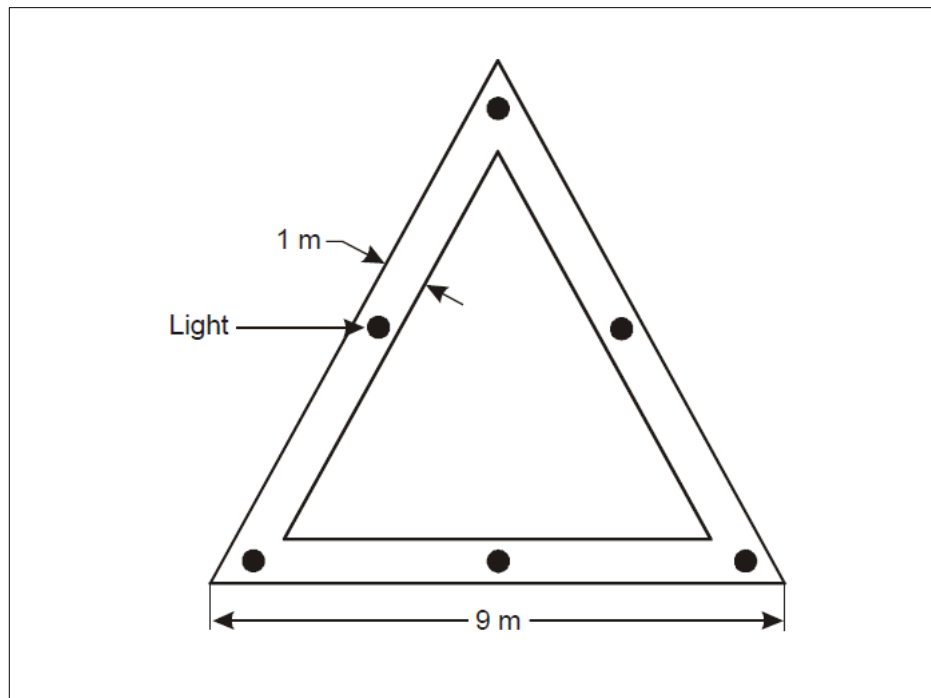

**Figure 5-7. Aiming point marking**

**5.2.8.2** A TLOF perimeter marking shall be displayed on an elevated heliport, a helideck and a shipboard heliport.

**Location**

**5.2.8.3** The TLOF perimeter marking shall be located along the edge of the TLOF.

**Characteristics**

**5.2.8.4** A TLOF perimeter marking shall consist of a continuous white line with a width of at least 30 cm.

**5.2.9 Touchdown/positioning marking**

**Note:** The objective of a touchdown/positioning marking (TDPM) is to provide visual cues which permit a helicopter to be placed in a specific position such that, when the pilot's seat is above the marking, the undercarriage is within the load-bearing area and all parts of the helicopter will be clear of any obstacles by a safe margin.

**Application**

**5.2.9.1** A touchdown/positioning marking shall be provided for a helicopter to touch down or be accurately placed in a specific position.

**5.2.9.2** The touchdown/positioning marking shall be:

- a) when there is no limitation on the direction of touchdown/positioning, a touchdown/positioning circle (TDPC) marking; and

- b) when there is a limitation on the direction of touchdown/positioning:
  - 1) for unidirectional applications, a shoulder line with an associated centreline; or
  - 2) for multidirectional applications, a TDPC marking with prohibited landing sector(s) marked.


## Location

- 5.2.9.3 The inner edge/inner circumference of the touchdown/positioning marking shall be at a distance of 0.25 D from the centre of the area in which the helicopter is to be positioned.
- 5.2.9.4 On a helideck, the centre of the TDPC marking shall be located at the centre of the FATO, except that the marking may be offset away from the origin of the obstacle-free sector by no more than 0.1 D where an aeronautical study indicates such offsetting is necessary and would not impair safety.
- 5.2.9.5 Prohibited landing sector markings, when provided, shall be located on the touchdown/positioning marking, within the relevant headings, and extend to the inner edge of the TLOF perimeter marking.

## Characteristics

- 5.2.9.6 The inner diameter of the TDPC shall be 0.5 D of the largest helicopter the area is intended to serve.
- 5.2.9.7 A touchdown/positioning marking shall have a line width of at least 0.5 m. For a helideck and a purpose-built shipboard heliport, the line width shall be at least 1 m.
- 5.2.9.8 The length of a shoulder line shall be 0.5D of the largest helicopter the area is intended to serve.
- 5.2.9.9 The prohibited landing sector markings, when provided, shall be indicated by white and red hatched markings as shown in Figure 5-7.
- 5.2.9.10 The TDPM shall take precedent when used in conjunction with other markings on the TLOF except for the prohibited landing sector marking.

**Note:** The prohibited landing sector (PLS) marking, when provided, is not intended to move the helicopter away from objects around the FATO, but to ensure that the tail is not placed in an orientation that might constitute a hazard. This is achieved by having the helicopter nose clear of the hatched markings during the touchdown.

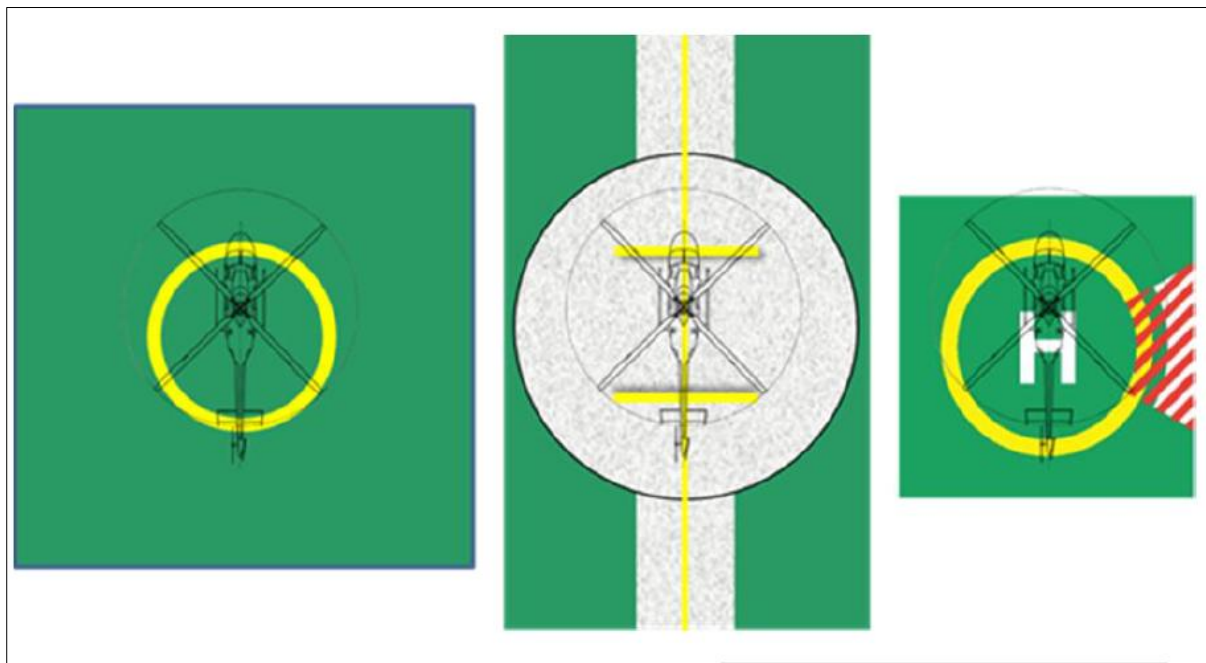

**Figure 5-8. Multidirectional TDPC with no limitations (Left)  
Unidirectional marking shoulder line with associated centreline (Centre)  
Multidirectional TDPC with prohibited landing sector marking (Right)**

### 5.2.10 Heliport name marking

**Note:** The objective of a heliport name marking is to provide to the pilot a means of identifying a heliport which can be seen, and read, from all directions of approach.

#### *Application*

**5.2.10.1** A heliport name marking shall be provided at a heliport and helideck where there is insufficient alternative means of visual identification.

#### *Location*

**5.2.10.2** Where a limited obstacle sector (LOS) exists on a helideck the marking shall be located on the that side of the “heliport identification marking”. For a non-purpose-built heliport located on a ship’s side the marking shall be located on the inboard side of the heliport identification marking in the area between the TLOF perimeter marking and the boundary of the LOS.

#### *Characteristics*

**5.2.10.3** A heliport name marking shall consist of the name or the alphanumeric designator of the heliport as used in the radio (R/T) communications.

**5.2.10.4** A heliport name marking intended for use at night or during conditions of poor visibility shall be illuminated, either internally or externally.

### Runway-type FATOs

**5.2.10.5** The characters of the marking shall be not less than 3 m in height. All FATOs except runway-type FATOs.

**5.2.10.6** The characters of the marking shall be not less than 1.5 m in height at surface-level heliports and not less than 1.2 m on elevated heliports, helidecks and shipboard heliports. The colour of the marking shall contrast with the background and preferably be white.

### 5.2.11 Helideck obstacle-free sector (chevron) marking

**Note:** *The objective of the helideck obstacle-free sector (chevron) marking is to indicate the direction and limits of a sector that is free of obstacles above the level of the helideck for the preferred approach and departure directions.*

#### Application

**5.2.11.1** A helideck with adjacent obstacles that penetrate above the level of the helideck shall have an obstacle-free sector marking.

#### Location

**5.2.11.2** A helideck obstacle-free sector marking shall be located, where practicable, at a distance from the centre of the TLOF equal to the radius of the largest circle that can be drawn in the TLOF or 0.5 D, whichever is greater.

**Note:** *Where the Point of Origin is outside the TLOF, and it is not practicable to physically paint the chevron, the chevron is relocated to the TLOF perimeter on the bisector of the OFS. In this case the distance and direction of displacement, along with the attention getting "WARNING DISPLACED CHEVRON", with the distance and direction of displacement, is marked in a box beneath the chevron in black characters not less than 10 cm high — an example Figure is given in the Heliport Manual (Doc 9261).*

#### Characteristics

**5.2.11.3** The helideck obstacle-free sector marking shall indicate the location of the obstacle-free sector and the directions of the limits of the sector.

**Note:** *Example figures are given in the Heliport Manual (Doc 9261).*

**5.2.11.4** The height of the chevron shall not be less than 30 cm.

**5.2.11.5** The chevron shall be marked in a conspicuous colour.

**5.2.11.6** The colour of the chevron shall be black.

### 5.2.12 Helideck and shipboard heliport surface marking

**Note:** *The objective of the helideck and shipboard heliport surface marking is to provide, by colour and conspicuity, the location of the TLOF on a helideck or shipboard heliport.*

**Application**

**5.2.12.1** A surface marking shall be provided to assist the pilot to identify the location of the helideck or shipboard heliport during an approach by day.

**Location**

**5.2.12.2** A surface marking shall be applied to the dynamic load bearing area bounded by the TLOF perimeter marking.

**Characteristics**

**5.2.12.3** The helideck or shipboard heliport surface bounded by the TLOF perimeter marking shall be of dark green using a high friction coating.

**Note:** Where the application of a surface coating may have a degrading effect on friction qualities the surface might not be painted. In such cases the best operating practice to enhance the conspicuity of markings is to outline deck markings with a contrasting colour.

**5.2.13 Helicopter ground taxiway markings and markers**

**Note 1:** The objective of helicopter taxiway markings and markers is, without being a hazard to the helicopter, to provide to the pilot by day and, if necessary, by night, visual cues to guide movement along the taxiway.

**Note 2:** The specifications for taxi-holding position markings in CAR 139, PART 1, 5.2.10 are equally applicable to taxiways intended for ground taxiing of helicopters.

**Note 3:** Ground Taxi-routes are not required to be marked

**Note 4:** Unless otherwise indicated it may be assumed that a helicopter taxiway is suitable for both ground taxiing and air taxiing of helicopters.

**Note 5:** Signage may be required on an aerodrome where it is necessary to indicate that a helicopter taxiway is suitable only for the use of helicopters.

**Application**

**5.2.13.1** The centre line of a helicopter taxiway shall be identified with a marking.

**5.2.13.2** The edges of a helicopter taxiway, if not self-evident, shall be identified with markers or markings.

**Location**

**5.2.13.3** Helicopter taxiway markings shall be along the centre line and, if required, along the edges of a helicopter taxiway.

**5.2.13.4** Helicopter taxiway edge markers shall be located at a distance of 1 m to 3 m beyond the edge of the helicopter ground taxiway.

**5.2.13.5** Helicopter ground taxiway edge markers shall be spaced at intervals of not more than 15 m on each side of straight sections and 7.5 m on each side of curved sections with a minimum of four equally spaced markers per section.

**Characteristics**

**5.2.13.6** On a paved taxiway, a helicopter taxiway centre line marking shall be a continuous yellow line 15 cm in width.

**5.2.13.7** On an unpaved taxiway that will not accommodate painted markings, a helicopter taxiway centre line shall be marked with flush in-ground 15 cm wide and approximately 1.5 m in length yellow markers, spaced at intervals of not more than 30 m on straight sections and not more than 15 m on curves, with a minimum of four equally spaced markers per section.

**5.2.13.8** Helicopter taxiway edge markings shall be a continuous double yellow line, each 15 cm in width, and spaced 15 cm apart (nearest edge to nearest edge).

**5.2.13.9** A helicopter taxiway edge marker shall be frangible.

**5.2.13.10** A helicopter taxiway edge marker shall not exceed a plane originating at a height of 25 cm above the plane of the helicopter taxiway, at a distance of 0.5 m from the edge of the helicopter taxiway and sloping upwards and outwards at a gradient of 5 per cent to a distance of 3 m beyond the edge of the helicopter taxiway.

**5.2.13.11** A helicopter taxiway edge marker shall be blue.

**Note 1:** *Guidance on suitable edge markers is given in the Heliport Manual (Doc 9261).*

**Note 2:** *If blue markers are used on an aerodrome, signage may be required to indicate that the helicopter taxiway is suitable only for helicopters.*

**5.2.13.12** If the helicopter taxiway is to be used at night, the edge markers shall be internally illuminated or retro-reflective.

**5.2.14 Helicopter taxi-route markings and markers**

**Note:** *The objective of helicopter air taxi-route markings and markers is to provide to the pilot by day and, if necessary, by night, visual cues to guide movement along the air taxi-route.*

**Application**

**5.2.14.1** The centre line of a helicopter air taxi-route shall be identified with markers or markings.

**Location**

**5.2.14.2** A helicopter taxi-route centre line marking or markers shall be located along the centre line of the helicopter air taxiway.

**Characteristics**

**5.2.14.3** A helicopter air taxi-route centre line, when on a paved surface, shall be marked with a continuous yellow line 15 cm in width.

**5.2.14.4** A helicopter air taxi-route centre line, that will not accommodate painted markings, shall be marked with markers, spaced at intervals of not more than 30 m on straight sections and not more than 15 m on curves, with a minimum of four equally spaced markers per section.

**Note:** Further guidance on the characteristics of markers is provided in the Heliport Manual (Doc 9261).

**5.2.14.5** If the helicopter air taxi-route is to be used at night, markers shall be either internally illuminated or retro-reflective.

### **5.2.15 Helicopter stand markings**

**Note:** The objective of the helicopter stand markings is to provide to the pilot a visual indication of an area that is free of obstacles and in which permitted manoeuvring, and all necessary ground functions, may take place; identification, mass and D-value limitations, when required; and, guidance for manoeuvring and positioning of the helicopter within the stand.

#### **Application**

**5.2.15.1** A helicopter stand perimeter marking shall be provided.

**5.2.15.2** A helicopter stand shall be provided with the appropriate TDPM. See Figure 5-7 in section 5.2.9.

**5.2.15.3** Alignment lines and lead-in/lead-out lines shall be provided on a helicopter stand.

**Note 1:** See Figure 3.5 to 3.9 of Chapter 3.


**Note 2:** Helicopter stand identification markings may be provided where there is a need to identify individual stands.

**Note 3:** Additional markings relating to stand size may be provided. See the Heliport Manual (Doc 9261).

#### **Location**

**5.2.15.4** The TDPM, alignment lines and lead-in/lead-out lines shall be located such that every part of the helicopter can be contained within the helicopter stand during positioning and permitted manoeuvring.

**5.2.15.5** Alignment lines and lead-in/lead-out lines shall be located as shown in Figure 5-8.

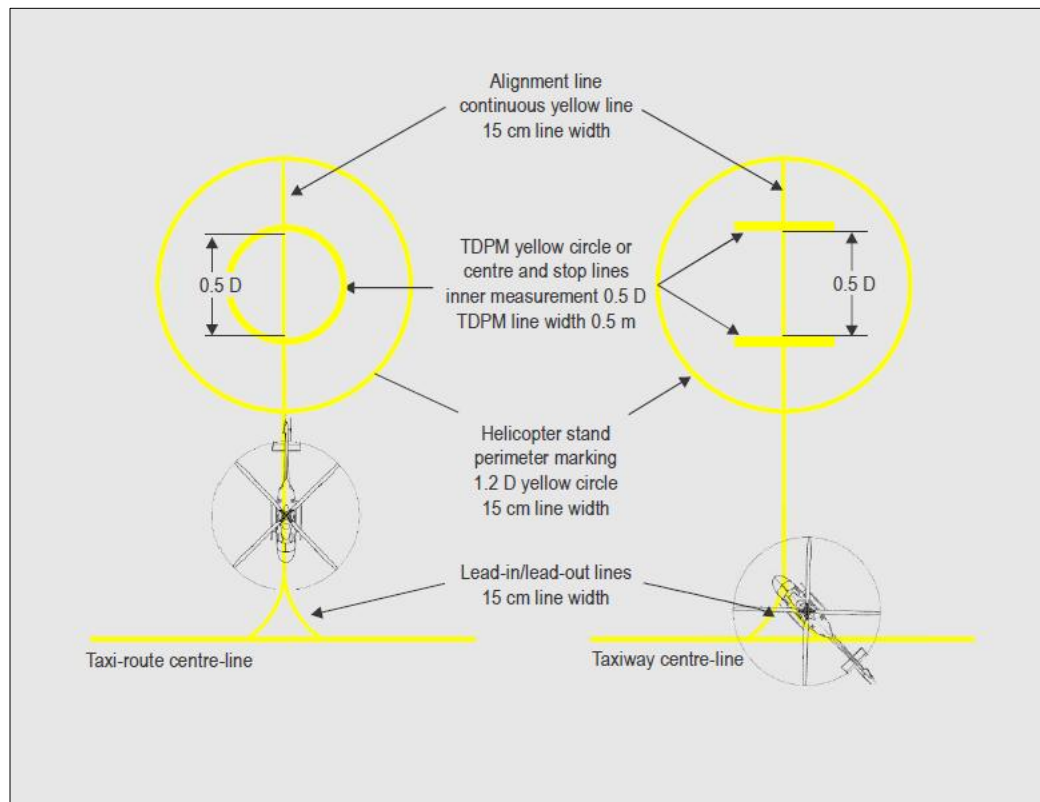

**Figure 5-9. Helicopter stand markings**

### **Characteristics**

- 5.2.15.6** A helicopter stand perimeter marking shall consist of a continuous a yellow line and have a line width of 15 cm.
- 5.2.15.7** The TDPM shall have the characteristics described in Section 5.2.9 above.
- 5.2.15.8** Alignment lines and lead-in/lead-out lines shall be continuous yellow lines and have a width of 15 cm.
- 5.2.15.9** Curved portions of alignment lines and lead-in/lead-out lines shall have radii appropriate to the most demanding helicopter type the helicopter stand is intended to serve.
- 5.2.15.10** Stand identification markings shall be marked in a contrasting colour so as to be easily readable.

**Note 1:** Where it is intended that helicopters proceed in one direction only, arrows indicating the direction to be followed may be added as part of the alignment lines.

**Note 2:** The characteristics of markings related to the stand size and alignment and lead-in/lead-out lines are illustrated in Figure 5-8. – examples of stands and their markings can be seen in Figures 3.5 to 3.9 of Chapter 3.

### **5.2.16 Flight path alignment guidance marking**

**Note:** The objective of a flight path alignment guidance marking is to provide the pilot with a visual indication of the available approach and/or departure path direction(s)

### **Application**

**5.2.16.1** Flight path alignment guidance marking(s) shall be provided at a heliport where it is desirable and practicable to indicate available approach and/or departure path direction(s).

**Note:** The flight path alignment guidance marking can be combined with a flight path alignment guidance lighting system described in 5.3.4.

### **Location**


**5.2.16.2** The flight path alignment guidance marking shall be located in a straight line along the direction of approach and/or departure path on one or more of the TLOF, FATO, safety area or any suitable surface in the immediate vicinity of the FATO or safety area.

### **Characteristics**

**5.2.16.3** A flight path alignment guidance marking shall consist of one or more arrows marked on the TLOF, FATO and/or safety area surface as shown in Figure 5-9. The stroke of the arrow(s) shall be 50 cm in width and at least 3 m in length. When combined with a flight path alignment guidance lighting system it shall take the form shown in Figure 5-9 which includes the scheme for marking 'heads of the arrows' which are constant regardless of stroke length.

**Note:** In the case of a flight path limited to a single approach direction or single departure direction, the arrow marking may be unidirectional. In the case of a heliport with only a single approach/departure path available, one bidirectional arrow is marked.

**5.2.16.4** The markings shall be in a colour which provides good contrast against the background colour of the surface on which they are marked, preferably white.

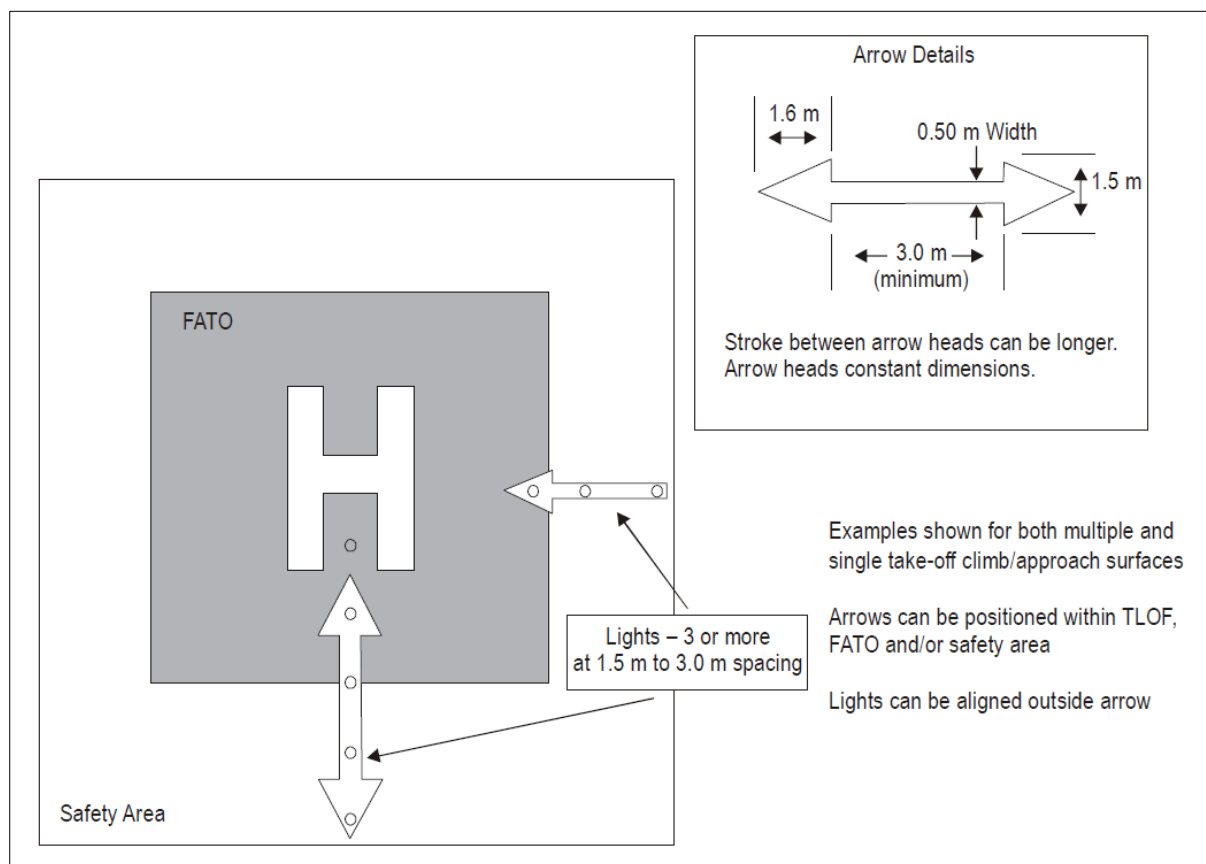

**Figure 5-10. Flight path alignment guidance markings and lights**

### 5.3 Lights

#### 5.3.1 General

**Note 1:** See CAR 139 Part 1, 5.3.1, concerning specifications on screening of non-aeronautical ground lights, and design of elevated and inset lights.

**Note 2:** In the case of helidecks and heliports located near navigable waters, consideration needs to be given to ensuring that aeronautical ground lights do not cause confusion to mariners.

**Note 3:** As helicopters will generally come very close to extraneous light sources, it is particularly important to ensure that, unless such lights are navigation lights exhibited in accordance with international regulations, they are screened or located so as to avoid direct and reflected glare.

**Note 4:** Systems addressed in sections 5.3.4, 5.3.6, 5.3.7, and 5.3.8 are designed to provide effective lighting cues based on night conditions. Where lights are to be used in conditions other than night (i.e. day or twilight) it may be necessary to increase the intensity of the lighting to maintain effective visual cues by use of a suitable brilliancy control. Guidance is provided in the Aerodrome Design Manual (Doc 9157), Part 4 — Visual Aids.

**Note 5:** The specifications for marking and lighting of obstacles included in CAR 139 Part 1, Chapter 6, are equally applicable to heliports and winching areas.

**Note 6:** In cases where operations into a heliport are to be conducted at night with Night Vision Imaging Systems (NVIS), it is important to ensure all heliport lighting are compatible with the NVIS such as through the addition of infrared emitters to the heliport lighting. Where such additional measures are not practicable, helicopter operators using NVIS are to be made aware of it.

### 5.3.2 Heliport beacon

**Note:** The objective of a heliport beacon is to make a heliport more conspicuous to assist the pilot to locate and identify the heliport at night and/or by day in reduced visibility.

#### Application

5.3.2.1 A heliport beacon shall be provided at a heliport where:

- a) long-range visual guidance is considered necessary and is not provided by other visual means; or
- b) identification of the heliport is difficult due to surrounding lights.

#### Location


5.3.2.2 The heliport beacon shall be located on or adjacent to the heliport preferably at an elevated position and so that it does not dazzle a pilot at short range.

**Note:** Where a heliport beacon is likely to dazzle pilots at short range, it may be switched off during the final stages of the approach and landing.

#### Characteristics

5.3.2.3 The heliport beacon shall emit repeated series of equispaced short duration white flashes in the format in Figure 5-11.

5.3.2.4 The light from the beacon shall show at all angles of azimuth.

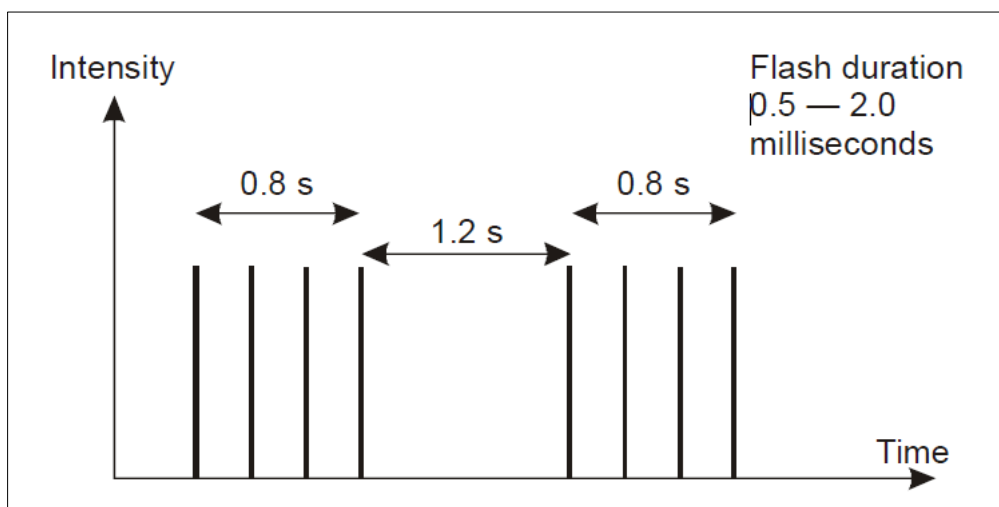

**Figure 5-11. Heliport beacon flash characteristics**

**5.3.2.5** The effective light intensity distribution of each flash shall be as shown in Figure 5-11, Illustration 1.

**Note:** Where brilliancy control is desired, settings of 10 per cent and 3 per cent have been found to be satisfactory. In addition, shielding may be necessary to ensure that pilots are not dazzled during the final stages of the approach and landing.


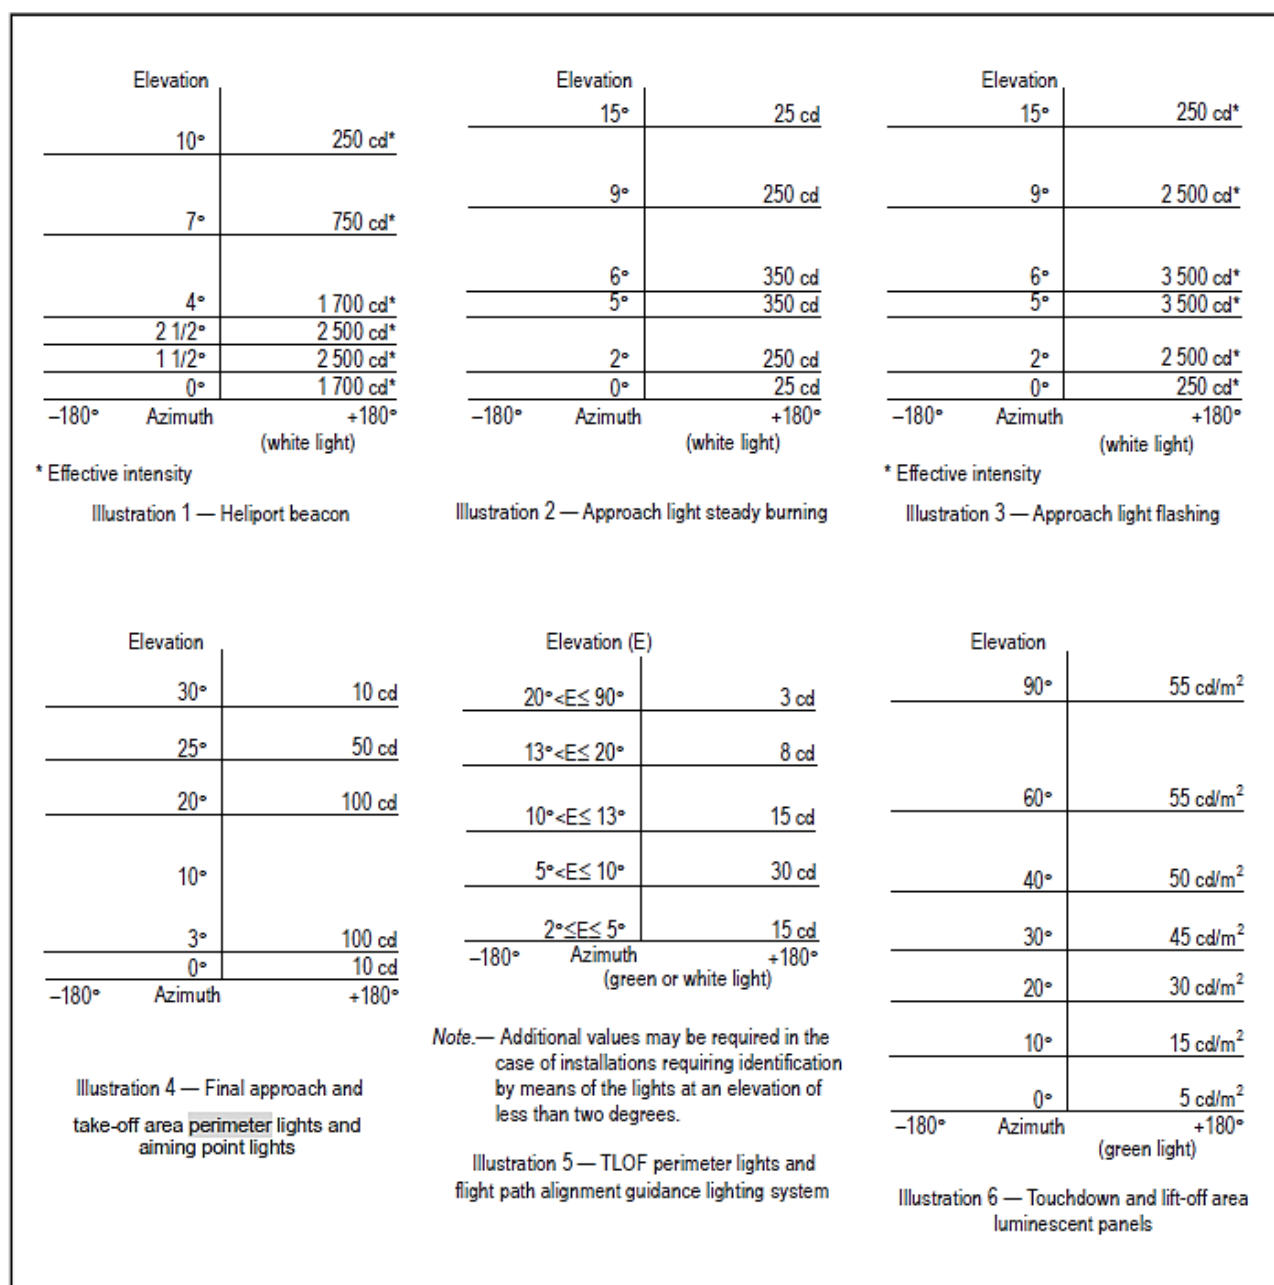


Figure 5-12. Isocandela diagrams

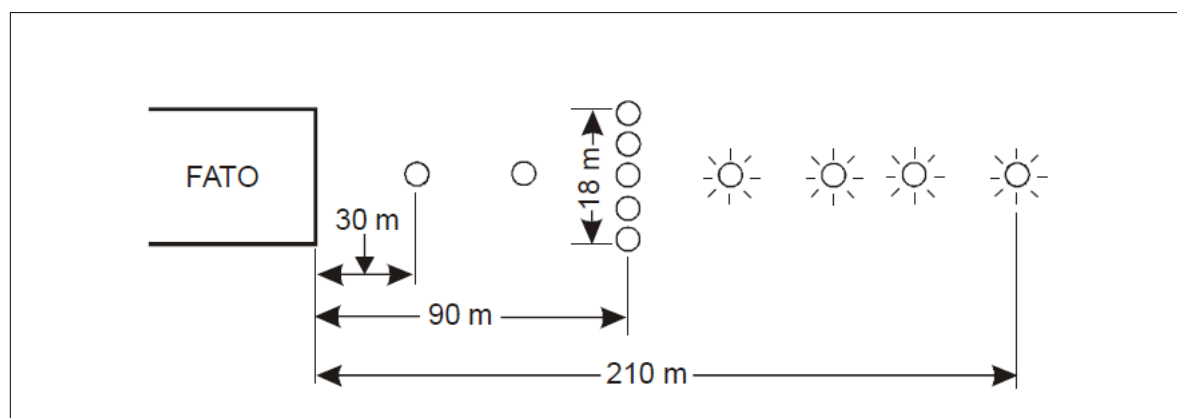

**Figure 5-13. Approach lighting system**

### 5.3.3 Approach lighting system

**Note:** The objective of an approach lighting system is to allow the helicopter operator, by day and night, to visually identify the heliport and align the helicopter on the centreline of the FATO upon arriving at a prescribed point on the approach flight path.

#### **Application**

**5.3.3.1** An approach lighting system shall be provided at a heliport where it is desirable and practicable to indicate a preferred approach direction.

#### **Location**

**5.3.3.2** The approach lighting system shall be located in a straight line along the preferred direction of approach.

#### **Characteristics**

**5.3.3.3** An approach lighting system shall consist of a row of three lights spaced uniformly at 30 m intervals and of a crossbar 18 m in length at a distance of 90 m from the perimeter of the FATO as shown in Figure 5-12. The lights forming the crossbar shall be as nearly as practicable in a horizontal straight line at right angles to, and bisected by, the line of the centre line lights and spaced at 4.5 m intervals. Where there is the need to make the final approach course more conspicuous, additional lights spaced uniformly at 30 m intervals shall be added beyond the crossbar. The lights beyond the crossbar may be steady or sequenced flashing, depending upon the environment.

**Note:** Sequenced flashing lights may be useful where identification of the approach lighting system is difficult due to surrounding lights.

**5.3.3.4** The steady lights shall be omnidirectional white lights.

**5.3.3.5** Sequenced flashing lights shall be omnidirectional white lights.

**5.3.3.6** The flashing lights shall have a flash frequency of one per second and their light distribution shall be as shown in Figure 5-11, Illustration 3. The flash sequence shall commence from the outermost light and progress towards the crossbar.

**5.3.3.7** A suitable brilliancy control shall be incorporated to allow for adjustment of light intensity to meet the prevailing conditions.

**Note:** *The following intensity settings have been found suitable:*

- a. steady lights — 100 per cent, 30 per cent and 10 per cent; and
- b. flashing lights — 100 per cent, 10 per cent and 3 per cent.

#### **5.3.4 Flight path alignment guidance lighting system**

**Note:** *The objective of a flight path alignment guidance lighting system is to indicate, by day, night, and in reduced visibility, available approach and/or departure flight path direction(s).*

##### **Application**

**5.3.4.1** Flight path alignment guidance lighting system(s) shall be provided at a heliport where it is desirable and practicable to indicate available approach and/or departure path direction(s).

**Note:** *The flight path alignment guidance lighting can be combined with a flight path alignment guidance marking(s) described in 5.2.18.*

##### **Location**

**5.3.4.2** The flight path alignment guidance lighting system shall be in a straight line along the direction(s) of approach and/or departure path on one or more of the TLOF, FATO, safety area or any suitable surface in the immediate vicinity of the FATO, TLOF or safety area.

**5.3.4.3** If combined with a flight path alignment guidance marking, as far as is practicable the lights shall be located inside the “arrow” markings.

##### **Characteristics**

**5.3.4.4** A flight path alignment guidance lighting system shall consist of a row of three or more lights spaced uniformly a total minimum distance of 6 m. Intervals between lights shall not be less than 1.5 m and shall not exceed 3 m. Where space permits there shall be 5 lights. (See Figure 5-9.)

**Note:** *The number of lights and spacing between these lights may be adjusted to reflect the space available. If more than one flight path alignment system is used to indicate available approach and/or departure path direction(s), the characteristics for each system are typically kept the same. (See Figure 5-9.)*

**5.3.4.5** The lights shall be steady omnidirectional inset white lights.

**5.3.4.6** The distribution of the lights shall be as indicated in Figure 5-11, Illustration 6.

- 5.3.4.7** A suitable control shall be incorporated to allow for adjustment of light intensity to meet the prevailing conditions and to balance the flight path alignment guidance lighting system with other heliport lights and general lighting that may be present around the heliport.

### **5.3.5 Visual alignment guidance system**

**Note:** *The objective of a visual alignment guidance system is to provide conspicuous and discrete cues to assist the pilot to attain, and maintain, a specified approach track to a heliport. Guidance on suitable visual alignment guidance systems is given in the Heliport Manual (Doc 9261).*

#### **Application**

- 5.3.5.1** A visual alignment guidance system shall be provided to serve the approach to a heliport where one or more of the following conditions exist especially at night:
- obstacle clearance, noise abatement or traffic control procedures require a particular direction to be flown;
  - the environment of the heliport provides few visual surface cues; and
  - it is physically impracticable to install an approach lighting system.

### **5.3.6 Visual approach slope indicator**

**Note:** *The objective of a visual approach slope indicator is to provide conspicuous and discrete colour cues within a specified elevation and azimuth, to assist the pilot to attain and maintain the approach slope to a desired position within a FATO. Guidance on suitable visual approach slope indicators is given in the Heliport Manual (Doc 9261).*

#### **Application**

- 5.3.6.1** A visual approach slope indicator shall be provided to serve the approach to a heliport, whether or not the heliport is served by other visual approach aids or by non-visual aids, where one or more of the following conditions exist especially at night:
- obstacle clearance, noise abatement or traffic control procedures require a particular slope to be flown;
  - the environment of the heliport provides few visual surface cues; and
  - the characteristics of the helicopter require a stabilized approach.

### **5.3.7 FATO perimeter lights for onshore surface-level heliports**

**Note:** The objective of FATO perimeter lights for onshore surface-level heliports is to provide to the pilot operating at night an indication of the shape, location and extent of the FATO.

### **Application**

**5.3.7.1** Where a FATO with a solid surface is established at a surface-level heliport intended for use at night, FATO perimeter lights shall be provided except that they may be omitted where the FATO and the TLOF are nearly coincidental or the extent of the FATO is self-evident.

### **Location**

**5.3.7.2** FATO lights shall be placed along the edges of the FATO. The lights shall be uniformly spaced as follows:

- a) for an area in the form of a square or rectangle, at intervals of not more than 50 m with a minimum of four lights on each side including a light at each corner; and
- b) for any other shaped area, including a circular area, at intervals of not more than 5 m with a minimum of ten lights.

### **Characteristics**

**5.3.7.3** FATO perimeter lights shall be fixed omnidirectional lights showing green or white with variable intensity. Green perimeter lights shall be permitted only when the FATO is a dynamic load-bearing surface.

**5.3.7.4** The light distribution of FATO perimeter lights shall be as shown in Figure 5-11, Illustration.

**5.3.7.5** The lights shall not exceed a height of 25 cm and shall be inset when a light extending above the surface would endanger helicopter operations. Where a FATO is not meant for lift-off or touchdown, the lights shall not exceed a height of 25 cm above ground or snow level.

### **5.3.8 Aiming point lights**

**Note:** The objective of aiming point lights is to provide a visual cue indicating to the pilot by night the preferred approach/departure direction; the point to which the helicopter approaches to a hover before positioning to a TLOF, where a touchdown can be made; and that the surface of the FATO is not intended for touchdown.

### **Application**

**5.3.8.1** Where an aiming point marking is provided at a heliport intended for use at night, aiming point lights shall be provided.

### **Location**

**5.3.8.2** Aiming point lights shall be collocated with the aiming point marking.

## Characteristics

- 5.3.8.3** Aiming point lights shall form a pattern of at least six omnidirectional white lights as shown in Figure 5-7. The lights shall be arranged equidistantly with a light at the apex and at both corners. The lights shall be inset when a light extending above the surface could endanger helicopter operations.
- 5.3.8.4** The light distribution of aiming point lights shall be as shown in Figure 5-11, Illustration.

## 5.3.9 Touchdown and lift-off area lighting system

**Note:** The objective of a touchdown and lift-off area lighting system is to provide illumination of the TLOF and required elements within. For a TLOF located in a FATO, the objective is to provide discernibility, to the pilot on a final approach, of the TLOF and required elements within; while for a TLOF located on an elevated heliport, shipboard heliport or helideck, the objective is visual acquisition from a defined range and to provide sufficient shape cues to permit an appropriate approach angle to be established.

## Application

- 5.3.9.1** A TLOF lighting system shall be provided at a heliport intended for use at night.

**Note:** Where a TLOF is located in a stand, the objective may be met with the use of ambient lighting or stand floodlighting (see 5.3.10).

- 5.3.9.2** For a surface-level heliport, lighting for the TLOF in a FATO shall consist of either one or more of the following:
- a) perimeter lights;
  - b) arrays of segmented point source lighting (ASPSL) or luminescent panel (LP) lighting to identify the TLOF perimeter when a) is not practicable and FATO perimeter lights are available.
- 5.3.9.3** For an elevated heliport, shipboard heliport or helideck, lighting of the TLOF in a FATO shall consist of:
- a) perimeter lights; and
  - b) ASPSL and/or LPs to identify the TDPC and/or floodlighting to illuminate the TLOF.
- 5.3.9.4** When enhanced surface texture cues are required at a TLOF ASPSL and/or LPs to identify the TDPC marking and/ or floodlighting shall be provided at a surface-level heliport intended for use at night.

## Location

- 5.3.9.5** TLOF perimeter lights shall be placed along the edge of the area designated for use as the TLOF or within a distance of 1.5 m from the outer edge. TLOF perimeter lights shall be uniformly spaced at intervals of not more than 3 m for elevated heliports, helidecks and shipboard heliports and not more than 5 m for surface-level heliports.

**Note:** Where the TLOF is circular, drift of the helicopter may be difficult to discern by the pilot. Guidance on lighting patterns to counter drift displacement over the TLOF is contained in the Heliport Manual (Doc 9261).

- 5.3.9.6** The TLOF perimeter lights shall be installed at an elevated heliport or fixed helideck such that the pattern cannot be seen by the pilot from below the elevation of the TLOF.
- 5.3.9.7** The TLOF perimeter lights shall be installed on a moving helideck or shipboard heliport, such that the pattern cannot be seen by the pilot from below the elevation of the TLOF when the helideck or shipboard heliport is level.
- 5.3.9.8** On surface-level heliports, ASPSL or LPs, if provided to identify the TLOF, shall be placed along the marking designating the edge of the TLOF. Where the TLOF is a circle, they shall be located on straight lines circumscribing the area.
- 5.3.9.9** TLOF floodlights where provided shall be arranged so as to avoid glare to pilots in flight or to personnel working on the area.

**Note:** Detailed specifications on the number of lights to be provided, based on the shape and size of the TLOF are contained in the Heliport Manual (Doc 9261).

### **Characteristics**

- 5.3.9.10** The TLOF perimeter lights shall be fixed omnidirectional lights showing green.
- 5.3.9.11** At a surface-level heliport, ASPSL or LPs shall emit green light when used to define the perimeter of the TLOF.
- 5.3.9.12** The chromaticity and luminance of colours of LPs shall conform to CAR139 PART1, Appendix 1, 3.4.
- 5.3.9.13** An LP shall have a minimum width of 6 cm. The panel housing shall be the same colour as the marking it defines.
- 5.3.9.14** For a surface level or elevated heliport, the TLOF perimeter lights located in a FATO shall not exceed a height of 5 cm and shall be inset when a light extending above the surface could endanger helicopter operations.
- 5.3.9.15** For a helideck or shipboard heliport, the TLOF perimeter lights shall not exceed a height of 5 cm, or for a FATO/TLOF, 15 cm.
- 5.3.9.16** When located within the safety area of a surface level or elevated heliport, the TLOF floodlights shall not exceed a height of 25 cm.
- 5.3.9.17** For a helideck or shipboard heliport, the TLOF floodlights shall not exceed a height of 5 cm, or for a FATO/TLOF, 15 cm.
- 5.3.9.18** The ASPSL and LPs shall not extend above the surface by more than 2.5 cm.

**Note:** Guidance on panel profiles and loading limitations is contained in the Heliport Manual (Doc 9261).

**5.3.9.19** The light distribution of the perimeter lights shall be as shown in Figure 5-11, Illustration 5.

**Note:** The light distribution of the ASPSL and/or LPs used to illuminate the TDPC and heliport identification marking, or cross (chevron) markings at a hospital, are detailed in the Heliport Manual (Doc 9261).

**5.3.9.20** The spectral distribution of TLOF area floodlights shall be such that the surface and obstacle marking can be correctly identified.

**5.3.9.21** If utilized, the heliport identification marking lighting, or cross marking lighting at a hospital, shall be omnidirectional showing green.

### **5.3.10 Helicopter stand floodlighting**

**Note:** The objective of helicopter stand floodlighting is to provide illumination of the stand surface and associated markings to assist the manoeuvring and positioning of a helicopter and facilitation of essential operations around the helicopter.

#### **Application**

**5.3.10.1** Floodlighting shall be provided on a helicopter stand intended to be used at night.

**Note:** Guidance on stand floodlighting is given in the apron floodlighting section in the Aerodrome Design Manual (Doc 9157), Part 4.

#### **Location**

**5.3.10.2** Helicopter stand floodlights shall be located so as to provide adequate illumination, with a minimum of glare to the pilot of a helicopter in flight and on the ground, and to personnel on the stand. The arrangement and aiming of floodlights shall be such that a helicopter stand receives light from two or more directions to minimize shadows.

#### **Characteristics**

**5.3.10.3** The spectral distribution of stand floodlights shall be such that the colours used for surface and obstacle marking can be correctly identified.

**5.3.10.4** Horizontal and vertical illuminance shall be sufficient to ensure that visual cues are discernible for required manoeuvring and positioning, and essential operations around the helicopter can be performed expeditiously without endangering personnel or equipment.

### 5.3.11 Winching area floodlighting

**Note:** The objective of winching area floodlighting is to provide illumination of the surface, obstacles and visual cues to assist a helicopter to be positioned over, and retained within, an area from which a passenger or equipment can be lowered or raised.

#### **Application**

5.3.11.1 Winching area floodlighting shall be provided at a winching area intended for use at night.

#### **Location**

5.3.11.2 Winching area floodlights shall be located so as to avoid glare to pilots in flight or to personnel working on the area. The arrangement and aiming of floodlights shall be such that shadows are kept to a minimum.

#### **Characteristics**

5.3.11.3 The spectral distribution of winching area floodlights shall be such that the surface and obstacle markings can be correctly identified.

5.3.11.4 The average horizontal illuminance shall be at least 10 lux, measured on the surface of the winching area.

### 5.3.12 Taxiway lights

**Note:** The specifications for taxiway centre line lights and taxiway edge lights in CAR 139, PART 1, 5.3.16 and 5.3.17, are equally applicable to taxiways intended for ground taxiing of helicopters.

### 5.3.13 Visual aids for denoting obstacles outside and below the obstacle limitation surfaces

**Note:** Arrangements for an aeronautical study of objects outside the obstacle limitation surface (OLS) and for other objects are addressed in CAR 139, PART1, Chapter 4.

5.3.13.1 Where an aeronautical study indicates that obstacles in areas outside and below the boundaries of the OLS, established for a heliport, constitute a hazard to helicopters, they shall be marked and lit, except that the marking may be omitted when the obstacle is lighted with high-intensity obstacle lights by day.

5.3.13.2 Where an aeronautical study indicates that overhead wires or cables crossing a river, waterway, valley or highway constitute a hazard to helicopters, they shall be marked, and their supporting towers marked and lit.

### 5.3.14 Floodlighting of obstacles

**Note:** *The objective of obstacle floodlighting is to highlight the shape and location of obstacles in the vicinity of the heliport, to assist a pilot flying at night to avoid all obstacles by a safe margin.*

#### ***Application***

**5.3.14.1** At a heliport intended for use at night, obstacles shall be floodlighted if it is not possible to display obstacle lights on them.

#### ***Location***

**5.3.14.2** Obstacle floodlights shall be arranged so as to illuminate the entire obstacle and as far as practicable in a manner so as not to dazzle the helicopter pilots.

#### ***Characteristics***

**5.3.14.3** Obstacle floodlighting shall be such as to produce a luminance of at least 10 cd/m<sup>2</sup>.

## CHAPTER 6. HELIPORT EMERGENCY RESPONSE

### 6.1 Heliport emergency planning

#### General

**Introductory Note:** *Heliport emergency planning is the process of preparing a heliport to cope with an emergency that takes place at the heliport or in its vicinity. Examples of emergencies include crashes on or off the heliport, medical emergencies, dangerous goods occurrences, fires and natural disasters. The purpose of heliport emergency planning is to minimize the impact of an emergency by saving lives and maintaining helicopter operations. The heliport emergency plan sets out the procedures for coordinating the response of heliport agencies or services (air traffic services unit, firefighting services, heliport administration, medical and ambulance services, aircraft operators, security services and police) and the response of agencies in the surrounding community (fire departments, police, medical and ambulance services, hospitals, military, and harbour patrol or coast guard) that could be of assistance in responding to the emergency.*

- 6.1.1 A heliport emergency plan shall be established commensurate with the helicopter operations and other activities conducted at the heliport.
- 6.1.2 The plan shall identify agencies which could be of assistance in responding to an emergency at the heliport or in its vicinity.
- 6.1.3 The heliport emergency plan shall provide for the coordination of the actions to be taken in the event of an emergency occurring at a heliport or in its vicinity.
- 6.1.4 Where an approach/departure path at a heliport is located over water, the plan shall identify which agency is responsible for coordinating rescue in the event of a helicopter ditching and indicate how to contact that agency.
- 6.1.5 The plan shall include, as a minimum, the following information:
  - a) the types of emergencies planned for;
  - b) how to initiate the plan for each emergency specified;
  - c) the name of agencies on and off the heliport to contact for each type of emergency with telephone numbers or other contact information;
  - d) the role of each agency for each type of emergency;
  - e) a list of pertinent on-heliport services available with telephone numbers or other contact information;
  - f) copies of any written agreements with other agencies for mutual aid and the provision of emergency services; and
  - g) a grid map of the heliport and its immediate vicinity.

- 6.1.6** All agencies identified in the plan shall be consulted about their role in the plan.
- 6.1.7** The plan shall be reviewed and the information in it updated at least yearly or, if deemed necessary, after an actual emergency, so as to correct any deficiency found during an actual emergency.
- 6.1.8** A test of the emergency plan shall be carried out at least once every three years.

## **6.2 Rescue and firefighting**

### **General — Introductory Notes**

*The content of this section has been extensively revised and updated for Amendment 9. With new concepts and terms now to consider, it is important that section 6.2 be read in conjunction with the appropriate detailed guidance on rescue and firefighting options given in the Heliport Manual (Doc 9261).*

*Provisions described in this section are intended to address incidents or accidents within the heliport response area only. No dedicated firefighting provisions are included for helicopter accidents or incidents that may occur outside the response area, such as on an adjacent roof near an elevated heliport.*

*Complementary agents are ideally dispensed from one or two extinguishers (although more extinguishers may be permitted where high volumes of an agent are specified, e.g. H3 operations). The discharge rate of complementary agents needs to be selected for optimum effectiveness of the agent used. When selecting dry chemical powders for use with foam, care needs to be exercised to ensure compatibility. Complementary agents need to comply with the appropriate specifications of the International Organization for Standardization (ISO).*

*Where a fixed monitor system (FMS) is installed, trained monitor operators, where provided, be positioned on at least the upwind location to ensure primary media is directed to the seat of the fire. For a ring-main system (RMS) practical testing has indicated that these solutions are only guaranteed to be fully effective for TLOFs up to 20 m diameter. If the TLOF is greater than 20 m a RMS should not be considered unless supplemented by other means to distribute primary media (e.g. additional pop-up nozzles are installed in the centre of the TLOF).*

*The International Convention for the Safety of Life at Sea (SOLAS) sets forth provisions on rescue and firefighting (RFF) arrangements for purpose-built and non-purpose-built shipboard heliports, in SOLAS regulations II-2/18, II-2-Helicopter Facilities, and the SOLAS Fire Safety Systems Code.*

*It may therefore be assumed that this chapter does not include RFF arrangements for purpose-built or non-purpose-built shipboard heliports or for winching areas.*

### **6.2.1 Applicability**

- 6.2.1.1** 6.2.1.1 The following specifications shall apply to new builds or replacement of existing systems or part thereof from 1 January 2023: 6.2.2.1, 6.2.3.3, 6.2.3.4, 6.2.3.6, 6.2.3.7, 6.2.3.9, 6.2.3.10, 6.2.3.12, 6.2.3.13 and 6.2.4.2.

**Note:** For areas for the exclusive use of helicopters at aerodromes primarily for the use of aeroplanes, distribution of extinguishing agents, response time, rescue equipment and personnel have not been considered in this section; see CAR139, PART I, Chapter 9.

- 6.2.1.2** Rescue and firefighting equipment and services shall be provided at helidecks and at elevated heliports located above occupied structures.

- 6.2.1.3** A safety risk assessment shall be performed to determine the need for rescue and firefighting equipment and services at surface level heliports and elevated heliports located above unoccupied structures.

**Note:** Further guidance on factors to inform the safety risk assessment, including staffing models for heliports with only occasional movements and examples of unoccupied areas that may be located beneath elevated heliports, are given in the Heliport Manual (Doc 9261).

## **6.2.2 Level of protection provided**

- 6.2.2.1** For the application of primary media, the discharge rate (in litres/minute) applied over the assumed practical critical area (in m<sup>2</sup>) shall be predicated on a requirement to bring any fire which may occur on the heliport under control within one minute, measured from activation of the system at the appropriate discharge rate.

### **Practical critical area calculation where primary media is applied as a solid stream**

**Note:** This section is not applicable to helidecks regardless of how primary media is being delivered.

- 6.2.2.2** The practical critical area shall be calculated by multiplying the helicopter fuselage length (m) by the helicopter fuselage width (m) plus an additional width factor (W1) of 4 m. Categorization from H0 to H3 shall be determined on the basis of the fuselage dimensions in Table 6-1 below.

**Table 6-1. Heliport firefighting category**

| Category<br>(1) | Maximum<br>fuselage length<br>(2)      | Maximum<br>fuselage width<br>(3) |
|-----------------|----------------------------------------|----------------------------------|
| H0              | up to but not including 8 m            | 1.5 m                            |
| H1              | from 8 m up to but not including 12 m  | 2 m                              |
| H2              | from 12 m up to but not including 16 m | 2.5 m                            |
| H3              | from 16 m up to 20 m                   | 3 m                              |

**Note 1:** For helicopters which exceed one or both of the dimensions for a category H3 heliport, it will be necessary to recalculate the level of protection using practical critical area assumptions based on the actual fuselage length and the actual fuselage width of the helicopter plus an additional width factor (W1) of 6 m.

**Note 2:** The practical critical area may be considered on a helicopter type-specific basis by using the formula in 6.2.2.2. Guidance on practical critical area in relation to the heliport firefighting category is given in the Heliport Manual (Doc 9261) where a discretionary 10 per cent tolerance on fuselage dimension “upper limits” is applied.

### **Practical critical area calculation where primary media is applied in a dispersed pattern**

**6.2.2.3** For heliports, except helidecks, the practical critical area shall be based on an area contained within the heliport perimeter, which always includes the TLOF, and to the extent that it is load-bearing, the FATO.

**6.2.2.4** For helidecks the practical critical area shall be based on the largest circle capable of being accommodated within the TLOF perimeter.

Note - Requirement 6.2.2.4, is applied for the practical critical area calculation for helidecks regardless of how primary media is being delivered.

### **6.2.3 Extinguishing agents**

**Note:** Throughout section 6.2.3 the discharge rate of a performance level B foam is assumed to be based on an application rate of 5.5 L/min/m<sup>2</sup>, and for a performance level C foam and for water, is assumed to be based on an application rate of 3.75 L/min/m<sup>2</sup>. These rates may be reduced if, through practical testing, a State demonstrates that the objectives of 6.2.2.1 can be achieved for a specific foam use at a lower discharge rate (l/min).

Information on the required physical properties and fire extinguishing performance criteria needed for a foam to achieve an acceptable performance level B or C rating is given in the Airport Services Manual (Doc 9137), Part 1.

### Surface level heliports with primary media applied as a solid stream using a portable foam application system (PFAS)

**Note:** Except for a limited-sized surface level heliport, the assumption is made that foam dispensing equipment will be transported to the incident or accident location on an appropriate vehicle (a PFAS).

**6.2.3.1** Where an RFFS is provided at a surface level heliport, the amount of primary media and complementary agents shall be in accordance with Table 6-2.

**Note:** The minimum discharge duration in Table 6-2 is assumed to be two minutes. However, if the availability of back-up specialist fire services is remote from the heliport, consideration may need to be given to increasing the discharge duration from two minutes to three minutes.

**Table 6-2 Minimum usable amounts of extinguishing agents for surface-level heliports**

| Category | Foam meeting performance level B |                                         | Foam meeting performance level C |                                         | Complementary agents     |                    |
|----------|----------------------------------|-----------------------------------------|----------------------------------|-----------------------------------------|--------------------------|--------------------|
|          | Water (L)                        | Discharge rate foam solution/minute (L) | Water (L)                        | Discharge rate foam solution/minute (L) | Dry chemical powder (kg) | Gaseous media (kg) |
| (1)      | (2)                              | (3)                                     | (4)                              | (5)                                     | (6)                      | (7)                |
| H 0      | 500                              | 250                                     | 330                              | 165                                     | 23                       | 9                  |
| H 1      | 800                              | 400                                     | 540                              | 270                                     | 23                       | 9                  |
| H 2      | 1 200                            | 600                                     | 800                              | 400                                     | 45                       | 18                 |
| H 3      | 1 600                            | 800                                     | 1 100                            | 550                                     | 90                       | 36                 |

### Elevated heliports with primary media applied as a solid stream using a fixed foam application system (FFAS)

**Note:** The assumption is made that primary media (foam) will be delivered through a fixed foam application system such as a fixed monitor system (FMS).

**6.2.3.2** Where an RFFS is provided at an elevated heliport, the amount of foam media and complementary agents shall be in accordance with Table 6-3.

**Note:** The minimum discharge duration in Table 6-3 is assumed to be five minutes.

Table 6-3 Minimum usable amounts of extinguishing agents for elevated heliports

| Category | Foam meeting performance level B |                                         | Foam meeting performance level C |                                         | Complementary agents     |                    |
|----------|----------------------------------|-----------------------------------------|----------------------------------|-----------------------------------------|--------------------------|--------------------|
|          | Water (L)                        | Discharge rate foam solution/minute (L) | Water (L)                        | Discharge rate foam solution/minute (L) | Dry chemical powder (kg) | Gaseous media (kg) |
| (1)      | (2)                              | (3)                                     | (4)                              | (5)                                     | (6)                      | (7)                |
| H 0      | 1 250                            | 250                                     | 825                              | 165                                     | 23                       | 9                  |
| H 1      | 2 000                            | 400                                     | 1 350                            | 270                                     | 45                       | 18                 |
| H 2      | 3 000                            | 600                                     | 2 000                            | 400                                     | 45                       | 18                 |
| H 3      | 4 000                            | 800                                     | 2 750                            | 550                                     | 90                       | 36                 |

**Note:** For guidance on the provision of additional hand-controlled foam branches for the application of aspirated foam, see the Heliport Manual (Doc 9261).

**Elevated heliports/ limited-sized surface level heliports with primary media applied in a dispersed pattern through a fixed foam application system (FFAS) – a solid plate heliport**

**6.2.3.3** The amount of water required for foam production shall be predicated on the practical critical area (m<sup>2</sup>) multiplied by the appropriate application rate (L/min/m<sup>2</sup>), giving a discharge rate for foam solution (in L/min). The discharge rate shall be multiplied by the discharge duration to calculate the amount of water needed for foam production.

**6.2.3.4** The discharge duration shall be at least three minutes.

**6.2.3.5** Complementary media shall be in accordance with Table 6-3, for H2 operations.

**Note:** For helicopters with a fuselage length greater than 16 m and/or a fuselage width greater than 2.5 m, complementary media in Table 6-3 for H3 operations may be considered.

**Purpose-built elevated heliports/limited-sized surface level heliport with primary media applied in a dispersed pattern through a fixed application system (FAS) – a passive fire retarding surface with water-only DIFFS**

**6.2.3.6** The amount of water required shall be predicated on the practical critical area (m<sup>2</sup>) multiplied by the appropriate application rate (3.75 L/min/m<sup>2</sup>) giving a discharge rate for water (in L/min). The discharge rate shall be multiplied by the discharge duration to determine the total amount of water needed.

**6.2.3.7** The discharge duration shall be at least two minutes.

**6.2.3.8** Complementary media shall be in accordance with Table 6-3, for H2 operations.

**Note:** For helicopters with a fuselage length greater than 16 m and/or a fuselage width greater than 2.5 m, complementary media for H3 operations may be considered.

**Purpose-built helidecks with primary media applied in a solid stream or a dispersed pattern through a fixed foam application system (FFAS) – a solid plate heliport**

**6.2.3.9** The amount of water required for foam media production shall be predicated on the practical critical area (m<sup>2</sup>) multiplied by the application rate (L/min/m<sup>2</sup>) giving a discharge rate for foam solution (in L/min). The discharge rate shall be multiplied by the discharge duration to calculate the amount of water needed for foam production.

**6.2.3.10** The discharge duration shall be at least five minutes.

**6.2.3.11** Complementary media shall be in accordance with Table 6-3, H0 levels for helidecks up to and including 16.0 m and to H1/H2 levels for helidecks greater than 16.0 m. Helidecks greater than 24 m shall adopt H3 levels.

**Note:** For guidance on the provision of additional hand-controlled foam branches for the application of aspirated foam, see the Heliport Manual (Doc 9261).

**Purpose-built helidecks with primary media applied in a dispersed pattern through a fixed application system (FAS) – a passive fire-retarding surface with water-only DIFFS**

**6.2.3.12** The amount of water required shall be predicated on the practical critical area (m<sup>2</sup>) multiplied by the application rate (3.75 L/min/m<sup>2</sup>) giving a discharge rate for water (in L/min). The discharge rate shall be multiplied by the discharge duration to calculate the amount of water needed.

**Note:** Sea-water may be used.

**6.2.3.13** The discharge duration shall be at least three minutes.

**6.2.3.14** Complementary media shall be in accordance with Table 6-3, to H0 levels for helidecks up to and including 16.0 m and to H1/H2 levels for helidecks greater than 16.0 m. Helidecks greater than 24 m shall adopt H3 levels.

**6.2.4 Response time**

**6.2.4.1** At surface level heliports, the operational objective of the rescue and firefighting response shall be to achieve response times not exceeding two minutes in optimum conditions of visibility and surface conditions.

**Note:** Response time is considered to be the time between the initial call to the rescue and firefighting service and the time when the first responding vehicle(s) (the service) is (are) in position to apply foam at a rate of at least 50 per cent of the discharge rate specified in Table 6-2.

**6.2.4.2** At elevated heliports, limited-sized surface level heliports and helidecks, the response time for the discharge of primary media at the required application rate shall be 15 seconds measured from system activation. If rescue and firefighting personnel are

needed, they shall be immediately available on or in the vicinity of the heliport while helicopter movements are taking place.

### **6.2.5 Rescue arrangements**

**6.2.5.1** Rescue arrangements commensurate with the overall risk of the helicopter operation shall be provided at the heliport.

**Note:** *Guidance on the rescue arrangements, e.g. options for rescue and for personal protective equipment to be provided at a heliport, is given in the Heliport Manual (Doc 9261).*

### **6.2.6 Communication and alerting system**

**6.2.6.1** A suitable alerting and/or communication system shall be provided in accordance with the emergency response plan.

### **6.2.7 Personnel**

**Note:** *The provision of rescue and firefighting personnel may be determined by use of a task/resource analysis. Guidance is given in the Heliport Manual (Doc 9261).*

**6.2.7.1** Where provided, the number of rescue and firefighting personnel shall be sufficient for the required task.

**6.2.7.2** Where provided, rescue and firefighting personnel shall be trained to perform their duties, and maintain their competence.

**6.2.7.3** Rescue and firefighting personnel shall be provided with protective equipment.

### **6.2.8 Means of escape**

**6.2.8.1** Elevated heliports and helidecks shall be provided with a main access and at least one additional means of escape.

**6.2.8.2** Access points shall be located as far apart from each other as is practicable.

**Note:** *The provision of an alternative means of escape is necessary for evacuation and for access by rescue and firefighting personnel. The size of an emergency access/egress route may require consideration of the number of passengers and of special operations like Helicopter Emergency Medical Services (HEMS) that require passengers to be carried on stretchers or trolleys.*

## CHAPTER 7. WATER AERODROMES

7.1 This Chapter provides design and operations specifications for water aerodromes to address those requirements unique to water aerodromes. Unless specified in this Chapter, a water aerodrome operator shall comply with the requirements for a land aerodrome as specified in CAR139. It sets out the minimum requirements for site selection, floating platform construction and installation, rescue and firefighting service, and facilitation at a floating platform.

7.2 When selecting a site for water aerodrome and installation of floating platform, a water aerodrome operator shall consider:

- a. The location of the proposed water aerodrome inside protected waters,
- b. The depth of sea bed on the proposed water runway and the size of aircraft intended to operation,
- c. Distance of water aerodrome from the servicing resorts, jetty or beach,
- d. Maritime movements in the location,
- e. Navigable airspace, and restricted areas,
- f. Effect on the surrounding community,
- g. Available length of clear and safe water runway strip with respect to the size and type of aircraft intended for use,
- h. Any inhospitable terrain under the route to and from the water aerodrome,
- i. Location shall be such that cross wind operations are kept to a minimum and downwind operations shall be avoided; i.e. the landing and take-off areas shall be oriented to permit operations into the wind. Nature Reserved designated marine areas and Fishing Grounds shall not be used for water aerodromes. The strip of water shall be free from large obstructing coral rubbles to a definite depth and located inside protected waters which is safe to use during landing/take-off by the aircraft intended to use the aerodrome at low tide.

7.3 A water aerodrome operator shall measure or described and submit to the CAA the following data, as appropriate, for each facility provided on a water aerodrome and the data promulgated directly to the users of the water aerodrome and/or published in the Sultanate of Oman AIP:

- a. Water aerodrome type — tidal, or non-tidal, private or public use;
- b. Dimensions of area usable for landing and take-off;
- c. Final approach and take-off area — directions available and not available;
- d. Rescue and firefighting category available;
- e. Taxiing routes to pontoon, jetty, beach or other designating landing/boarding/embarkation facility;
- f. Details of designating landing/boarding/embarkation facility;

- g. Significant obstacles on and in the vicinity of the water aerodrome: location, top elevation to the nearest (next higher) meter or foot, type;
- h. Visual aids for approach procedures, marking and lighting of usable areas, landing/boarding/embarkation facilities;
- i. Location of wind direction indicator;
- j. Aerodrome operating limitations, including maximum aircraft size, RFFS category, daytime and VMC (specifying visibility, cloud ceiling and distance from cloud);
- k. Coordinates (WGS84) of each platform, landing jetty, landing beach, and the extents of the water landing area.

7.4 A water aerodrome operator shall provide to CAA an aerial map or photograph of the water landing area, showing the existing or proposed locations for the jetty, platform, landing beach, and water landing area, together with dimensions and coordinates.

7.5 If the aerodrome operator is not the owner of the water aerodrome and associated land facilities, then the water aerodrome operator shall forward to the CAA a no objection letter from the owner of the proposed locality to use the intended water and land area(s) as a water aerodrome.

7.6 A water aerodrome operator shall ensure that the dimensions of the water runway depending on, shall be suitable according to:

- a. The size of the aircraft intended to use the aerodrome.
- b. The performance characteristics of the aircraft
- c. The clearance of approach and take-off climb paths from obstacles.

7.7 A water aerodrome operator shall ensure that a floating platform provides adequate support and buoyancy for the loads imposed by embarking/disembarking passengers, their luggage, and any other goods.

7.8 A water aerodrome operator shall ensure that a floating platform is inspected at suitable regular intervals to check the structural conditions of the platform and safety equipment. A water aerodrome operator shall keep records of such inspections and make them available for inspection by the CAA.

7.9 A water aerodrome operator shall ensure that each floating platform is equipped with the following minimum equipment which shall be immediately available by either rescue boat or by distribution around the beach, jetty and platform for immediate use.

- a. Rescue equipment according to the RFF category;
- b. Firefighting media and equipment according to the RFF category, ready for use within the response time anywhere within the water landing area, and at the beach, jetty and platform.
- c. On the jetty and platform: easily accessible life buoys and 30m life line rope shall be for use in case of an emergency.

- 7.10 A water aerodrome operator shall ensure that the floating platform, its anchoring blocks, and any buoys are removed from the location within one month after revocation of the aerodrome license.
- 7.11 A water aerodrome operator shall ensure that a water aerodrome is provided with approach and take-off areas in accordance with the requirements of CAR 139-Part I commensurate with the aeroplane reference code of the largest aeroplane intended to use the aerodrome. These areas shall be clear of obstacles.
- 7.12 A water aerodrome operator shall ensure that a water aerodrome has sufficient approach and take-off climb surfaces, clear of obstacles, to ensure that an aircraft can conduct a landing or take-off into wind in the existing wind conditions.
- 7.13 If the water aerodrome is not useable in all directions, then a water aerodrome operator shall ensure that it has sufficient transitional surfaces clear of obstacles, in effect all around the water landing area parallel to the direction of use of all water runways, commencing at a distance from the imaginary centreline of the water runway, as if a runway strip were established. Up to an aeroplane reference field length of 1199 metres the gradient of the transitional surface shall be 1:5 (aerodrome reference code 2 visual).
- 7.14 A water aerodrome operator shall provide a Wind Direction Indicator fixed on land at a point that is in the nearest vicinity to the water runway and floating platform to enable the pilot to find the wind direction and have an indication of wind velocity. For this purpose, a wind sleeve of sufficient size and suitably conspicuous colour shall be installed to be visible from an aeroplane flying at a height of 600 feet.
- 7.15 A water aerodrome operator shall provide on the jetty and floating platform:
- a. A flashing yellow light/beacon in accordance with CAR 139-Part I.
  - b. The flashing yellow/beacon's height shall be one meter above the level of the platform.
  - c. The beacon and its fixing strut shall be made out of frangible material.
  - d. The beacon shall be ON during the operation of the water aerodrome.
- 7.16 A water aerodrome operator shall ensure that any obstacle in or out of water, near the water runway or taxi way, that may endanger safety is marked with a floating buoy.
- 7.17 If deemed necessary for operational conspicuity, a water aerodrome operator shall ensure that the outer boundary of the entire water landing area is marked by floating buoys of a suitable conspicuous colour, together with a flashing yellow light/beacon in accordance with CAR 139-Part I.
- 7.18 A water aerodrome operator shall provide motorised boat that shall be available for the purpose of transferring passengers to and from the floating platforms to the jetty. This transfer boat shall be separate from any rescue or fire fighting boat(s). A boat shall be at least 200 m away from the floating platform and water runway when the aircraft is ready to land or at take-off and shall not obstruct the water runway. The A/G radio operator will give instructions by radio to the boat captain about the direction of water runway, and the movements of the aircraft for taxi and the specific time of its arrivals.

- 7.19 A water aerodrome operator shall provide an aerodrome rescue and firefighting service at water aerodromes at all times when aircraft operations are expected or are taking place. This RFFS *shall* be commensurate with CAR 139-Part I, appropriate to the size of aircraft using the water aerodrome.
- 7.20 A water aerodrome operator shall provide a rescue and firefighting boat in addition to the transfer boat, and it shall be equipped with:
- a. Firefighting media and means of application
  - b. Rescue equipment appropriate to the aircraft RFF category
  - c. A life raft for immediate deployment in the event of an aircraft crash on water, of capacity equal to the passenger and crew capacity of the aircraft using the aerodrome.
  - d. Licensed communication equipment to communicate directly with the aircraft commander when it is on water, and with the aerodrome manager for the purposes of emergency alerting, command and control.
  - e. Medical equipment commensurate with the category of aircraft and its passenger load. The operational objective of the rescue and firefighting service shall be to achieve a response time not exceeding two minutes to any point of each operational runway, in optimum visibility and surface conditions, and three minutes to any other part of the water aerodrome used by the aircraft.
- 7.21 The water aerodrome operator shall prepare an aerodrome emergency plan submit the aerodrome emergency plan to CAA for approval.
- 7.22 A water aerodrome operator shall ensure that manning levels consider the type and number of appliances in use at the floating platform, the method of operation of appliances and equipment, and any other relevant details in order to meet the RFFS category equal to the aircraft using the aerodrome.
- 7.23 A water aerodrome operator shall ensure that all personnel involved in rescue and firefighting duties receive appropriate competency based and assessed initial and recurring training in the use of rescue and firefighting equipment and media provided and in a water aerodrome environment. This shall include on-going operational exercises and theoretical and procedural training. Records of such training shall be made available to the CAA whenever an inspector from CAA requests.
- 7.24 A water aerodrome operator shall ensure that licensed air-ground communications of at least the level of an air ground radio service shall be provided at all times when aircraft operations are expected. The aerodrome operator shall ensure that the Pilot and aerodrome A/G radio operator are linked by the telephone or radio for giving flight details in advance allowing the A/G radio operator to be prepared to attend the arriving flight. For communication during flight under VFR, each aerodrome operator shall be equipped with suitable radio equipment capable of conducting two-way communication with the aeroplane. For this purpose, the A/G radio operator shall be suitably trained, and shall be authorised by CAA for the purpose.

7.25 Operations at night, and operations under instrument meteorological conditions are NOT permitted to or from water aerodromes.

## APPENDIX 1. PROVISIONS FOR INSTRUMENT HELIPORTS WITH NON-PRECISION AND/OR PRECISION APPROACHES AND INSTRUMENT DEPARTURES

### 1. GENERAL

**Introductory Note 1:** CAR 139 PART2, contains Standards and Recommended Practices (specifications) that prescribe the physical characteristics and obstacle limitation surfaces to be provided for at heliports, and certain facilities and technical services normally provided at a heliport. It is not intended that these specifications limit or regulate the operation of an aircraft.

**Introductory Note 2:** The specifications in this appendix describe additional conditions beyond those found in the main sections of CAR 139 PART2, that apply to instrument heliports with non-precision and/or precision approaches. All specifications contained within the main chapters of CAR 139 PART2, are equally applicable to instrument heliports, but with reference to further provisions described in this Appendix.

### 2. HELIPORT DATA

#### 2.1 Heliport elevation

The elevation of the TLOF and/or the elevation and geoid undulation of each threshold of the FATO (where appropriate) shall be measured and reported to the aeronautical information services authority to the accuracy of:

- a) one-half metre or foot for non-precision approaches; and
- b) one-quarter metre or foot for precision approaches.

**Note:** Geoid undulation must be measured in accordance with the appropriate system of coordinates.

#### 2.2 Heliport dimensions and related information

The following additional data shall be measured or described, as appropriate, for each facility provided on an instrument heliport:

- a) distances to the nearest metre or foot of localizer and glide path elements comprising an instrument landing system (ILS) or azimuth and elevation antenna of a microwave landing system (MLS) in relation to the associated TLOF or FATO extremities.

### 3. PHYSICAL CHARACTERISTICS

#### 3.1 Surface-level and elevated heliports

## Safety areas

A safety area surrounding an instrument FATO shall extend:

- a) laterally to a distance of at least 45 m on each side of the centre line; and
- b) longitudinally to a distance of at least 60 m beyond the ends of the FATO.

**Note:** See Figure A1-1.

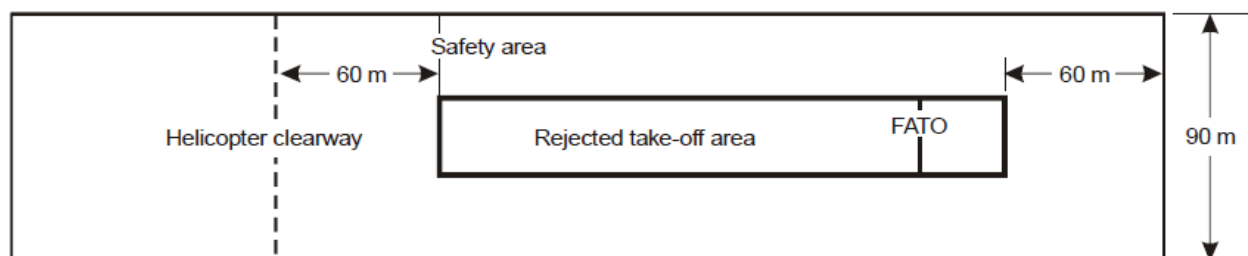


Figure A1-1. Safety area for instrument FATO

## 4. OBSTACLE ENVIRONMENT

### 4.1 Obstacle limitation surfaces and sectors

#### Approach surface

*Characteristics.* The limits of an approach surface shall comprise:

- a) an inner edge horizontal and equal in length to the minimum specified width of the FATO plus the safety area, perpendicular to the centre line of the approach surface and located at the outer edge of the safety area;
- b) two side edges originating at the ends of the inner edge;
  - i. for an instrument FATO with a non-precision approach, diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO;
  - ii. for an instrument FATO with a precision approach, diverging uniformly at a specified rate from the vertical plane containing the centre line of the FATO, to a specified height above FATO, and then diverging uniformly at a specified rate to a specified final width and continuing thereafter at that width for the remaining length of the approach surface; and
- c) an outer edge horizontal and perpendicular to the centre line of the approach surface and at a specified height above the elevation of the FATO.

### 4.2 Obstacle limitation requirements

4.2.1. The following obstacle limitation surfaces shall be established for an instrument FATO with a non-precision and/or precision approach:

- a) take-off climb surface;
- b) approach surface; and
- c) transitional surfaces.

**Note:** See Figure A1-2 to A1-5.

4.2.2. The slopes of the obstacle limitation surfaces shall not be greater than, and their other dimensions not less than, those specified in Tables A1-1 to A2-3.

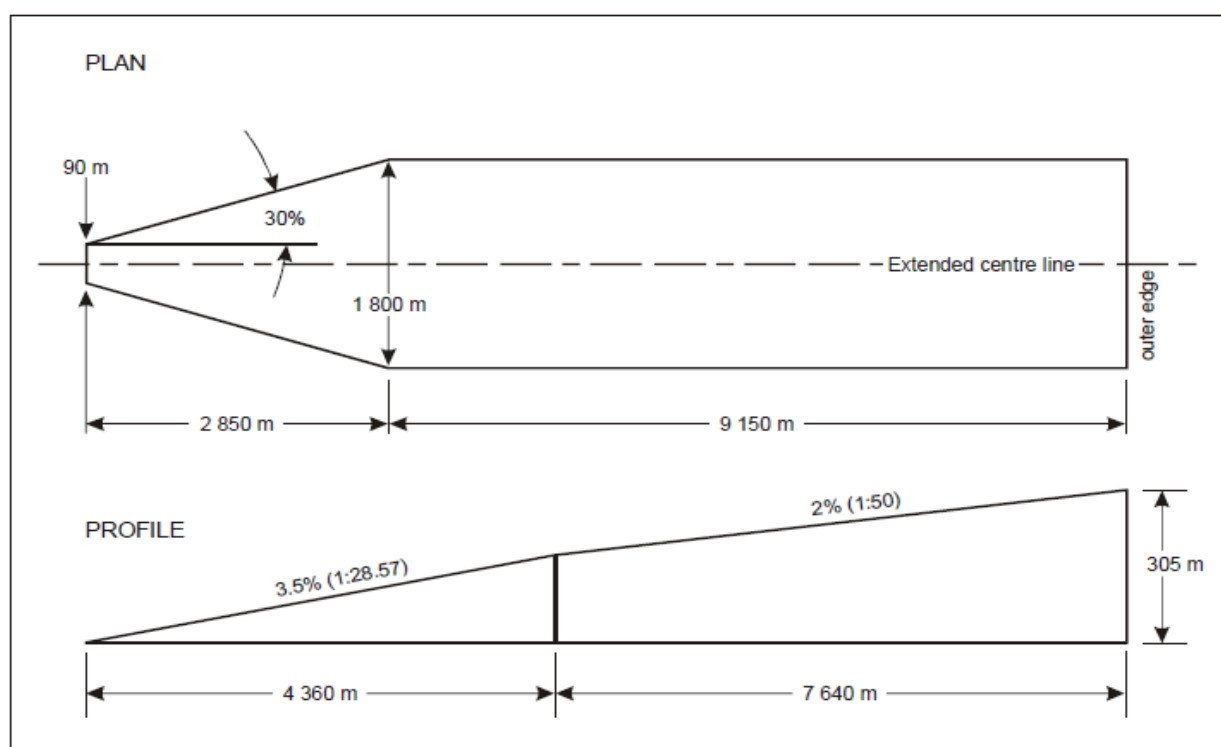


Figure A1-2. Take-off climb surface for instrument FATO



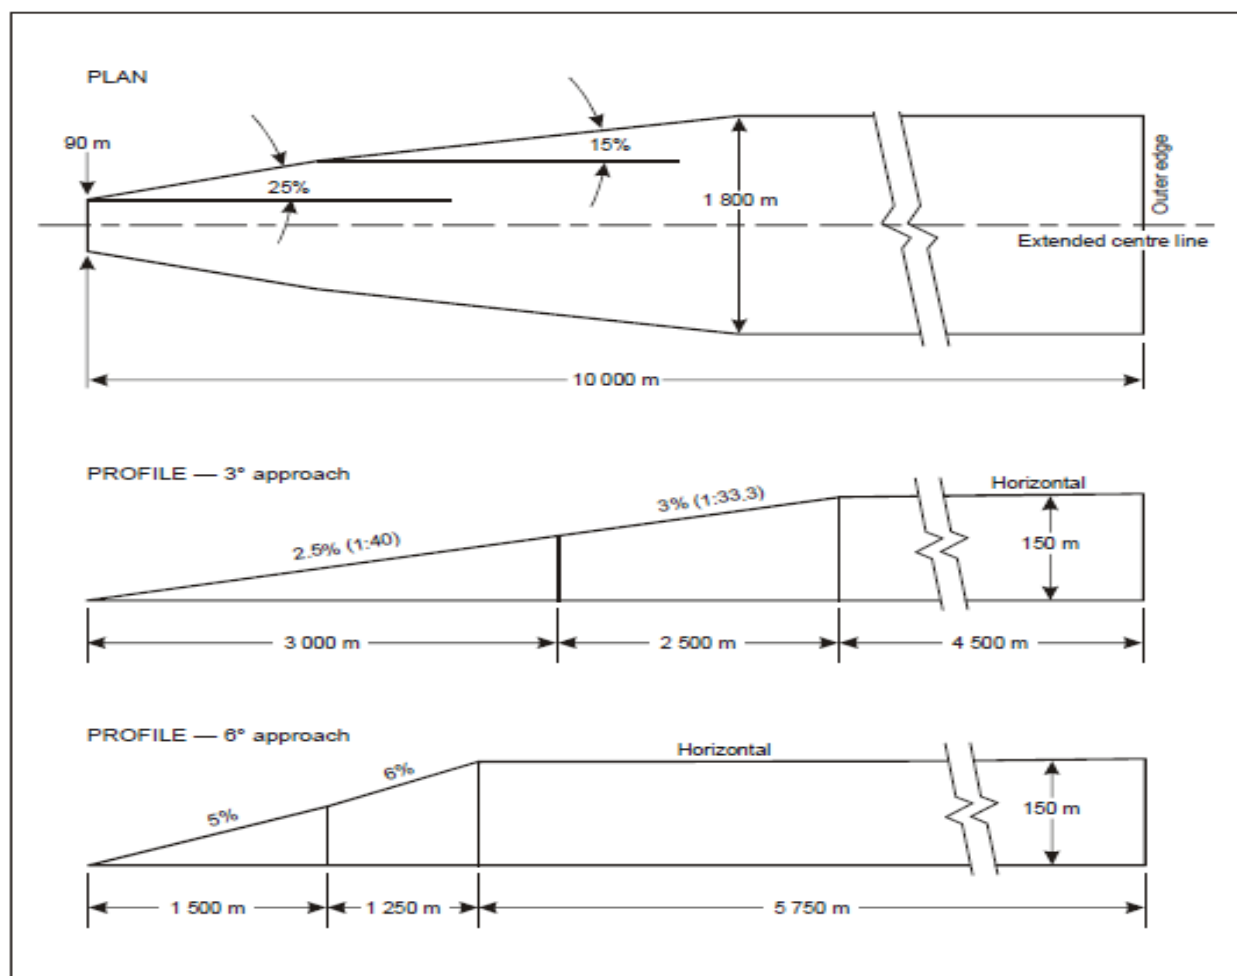


Figure A1-3. Approach surface for precision approach FATO

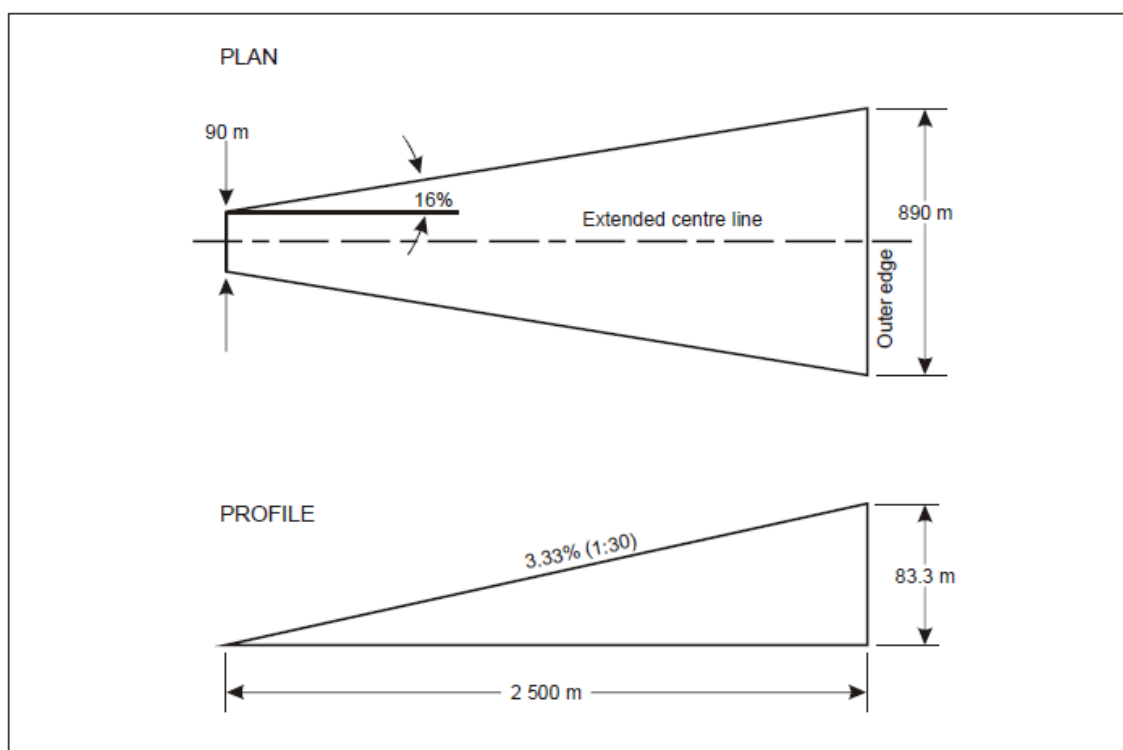

**Figure A1-4. Approach surface for non-precision approach FATO**

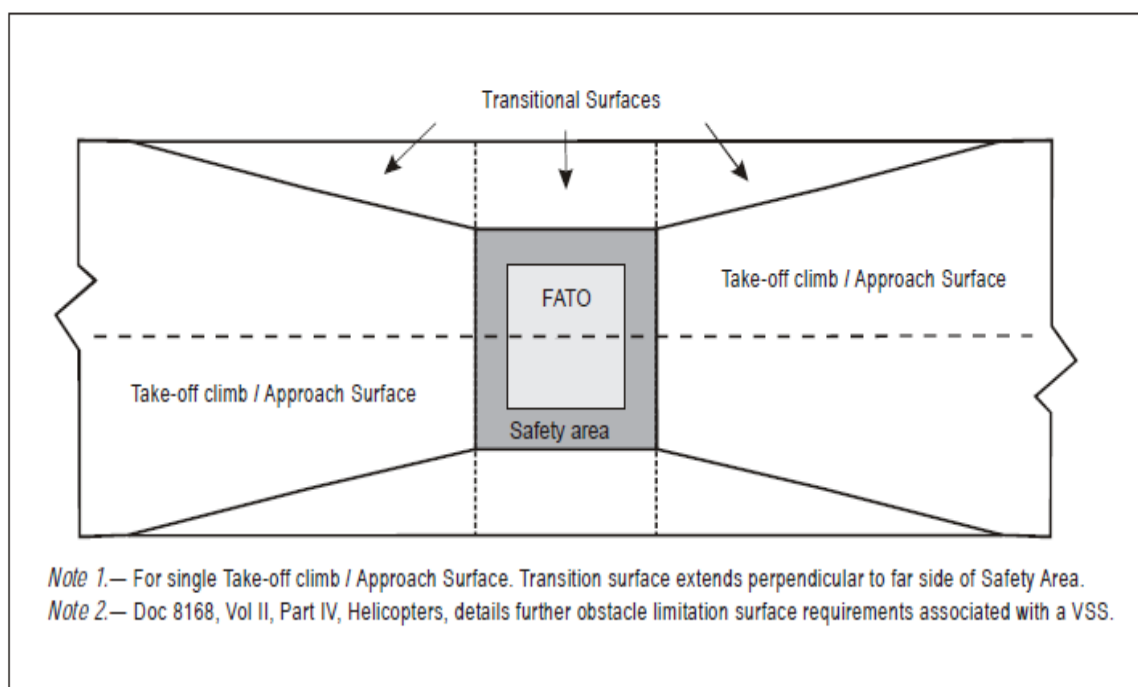

**Figure A1-5. Transitional surfaces for an instrument FATO with a non-precision and/or precision approach**

Table A1-1. Dimensions and slopes of obstacle limitation surfaces Instrument (Non-precision) FATO

| <i>SURFACE and DIMENSIONS</i> |         |                      |
|-------------------------------|---------|----------------------|
| <b>APPROACH SURFACE</b>       |         |                      |
| Width of inner edge           |         | Width of safety area |
| Location of inner edge        |         | boundary             |
| <b>First Section</b>          |         |                      |
| Divergence                    | — day   | 16%                  |
|                               | — night |                      |
| Length                        | — day   | 2 500 m              |
|                               | — night |                      |
| Outer width                   | — day   | 890 m                |
|                               | — night |                      |
| Slope (maximum)               |         | 3.33%                |
| <b>Second Section</b>         |         |                      |
| Divergence                    | — day   | —                    |
|                               | — night |                      |
| Length                        | — day   | —                    |
|                               | — night |                      |
| Outer width                   | — day   | —                    |
|                               | — night |                      |
| Slope (maximum)               |         | —                    |
| <b>Third Section</b>          |         |                      |
| Divergence                    |         | —                    |
| Length                        | — day   | —                    |
|                               | — night |                      |
| Outer width                   | — day   | —                    |
|                               | — night |                      |
| Slope (maximum)               |         | —                    |
| <b>TRANSITIONAL</b>           |         |                      |
| Slope                         |         | 20%                  |
| Height                        |         | 45 m                 |

Table A1-2. Dimensions and slopes of obstacle limitation surfaces Instrument (Precision) FATO

| Surface and dimensions                    | 3° approach       |                  |                  |                  | 6° approach       |                  |                  |                  |
|-------------------------------------------|-------------------|------------------|------------------|------------------|-------------------|------------------|------------------|------------------|
|                                           | Height above FATO |                  |                  |                  | Height above FATO |                  |                  |                  |
|                                           | 90 m<br>(300 ft)  | 60 m<br>(200 ft) | 45 m<br>(150 ft) | 30 m<br>(100 ft) | 90 m<br>(300 ft)  | 60 m<br>(200 ft) | 45 m<br>(150 ft) | 30 m<br>(100 ft) |
| APPROACH SURFACE                          |                   |                  |                  |                  |                   |                  |                  |                  |
| Length of inner edge                      | 90 m              | 90 m             | 90 m             | 90 m             | 90 m              | 90 m             | 90 m             | 90 m             |
| Distance from end of FATO                 | 60 m              | 60 m             | 60 m             | 60 m             | 60 m              | 60 m             | 60 m             | 60m              |
| Divergence each side to height above FATO | 25%               | 25%              | 25%              | 25%              | 25%               | 25%              | 25%              | 25%              |
| Distance to height above FATO             | 1 745 m           | 1 163 m          | 872 m            | 581 m            | 870 m             | 580 m            | 435 m            | 290 m            |
| Width at height above FATO                | 962 m             | 671 m            | 526 m            | 380 m            | 521 m             | 380 m            | 307.5 m          | 235 m            |
| Divergence to parallel section            | 15%               | 15%              | 15%              | 15%              | 15%               | 15%              | 15%              | 15%              |
| Distance to parallel section              | 2 793 m           | 3 763 m          | 4 246 m          | 4 733 m          | 4 250 m           | 4 733 m          | 4 975 m          | 5 217 m          |
| Width of parallel section                 | 1 800 m           | 1 800 m          | 1 800 m          | 1 800 m          | 1 800 m           | 1 800 m          | 1 800 m          | 1 800 m          |
| Distance to outer edge                    | 5 462 m           | 5 074 m          | 4 882 m          | 4 686 m          | 3 380 m           | 3 187 m          | 3 090 m          | 2 993 m          |
| Width at outer edge                       | 1 800 m           | 1 800 m          | 1 800 m          | 1 800 m          | 1 800 m           | 1 800 m          | 1 800 m          | 1 800 m          |
| Slope of first section                    | 2.5%<br>(1:40)    | 2.5%<br>(1:40)   | 2.5%<br>(1:40)   | 2.5%<br>(1:40)   | 5%<br>(1:20)      | 5%<br>(1:20)     | 5%<br>(1:20)     | 5%<br>(1:20)     |
| Length of first section                   | 3 000 m           | 3 000 m          | 3 000 m          | 3 000 m          | 1 500 m           | 1 500 m          | 1 500 m          | 1 500 m          |
| Slope of second section                   | 3%<br>(1:33.3)    | 3%<br>(1:33.3)   | 3%<br>(1:33.3)   | 3%<br>(1:33.3)   | 6%<br>(1:16.66)   | 6%<br>(1:16.66)  | 6%<br>(1:16.66)  | 6%<br>(1:16.66)  |
| Length of second section                  | 2 500 m           | 2 500 m          | 2 500 m          | 2 500 m          | 1 250 m           | 1 250 m          | 1 250 m          | 1 250 m          |
| Total length of surface                   | 10 000 m          | 10 000 m         | 10 000 m         | 10 000 m         | 8 500 m           | 8 500 m          | 8 500 m          | 8 500 m          |
| TRANSITIONAL                              |                   |                  |                  |                  |                   |                  |                  |                  |
| Slope                                     | 14.3%             | 14.3%            | 14.3%            | 14.3%            | 14.3%             | 14.3%            | 14.3%            | 14.3%            |
| Height                                    | 45 m              | 45 m             | 45 m             | 45 m             | 45 m              | 45 m             | 45 m             | 45 m             |

Table A1-3. Dimensions and slopes of obstacle limitation surfaces

**STRAIGHT TAKE-OFF**

| <i>SURFACE and DIMENSIONS</i>                                                                                                  |         | <i>Instrument</i>           |
|--------------------------------------------------------------------------------------------------------------------------------|---------|-----------------------------|
| <b>TAKE-OFF CLIMB</b>                                                                                                          |         |                             |
| Width of inner edge                                                                                                            |         | 90 m                        |
| Location of inner edge                                                                                                         |         | Boundary of end of clearway |
| <b>First Section:</b>                                                                                                          |         |                             |
| Divergence                                                                                                                     | — day   | 30%                         |
|                                                                                                                                | — night |                             |
| Length                                                                                                                         | — day   | 2 850 m                     |
|                                                                                                                                | — night |                             |
| Outer width                                                                                                                    | — day   | 1 800 m                     |
|                                                                                                                                | — night |                             |
| Slope (maximum)                                                                                                                |         | 3.5%                        |
| <b>Second Section:</b>                                                                                                         |         |                             |
| Divergence                                                                                                                     | — day   | parallel                    |
|                                                                                                                                | — night |                             |
| Length                                                                                                                         | — day   | 1 510 m                     |
|                                                                                                                                | — night |                             |
| Outer width                                                                                                                    | — day   | 1 800 m                     |
|                                                                                                                                | — night |                             |
| Slope (maximum)                                                                                                                |         | 3.5%*                       |
| <b>Third Section:</b>                                                                                                          |         |                             |
| Divergence                                                                                                                     |         | parallel                    |
| Length                                                                                                                         | — day   | 7 640 m                     |
|                                                                                                                                | — night |                             |
| Outer width                                                                                                                    | — day   | 1 800 m                     |
|                                                                                                                                | — night |                             |
| Slope (maximum)                                                                                                                |         | 2%                          |
| * This slope exceeds the maximum mass one-engine-inoperative climb gradient of many helicopters which are currently operating. |         |                             |

## 5. VISUAL AIDS

### 5.1 Lights

#### Approach Lighting Systems

- 5.1.1. Where an approach lighting system is provided for a non-precision FATO, the system shall not be less than 210 m in length.
- 5.1.2. The light distribution of steady lights shall be as indicated in Figure 5-11, Illustration 2 except that the intensity shall be increased by a factor of three for a non-precision FATO.

**Table A1-4. Dimensions and slopes of the obstacle protection surface**

| SURFACE AND DIMENSIONS                                                                                                 | NON-PRECISION FATO   |                    |
|------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------|
| Length of inner edge                                                                                                   | Width of safety area |                    |
| Distance from end of FATO                                                                                              | 60 m                 |                    |
| Divergence                                                                                                             | 15%                  |                    |
| Total length                                                                                                           | 2 500 m              |                    |
| Slope                                                                                                                  | PAPI                 | $A^a - 0.57^\circ$ |
|                                                                                                                        | HAPI                 | $A^b - 0.65^\circ$ |
|                                                                                                                        | APAPI                | $A^a - 0.9^\circ$  |
| a. As indicated in Annex 14, Volume I, Figure 5-19.<br>b. The angle of the upper boundary of the “below slope” signal. |                      |                    |

END