



Civil Aviation Authority

# **CAR OPS – 2**

## **Civil Aviation Regulation**

### **General Aviation Operations**

#### **(Aeroplane)**

**Effective: 3rd October 2024**

**Approved by: H.E Eng. Naif Ali Hamed Al Abri**  
**President of Civil Aviation Authority**

Copyright © 2024 by the Civil Aviation Authority (CAA), Oman

All rights reserved. No part of this publication may be stored in a retrieval system, transmitted, or reproduced in any way, including but not limited to photo-copy, magnetic or other record, without the prior agreement and written permission of the President, for the CAA, Oman

[illegible]

**Acronyms**

The following terms or acronyms may be used in any manual or document published by the CAA. Reproduction in part or whole is allowed without prior approval. The Document Control Office reserves the rights to include such a listing in any CAA manual or document prior to publishing.

ACAS II	Airborne Collision Avoidance System
AC	Advisory Circular
ACC	Area Control Centre
ACCID	Accident
ADREP	Accident/Incident Reporting System
AFIS	Aerodrome Flight Information Service
AFTN	Aeronautical Fixed Telecommunication Network
AIC	Aeronautical Information Circular
AIP	Aeronautical Information Publication
AIS	Aeronautical Information Service
A/C	Aircraft
AMC	Acceptable Means of Compliance
AMSL	Above Mean Sea Level
AOC	Air Operator Certificate
APP	Approach Control Office
ARO	Air Traffic Services Reporting Office
ATC	Air Traffic Control
ATS	Air Traffic Service
CAA	Civil Aviation Authority
CAR	Civil Aviation Regulation
CARS	Cockpit Audio Recording System
CFMU	Central Flow Management Unit
COM	Communications/Equipment
CVS	Combined vision system
EFB	Electronic flight bag
EUROCAE	European Organisation for Civil Aviation Equipment
FIC	Flight Information Centre
FIS	Flight Information Service
FPL or eFPL	Filed flight plan

GM	Guidance Material
IATA	International Air Transport Association
ICAO	International Civil Aviation Organisation
IEM	Interpretative Explanatory Material
IIC	Investigator in Charge
INCID	Serious Incident
ISA	International standard atmosphere
LED	Light emitting diode
Minister	Minister of Transport, Communication and IT
NOTAM	Notice to Airmen
NPA	Notice of Proposed Amendment
NVIS	Night vision imaging system
OTSB	Oman Transport Safety Bureau
PFP	Preliminary flight plan
PL	Policy Lead
RCC	Rescue Co-ordination Centre of the Sultanate
RNAV	Area Navigation
RTCA	Radio Technical Commission for Aeronautics
SAR	Search and Rescue
SIGMET	Significant Meteorological Report
SRA	Surveillance Radar Approach
SSR	Secondary Surveillance Radar
SVS	Synthetic vision system
TCAS	Traffic Alert and Collision Avoidance System (TCAS II or TCAS X)
TL	Technical Lead
UTC	Universal Time Coordinated
VHF	Very High Frequency
WX	Weather

## Definitions

When the following terms are used for the operation of aeroplanes in international general aviation, they have the following meanings:

**Advanced aircraft.** An aircraft with equipment in addition to that required for a basic aircraft for a given take-off, approach or landing operation.

**Aerial work.** An aircraft operation in which an aircraft is used for specialized services such as agriculture, construction, photography, surveying, observation and patrol, search and rescue, aerial advertisement, etc.

**Aerodrome.** A defined area on land or water (including any buildings, installations and equipment) intended to be used either wholly or in part for the arrival, departure and surface movement of aircraft.

**Agreement summary.** When an aircraft is operating under an Article 83 bis agreement between the State of Registry and another State, the agreement summary is a document transmitted with the Article 83 bis Agreement registered with the ICAO Council that identifies succinctly and clearly which functions and duties are transferred by the State of Registry to that other State.

**Note.** — *The other State in the above definition refers to the State of the principal location of a general aviation operator.*

**Airworthy.** The status of an aircraft, engine, propeller or part when it conforms to its approved design and is in a condition for safe operation.

**Alternate aerodrome.** An aerodrome to which an aircraft may proceed when it becomes either impossible or inadvisable to proceed to or to land at the aerodrome of intended landing where the necessary services and facilities are available, where aircraft performance requirements can be met and which is operational at the expected time of use. Alternate aerodromes include the following:

**Take-off alternate.** An alternate aerodrome at which an aircraft would be able to land should this become necessary shortly after take-off and it is not possible to use the aerodrome of departure.

**En-route alternate.** An alternate aerodrome at which an aircraft would be able to land in the event that a diversion becomes necessary while en-route.

**Destination alternate.** An alternate aerodrome at which an aircraft would be able to land should it become either impossible or inadvisable to land at the aerodrome of intended landing.

**Note.** — *The aerodrome from which a flight departs may also be an en-route or a destination alternate aerodrome for that flight.*

**Automatic deployable flight recorder (ADFR).** A combination flight recorder installed on the aircraft which is capable of automatically deploying from the aircraft.

**Cabin crew member.** A crew member who performs, in the interest of safety of passengers, duties assigned by the operator or the pilot-in-command of the aircraft, but who shall not act as a flight crew member.

**Continuing airworthiness records.** Records which are related to the continuing airworthiness status of an aircraft, engine, propeller or associated part

**Dangerous goods.** Articles or substances which are capable of posing a risk to health, safety, property or the environment and which are shown in the list of dangerous goods in the Technical Instructions or which are classified according to those Instructions.

**Note.** — *Dangerous goods are classified in Annex 18, Chapter 3.*

**Combined vision system (CVS).** A system to display images from a combination of an enhanced vision system (EVS) and a synthetic vision system (SVS).

**Electronic flight bag (EFB).** An electronic information system, comprised of equipment and applications for flight crew, which allows for the storing, updating, displaying and processing of EFB functions to support flight operations or duties.

**Enhanced vision system (EVS).** A system to display electronic real-time images of the external scene achieved through the use of image sensors.

**Note.** — *EVS does not include night vision imaging systems (NVIS).*

**Filed flight plan (FPL or eFPL).** The latest flight plan as submitted by the pilot, an operator or a designated representative for use by ATS units.

*Note.— The FPL denotes a filed flight plan exchanged using aeronautical fixed service while eFPL denotes a filed flight plan exchanged using FF-ICE services. The eFPL allows for the exchange of additional information not contained within the FPL.*

**Flight crew member.** A licensed crew member charged with duties essential to the operation of an aircraft during a flight duty period.

**Flight manual.** A manual, associated with the certificate of airworthiness, containing limitations within which the aircraft is to be considered airworthy, and instructions and information necessary to the flight crew members for the safe operation of the aircraft.

**Flight plan.** Specified information relative to an intended flight or portion of a flight of an aircraft.

*Note 1.— The term flight plan may be prefixed by the words “preliminary”, “filed”, “current” or “operational” to indicate the context and different stages of a flight*

*Note 2.— When the word “message” is used as a suffix to this term, it denotes the content and format of the flight plan data as transmitted.*

**Flight Recorder.** Any type of recorder installed in the aircraft for the purpose of complementing accident/incident investigation.

**Final approach segment (FAS).** That segment of an instrument approach procedure in which alignment and descent for landing are accomplished.

**Flight time** — aeroplanes. The total time from the moment an aeroplane first moves for the purpose of taking off until the moment it finally comes to rest at the end of the flight.

Note. — Flight time as here defined is synonymous with the term “block to block” time or “chock to chock” time in general usage which is measured from the time an aeroplane first moves for the purpose of taking off until it finally stops at the end of the flight.

**General aviation operation.** An aircraft operation other than a commercial air transport operation or an aerial work operation.

**Head-up display (HUD).** A display system that presents flight information into the pilot’s forward external field of view.

**Isolated aerodrome.** A destination aerodrome for which there is no destination alternate aerodrome suitable for a given aeroplane type.

**Operational flight plan.** The operator’s plan for the safe conduct of the flight based on considerations of aeroplane performance, other operating limitations and relevant expected conditions on the route to be followed and at the aerodromes concerned.

**Operations manual.** A manual containing procedures, instructions and guidance for use by operational personnel in the execution of their duties.

**Operator.** The person, organization or enterprise engaged in or offering to engage in an aircraft operation

**Preliminary flight plan (PFP).** The information related to a flight submitted by an operator or a designated representative to conduct collaborative planning of a flight, prior to filing a flight plan.

**Psychoactive substances.** Alcohol, opioids, cannabinoids, sedatives and hypnotics, cocaine, other psychostimulants, hallucinogens, and volatile solvents, whereas coffee and tobacco are excluded.

**Point of no return.** The last possible geographic point at which an aeroplane can proceed to the destination aerodrome as well as to an available en-route alternate aerodrome for a given flight.

**Runway visual range (RVR).** The range over which the pilot of an aircraft on the centre line of a runway can see the runway surface markings or the lights delineating the runway or identifying its centre line.

**State of the Aerodrome.** The State in whose territory the aerodrome is located.

**Specific approval.** An approval which is documented in the operations specifications for commercial air transport operations or in the list of specific approvals for general aviation operations.

**Synthetic vision system (SVS).** A system to display data-derived synthetic images of the external scene from the perspective of the flight deck.

**Table of Contents**

Corrigendum of Amendments .....	2
Acronyms .....	3
Definitions .....	5
<b>Table of Contents</b> .....	8
Foreword .....	13
PART-I (AEROPLANE) .....	14
SUBPART A – APPLICABILITY .....	14
CAR OPS 2.001 Applicability .....	14
CAR OPS 2.002 Operating rules .....	14
CAR OPS 2.003 Terminology .....	14
CAR OPS 2.004 Operations of performance class B aeroplanes .....	15
SUBPART B — GENERAL .....	18
CAR OPS 2.005 Compliance with laws, regulations and procedures .....	18
CAR OPS 2.006 Dangerous goods .....	18
CAR OPS 2.007 Use of psychoactive substances .....	19
CAR OPS 2.008 Specific Approvals .....	19
CAR OPS 2.009 Protection of Safety Data and Safety Information .....	20
CAR OPS 2.010 Aeroplane operated under an Article 83 <i>bis</i> agreement .....	21
SUBPART C — FLIGHT OPERATIONS .....	22
CAR OPS 2.011 Operating Facilities .....	22
CAR OPS 2.012 Taxying of Aeroplanes .....	22
CAR OPS 2.013 Aerodrome Operating Minima .....	22
CAR OPS 2.014 Passengers .....	25
CAR OPS 2.015 Flight preparation .....	26
CAR OPS 2.016 Flight planning .....	26
CAR OPS 2.017 Meteorological Conditions .....	27
CAR OPS 2.018 Destination Alternate Aerodromes .....	28
CAR OPS 2.019 Fuel and Oil requirements .....	28
CAR OPS 2.020 Refuelling with Passengers on Board .....	29
CAR OPS 2.021 Oxygen Supply .....	30
CAR OPS 2.022 Aerodrome operating minima .....	30
CAR OPS 2.023 Meteorological and operational observations by pilots .....	31
CAR OPS 2.024 Hazardous Flight Conditions .....	31
CAR OPS 2.025 Aeroplane operating procedures for landing performance .....	31
CAR OPS 2.026 Flight Crew Members at Duty Stations .....	31
CAR OPS 2.027 Use of Oxygen .....	32
CAR OPS 2.028 In-flight Fuel Management .....	32



CAR OPS 2.029 Instrument Approach Procedures .....	33
CAR OPS 2.030 Duties of Pilot-in-Command .....	34
CAR OPS 2.031 Cabin Baggage (Take-off and Landing) .....	35
CAR OPS 2.031A Flight Operations Officer/Flight Dispatcher .....	35
SUBPART D – AEROPLANE PERFORMANCE OPERATING LIMITATIONS .....	36
CAR OPS 2.032 General.....	36
SUBPART E – INSTRUMENTS, EQUIPMENT AND FLIGHT DOCUMENTS .....	37
CAR OPS 2.033 General.....	37
CAR OPS 2.034 Aeroplanes on all flights.....	37
CAR OPS 2.035 Marking of break-in points.....	39
CAR OPS 2.036 All aeroplanes operated as Day VFR .....	39
CAR OPS 2.037 Instruments and equipment - Night VFR.....	40
CAR OPS 2.038 Operating Lights for Night Operations .....	40
CAR OPS 2.039 Instruments and Equipment - IFR.....	41
CAR OPS 2.040 Landplanes Flight Over Water.....	41
CAR OPS 2.041 Aeroplanes on Extended Flights Over Water .....	42
CAR OPS 2.042 Aeroplanes on Flights Over Designated Land Areas.....	43
CAR OPS 2.042A Mach number indicator .....	43
CAR OPS 2.043 Supplemental Oxygen — Pressurised Aeroplane .....	43
CAR OPS 2.044 Supplemental Oxygen — Non-Pressurised Aeroplane .....	44
CAR OPS 2.045 Noise Certification.....	44
CAR OPS 2.046 Emergency locator transmitter (ELT) .....	44
CAR OPS 2.047 Pressure-Altitude Reporting Transponder .....	45
CAR OPS 2.048 Microphones .....	45
CAR OPS 2.049 [Aeroplane equipped with ALS, HUD or Equivalent Displays, EVS, SVS and/or CVS.....	45
CAR OPS 2.050 Ground proximity warning systems (GPWS) .....	45
CAR OPS 2.051 Electronic Flight Bags (EFB) .....	46
CAR OPS 2.052 Documents to be Carried .....	47
Appendix 1 to CAR OPS 2.038 .....	48
SUBPART F – COMMUNICATION, NAVIGATION AND SURVEILLANCE EQUIPMENT .....	53
CAR OPS 2.053 Communication equipment .....	53
CAR OPS 2.054 Navigation equipment.....	54
CAR OPS 2.055 Performance Based Navigation.....	55
CAR OPS 2.056 NAT HLA .....	56
CAR OPS 2.057 RVSM.....	56
CAR OPS 2.058 Surveillance Equipment.....	57
Appendix 1 to OPS 2.057 Altimetry System Performance Requirements for Operations In RVSM Airspace .....	58
SUBPART G – MAINTENANCE .....	60
CAR OPS 2.059 Owner’s maintenance responsibilities .....	60

CAR OPS 2.060 Continuing airworthiness records .....	60
CAR OPS 2.061 Modifications and repairs .....	61
CAR OPS 2.062 Maintenance release.....	61
SUBPART H – FLIGHT CREW .....	63
CAR OPS 2.063 Composition of the flight crew.....	63
CAR OPS 2.064 Qualifications .....	63
SUBPART I – MANUALS LOGS & RECORDS.....	64
CAR OPS 2.065 Flight manual.....	64
CAR OPS 2.066 Journey log book .....	64
CAR OPS 2.067 Records of emergency and survival equipment carried.....	64
SUBPART J – SECURITY .....	65
CAR OPS 2.068 Security of aeroplane .....	65
CAR OPS 2.069 Reporting acts of unlawful interference .....	65
PART II – LARGE AND TURBOJET AEROPLANES.....	66
SUBPART A – APPLICABILITY .....	66
CAR OPS 2.070 Applicability.....	66
CAR OPS 2.071 Leasing and Interchange .....	66
CAR OPS 2.072 Fractional Ownership Operations .....	68
SUBPART B - GENERAL .....	69
CAR OPS 2.073 Compliance with Laws, Regulations and Procedures .....	69
CAR OPS 2.074 Safety Management System .....	69
Appendix 1 to CAR OPS 2.074.....	70
Appendix 2 to CAR OPS 2.074.....	73
SUBPART C - FLIGHT OPERATIONS .....	76
OPERATIONAL MANAGEMENT (BEFORE FLIGHT) .....	76
CAR OPS 2.075 Operating facilities .....	76
CAR OPS 2.076 Operator notification .....	76
CAR OPS 2.077 Operations manual.....	76
CAR OPS 2.078 Operating instructions — general .....	77
CAR OPS 2.079 In-flight simulation of emergency situations.....	77
CAR OPS 2.080 Checklists.....	77
CAR OPS 2.081 Minimum flight altitudes.....	77
CAR OPS 2.082 Fatigue management programme .....	77
CAR OPS 2.083 Operational flight planning .....	78
CAR OPS 2.084 Take-off Alternate Aerodromes .....	78
CAR OPS 2.085 Fuel requirements .....	78
CAR OPS 2.086 Refuelling with Passengers on Board .....	80
CAR OPS 2.087 Oxygen Supply.....	81
IN-FLIGHT PROCEDURES .....	81

CAR OPS 2.088 Use of Oxygen .....	81
CAR OPS 2.089 Flight Recorder Operation.....	82
CAR OPS 2.090 Procedure for Rate of Climb or Descent .....	82
CAR OPS 2.091 Operating Procedures for Landing Performance .....	82
CAR OPS 2.092 Duties of Pilot-in-Command.....	82
CAR OPS 2.093 In-flight Fuel Management.....	83
CAR OPS 2.093A Cabin baggage (take-off and landing) .....	83
Appendix 1 to CAR OPS 2.077 Content of an Operations Manual.....	83
(See CAR OPS 2.077) .....	83
SUBPART D – PERFORMANCE OPERATING LIMITATIONS .....	85
CAR OPS 2.094 Aeroplanes .....	85
CAR OPS 2.095 Mass limitations .....	85
CAR OPS 2.096 Take-off.....	86
CAR OPS 2.097 En-route — One Engine Inoperative .....	86
CAR OPS 2.098 Landing.....	86
SUBPART E – INSTRUMENTS, EQUIPMENT AND FLIGHT DOCUMENTS.....	87
CAR OPS 2.099 General.....	87
CAR OPS 2.100 Aeroplanes on all Flights .....	87
CAR OPS 2.101 Manuals and Checklists .....	88
CAR OPS 2.102 Cockpit Voice Recorder .....	88
CAR OPS 2.103 Flight Data Recorder .....	89
CAR OPS 2.104 Data Link Recording .....	90
CAR OPS 2.105 Flight Data and Cockpit Voice Combination Recorder .....	90
CAR OPS 2.106 Long-Range Over-Water Flights .....	91
CAR OPS 2.107 Icing Conditions.....	91
CAR OPS 2.108 Operations in Accordance with the Instrument Flight Rules .....	91
CAR OPS 2.109 Emergency Power Supply for Electrically Operated Attitude Indicating Instruments.....	91
CAR OPS 2.110 Weather-detecting Equipment .....	92
CAR OPS 2.111 Operations above 15000 m (49000 ft) - Radiation Indicator.....	92
CAR OPS 2.112 Passenger and Cabin Crew Seats.....	92
CAR OPS 2.113 Airborne Collision Avoidance System (ACAS) .....	93
CAR OPS 2.114 Pressure-altitude Reporting Transponder.....	93
CAR OPS 2.114A Microphones .....	93
CAR OPS 2.115 Ground Proximity Warning Systems (GPWS) .....	93
Appendix 1 to CAR OPS 2.102.....	94
Appendix 1 to CAR OPS 2.102 to CAR OPS 2.104 Inclusive .....	95
Appendix 2 to CAR OPS 2.102 to CAR OPS 2.104 Inclusive .....	97
Appendix 1 to CAR OPS 2.103.....	98
Appendix 2 to CAR OPS 2.103.....	100

Appendix 1 to CAR OPS 2.104 .....	100
Appendix 1 to CAR OPS 2.103 .....	102
Appendix 2 to CAR OPS 2.103 .....	109
SUBPART F – COMMUNICATION AND NAVIGATION EQUIPMENT .....	114
CAR OPS 2.116 Communication equipment .....	114
CAR OPS 2.117 Installation.....	114
CAR OPS 2.118 Electronic Navigation Data Management .....	114
SUBPART G – MAINTENANCE.....	115
CAR OPS 2.119 Operator’s Maintenance Responsibilities .....	115
CAR OPS 2.120 Maintenance Programme .....	115
CAR OPS 2.121 Continuing Airworthiness Information.....	115
CAR OPS 2.122 Maintenance Release.....	115
SUBPART H – FLIGHT CREW .....	116
CAR OPS 2.123 Composition of the Flight Crew.....	116
CAR OPS 2.124 Flight Crew Member Emergency Duties.....	116
CAR OPS 2.125 Flight Crew Member Training Programmes .....	116
CAR OPS 2.126 Qualifications .....	117
CAR OPS 2.126A Flight Operations Officer/Flight Dispatcher .....	118
SUBPART I – MANUALS, LOGS AND RECORDS .....	119
CAR OPS 2.127 Maintenance Programme .....	119
CAR OPS 2.128 Technical log.....	119
CAR OPS 2.128A Flight recorder records .....	119
SUBPART J - SECURITY.....	120
CAR OPS 2.129 Security programme.....	120
CAR OPS 2.130 Flight Crew Compartment Security .....	120
SUBPART K – CABIN CREW .....	121
CAR OPS 2.131 Assignment of Emergency Duties.....	121
CAR OPS 2.132 Cabin Crew at Emergency Evacuation Stations .....	121
CAR OPS 2.133 Protection of Cabin Crew During Flight.....	121
CAR OPS 2.134 Training .....	121
ATTACHMENT 1. A MINIMUM EQUIPMENT LIST (MEL).....	122

**Foreword**

- (a) Enforcement Procedures ensuring compliance against Civil Aviation Regulations (CAR-12) which has been issued by the Civil Aviation Authority of Oman (hereinafter referred as CAA or “the Authority”) under the provisions of the Civil Aviation Law of the Sultanate of Oman.
- (b) This CAR has been modelled upon similar regulations implemented by other member states and includes the subject matter endorsed within ICAO Annexes and the relevant ICAO Docs.
- (c) CAR OPS-2 prescribes the requirements for:
  - (1) The establishing, implementation, and the maintaining of compliance requirements for General Aviation Operators (Aeroplane).
  - (2) The applicable punitive actions that can and will be enforced by the Authority against recognised actions of non-compliance.
- (d) Amendments to the text in CAR OPS-2 in revised editions are issued as a complete amendment of pages contained within. For additional guidance refer to relevant guidance material in CAR OPS 1.
- (e) The editing practices used in this document are as follows:
  - (1) ‘Shall’ is used to indicate a mandatory requirement and may appear in CARs.
  - (2) ‘Should’ is used to indicate a recommendation
  - (3) ‘May’ is used to indicate discretion by the Authority, or the industry as appropriate.
  - (4) ‘Will’ indicates a mandatory requirement and is used to advise of action incumbent on the Authority.

***Note: The use of the male gender implies the female gender and vice versa.***

**PART-I (AEROPLANE)****SUBPART A – APPLICABILITY****CAR OPS 2.001 Applicability**

- (a) CAR-OPS 2 prescribes requirements for the purpose of general aviation operator (aeroplane) by any operator whose principal place of business is in the Sultanate of Oman, and is applicable to the operation of:
- (1) All international general aviation aeroplane operations, including those covered in part II general aviation operation (Aeroplane)
  - (2) Any civil aeroplane, registered in the Sultanate of Oman, having a maximum take-off mass of 5,700 kg. or more; and
  - (3) Any civil aeroplane, registered in the Sultanate of Oman, having a seating configuration of 10 or more seats, excluding any required flight crew member seat; and
  - (4) Any turbine powered pressurized aeroplane, registered in the Sultanate of Oman.
- (b) This CAR OPS-2, Rev.4 shall enter into force, as effective, from the day of its publication and shall become applicable on 26th November 2024.

**CAR OPS 2.002 Operating rules**

The holder of a general aviation aeroplane operating certificate shall comply with the requirements of CAR 180, unless otherwise specified in this CAR.

**CAR OPS 2.003 Terminology**

The purpose of this CAR General Aviation means:

- (a) An aeroplane operation other than:
- (1) a commercial air transport operation,
  - (2) an aerial work operation
  - (3) an agricultural operation.
- (b) Exemptions

The Authority may exceptionally grant an exemption from the provisions of CAR OPS 2 when satisfied

that there is a need and subject to compliance with any supplementary condition the Authority considers necessary in order to ensure an acceptable level of safety in the particular case.

**CAR OPS 2.004 Operations of performance class B aeroplanes.****(a) Additional information and forms to be carried:**

- (1) For A to A VFR operations of single engine aeroplanes by day, the following documents need not be carried:
  - (i) Operational Flight Plan;
  - (ii) Aeroplane Technical Log;
  - (iii) NOTAM/AIS briefing documentation;
  - (iv) Meteorological Information;
  - (v) Notification of special categories of passengers and;
  - (vi) Notification of special loads including dangerous goods.
- (2) For A to B VFR operations of single engine aeroplanes by day. Notification of special categories as security personnel, if not considered as crew, handicapped persons, inadmissible passengers, deportees and persons in custody.
- (3) For A to B VFR operations by day, the Operational Flight Plan may be in a simplified form and must meet the needs of the type of operation.

**(b) Use of Air Traffic**

For VFR operations of single engine aeroplanes by day, non-mandatory contact with ATS shall be maintained to the extent appropriate to the nature of the operation. Search and rescue services must be ensured in accordance with CAR OPS-1.300

**(c) Aerodrome Operating Minima:**

For VFR operations, the standard VFR operating minima will normally cover this requirement. Where necessary, the operator shall specify additional requirements considering such factors as radio coverage, terrain, nature of sites for take-off and landing, flight conditions and ATS capacity.

**(d) Noise abatement procedures:**

Not applicable to VFR operations of single engine aeroplanes.

**(e) Routes and Areas of Operation:**

Take-off and landing are made at the same place is not applicable to A to A VFR operations of single

engine aeroplanes by day

(f) Establishment of minimum flight altitudes:

For VFR operations by day, this requirement is applicable as follows. An operator shall ensure that operations are only conducted along such routes or within such areas for which a safe terrain clearance can be maintained and shall take account of such factors as temperature, terrain, unfavorable meteorological conditions (e.g. severe turbulence and descending air currents, corrections for temperature and pressure variations from standard values).

(g) Fuel Policy

(1) For A to A Flights - An operator shall specify the minimum fuel contents at which a flight must end. This minimum, final reserve, fuel must not be less than the amount needed to fly for a period of 45 minutes.

(2) For A to B Flights – An operator shall ensure that the pre-flight calculation of usable fuel required for a flight includes;

(i) Taxi fuel - Fuel consumed before take-off, if significant; and

(ii) Trip fuel (Fuel to reach the destination); and

(iii) Reserve fuel -

a. Contingency fuel -Fuel that is not less than 5% of the planned trip fuel or, in the event of in-flight re-planning, 5% of the trip fuel for the remainder of the flight; and

b. Final reserve fuel - Fuel to fly for an additional period of 45 minutes (piston engines) or 30 minutes (turbine engines); and

(iv) (D) Alternate fuel - Fuel to reach the destination alternate via the destination, if a destination alternate is required

(v) (E) Extra fuel – Fuel that the commander may require in addition to that required under subparagraphs (A) – (D) above.

(h) Flight Preparation:

(1) Operational Flight Plan for A to A operation - Not Required.

(2) A to B operations under VFR by day - An operator shall ensure that a simplified form of an operational flight plan which is relevant to the type of operation is completed for each flight.

(i) Selection of aerodrome:

Not applicable to VFR operations. An operator shall only authorise use of aerodromes that are adequate



for the type(s) of aeroplane and operation(s) concerned.

- (1) When defining aerodromes for the type of aeroplane(s) and operation(s) concerned, an operator should take account of the following:
  - (i) An adequate aerodrome is an aerodrome which the operator considers to be satisfactory, taking account of the applicable performance requirements and runway characteristics. In addition, it should be anticipated that, at the expected time of use, the aerodrome will be available and equipped with necessary ancillary services, such as ATS, sufficient lighting, communications, weather reporting, nav aids and emergency services / Rescue and Fire Fighting Services.
  - (ii) For an ETOPS en-route alternate aerodrome, the following additional points should be considered:
    - a. The availability of an ATC facility; and
    - b. The availability of at least one letdown aid (ground radar would so qualify) for an instrument approach.
- (j) Commencement and continuation of approach: Not applicable to VFR operations.
- k) Operating procedures- threshold crossing height: Not applicable to VFR operations.

**SUBPART B — GENERAL****CAR OPS 2.005 Compliance with laws, regulations and procedures**

- (a) The pilot-in-command shall comply with the laws, regulations and procedures of those States in which operations are conducted.
- (b) The pilot-in-command shall be familiar with the laws, regulations and procedures, pertinent to the performance of his or her duties, prescribed for the areas to be traversed, the aerodromes to be used and the air navigation facilities relating thereto. The pilot-in-command shall ensure that other members of the flight crew are familiar with such of these laws, regulations and procedures as are pertinent to the performance of their respective duties in the operation of the aeroplane.
- (c) The pilot-in-command shall have responsibility for operational control.
- (d) If an emergency situation which endangers the safety or security of the aeroplane or persons necessitates the taking of action which involves a violation of local regulations or procedures, the pilot-in-command shall notify the appropriate local authority without delay. If required by the State in which the incident occurs, the pilot-in-command shall submit a report on any such violation to the appropriate authority of such State; in that event, the pilot-in-command shall also submit a copy of it to the Authority, as the State of Registry of the aeroplane. Such reports shall be submitted as soon as possible and normally within ten days.
- (e) The pilot-in-command shall ensure that flight crew members demonstrate the ability to speak and understand the English language.

Note - The pilot-in-command should have available on board the aeroplane the essential information concerning the search and rescue services in the area over which the aeroplane will be flown.

**CAR OPS 2.006 Dangerous goods**

- (a) The transport of dangerous goods by air shall be conducted in accordance with CAR-92 (Dangerous Goods) as last amended and amplified by the Technical Instructions for the Safe Transport of Dangerous Goods by Air.
- (b) Dangerous goods shall only be transported by the operator approved by the Authority except when;
  - (1) they are not subject to the Technical Instructions in accordance with Part 1 of those Instructions;  
or
  - (2) they are carried by passengers or the pilot-in-command, or are in baggage, in accordance with Part 8 of the Technical Instructions.

- (c) The pilot-in-command shall take all reasonable measures to prevent dangerous goods from being carried on board inadvertently.
- (d) The pilot-in-command shall, in accordance with the Technical Instructions, report without delay to the Authority and the appropriate authority of the State of occurrence in the event of any dangerous goods accidents or incidents.
- (e) The pilot-in-command shall ensure that passengers are provided with information about dangerous goods in accordance with the Technical Instructions.

Note 1.— Provisions for carriage of dangerous goods are contained in Annex 18. Note 2.— Article 35 of the Convention refers to certain classes of cargo restrictions

#### **CAR OPS 2.007 Use of psychoactive substances**

*Note: Refer to CAR 99 Drugs and Alcohol Management Plan (DAMP)*

#### **CAR OPS 2.008 Specific Approvals**

- (a) The operator shall not operate an aeroplane for the purpose of General Aviation operations otherwise than under, and in accordance with, the approvals and limitations of a Specific Approval issued for that aeroplane.
- (b) The pilot-in-command shall not conduct operations for which a specific approval is required unless such approval has been issued by the Authority.
- (c) Specific approvals shall follow the layout listed in ICAO Annex 6 Part II and contain the information on the following required approvals;
  - (1) Low Visibility Operations;
  - (2) [Operational credit operations for advanced aircraft, when used for low visibility operations;]
  - (3) Performance Based Operations (PBN);
  - (4) Carriage of Dangerous Goods;
  - (5) RVSM;
  - (6) NAT HLA;
  - (7) Use of EFB (installed or portable);

- (8) Use of CPDLC;
- (9) Use of ADS-B Out;
- (10) Use of ADS C;
- (11) Steep Approaches;
- (12) Required Communications Performance (RCP);
- (13) Required Surveillance Performance (RSP); and
- (14) Fractional Ownership management operations.

**CAR OPS 2.009 Protection of Safety Data and Safety Information**

- (a) The Authority shall not allow the use of recordings or transcripts of CVR, CARS, Class A AIR and Class A AIRS for purposes other than the investigation of an accident or incident as per ICAO Annex 13, except where the recordings or transcripts are:
  - (1) related to a safety-related event identified in the context of a safety management system; are restricted to the relevant portions of a de-identified transcript of the recording; and are subject to the protections accorded by Appendix 2 to CAR OPS 2.074;
- (b) Sought for use in criminal proceedings not related to an event involving an accident or incident investigation and are subject to the protections accorded by Appendix 2 to CAR OPS 2.074; or used for inspections of flight recorder systems. (B) The Authority shall not allow the use of recordings or transcripts of FDR, ADRS, Class B and C AIR, and Class B and C AIRS for purposes other than the investigation of an accident or incident as per ICAO Annex 13, except where the recordings or transcripts are subject to the protections accorded by Appendix 2 to CAR OPS 2.074 and are:
  - (1) used by the operator for airworthiness or maintenance purposes;
  - (2) sought for use in proceedings not related to an event involving an accident or incident investigation;
  - (3) de-identified; or
  - (4) disclosed under secure procedures.

*Note 1: When an investigation under Annex 13 is instituted, investigation records are subject to the protections accorded by Annex 13.*

*Note 2: Provisions on the protection of safety data, safety information and related sources are contained in Appendix 2 to CAR OPS 2.074.*

**CAR OPS 2.010 Aeroplane operated under an Article 83 *bis* agreement**

- (a) An aeroplane, when operating under an Article 83 *bis* agreement entered into between the State of Registry and the State of the principal location of a general aviation operator, shall carry a certified true copy of the agreement summary, in either an electronic or hard copy format. When the summary is issued in a language other than English, an English translation shall be included.
- (b) The agreement summary of an Article 83 *bis* agreement shall be accessible to a civil aviation safety inspector to determine which functions and duties are transferred under the agreement by the State of Registry to the State of the principal location of a general aviation operator, when conducting surveillance activities such as ramp checks.
- (c) The agreement summary shall be transmitted to ICAO together with the Article 83 *bis* Agreement for registration with the ICAO Council by the State of Registry or the State of the principal location of a general aviation operator.

*Note: The agreement summary transmitted with the Article 83 bis agreement registered with the ICAO Council contains the list of all aircraft affected by the agreement. However, the certified true copy to be carried on board will need to list only the specific aircraft carrying the copy.*

- (d) Recommendation. The agreement summary should contain the information in ICAO 6, Part II, Appendix 2.5 for the specific aircraft and should follow the layout of Appendix 2.5, paragraph 2.

**SUBPART C — FLIGHT OPERATIONS****Operational Management (Before Flight)****CAR OPS 2.011 Operating Facilities**

The pilot-in-command shall not commence a flight unless it has been ascertained by every reasonable means available that the ground and/or water facilities including communication facilities and navigation aids available and directly required on such flight, for the safe operation of the aeroplane, are adequate for the type of operation under which the flight is to be conducted.

*Note 1: “Reasonable means” in this Standard is intended to denote the use, at the point of departure, of information available to the pilot-in-command either through official information published by the aeronautical information services or readily obtainable from other sources.*

*Note 2: The pilot-in-command, in making a decision on the adequacy of facilities and services available at an aerodrome of intended operation, should assess the level of safety risk associated with the aircraft type and nature of the operation, in relation to the availability of rescue and fire-fighting services (RFFS).*

**CAR OPS 2.012 Taxying of Aeroplanes**

- (a) An aeroplane shall not be taxied on the movement area of an aerodrome unless the person at the controls is an appropriately qualified pilot or;
- (1) has been duly Authorised by the owner or in the case where it is leased the lessee, or a designated agent;
  - (2) is fully competent to taxi the aeroplane;
  - (3) is qualified to use the radio if radio communications are required; and
  - (4) has received instruction from a competent person in respect of aerodrome layout, and where appropriate, information on routes, signs, marking, lights, ATC signals and instructions, phraseology and procedures, and is able to conform to the operational standards required for safe movement at the aerodrome.

**CAR OPS 2.013 Aerodrome Operating Minima**

- (a) The pilot-in-command shall establish aerodrome operating minima in accordance with criteria specified by the Authority, as State of Registry, for each aerodrome to be used in operations. When establishing aerodrome operating minima, any conditions that may be prescribed in the list of specific approvals shall

be observed. Such minima shall not be lower than any that may be established for such aerodromes by the State of the Aerodrome, except when specifically approved by that State.

- (b) The Authority, as the State of Registry, shall authorise operational credit(s) for operations with advanced aircraft. Or/ and aeroplanes equipped with HUD or equivalent displays, EVS, SVS or CVS. Where the operational credit relates to low visibility operations, the Authority, as the State of Registry, shall issue a specific approval. Such authorisations shall not affect the classification of the instrument approach procedure.

*Note 1: Operational credit includes:*

- (1) for the purposes of an approach ban under CAR OPS 2.023 or dispatch considerations, a minimum below the aerodrome operating minima;*
- (2) reducing or satisfying the visibility requirements; or*
- (3) requiring fewer ground facilities as compensated for by airborne capabilities.*

*Note 2.— Guidance on operational credit for aircraft equipped with a HUD or equivalent displays, EVS, SVS and CVS is contained in Attachment 2.B and in the Manual of All-Weather Operations (Doc 9365).*

*Note 3.— Information regarding a HUD or equivalent displays, including references to RTCA and EUROCAE documents, is contained in the Manual of All-Weather Operations (Doc 9365).*

- (c) When issuing a specific approval for the operational credit, the Authority, as the State of Registry shall ensure that the;
- (1) the aeroplane meets the appropriate airworthiness certification requirements;
  - (2) the information necessary to support effective crew tasks for the operation is appropriately available to both pilots where the number of flight crew members specified in the operations manual is more than one;
  - (3) the operator/owner has carried out a safety risk assessment of the operations supported by the equipment;
  - (4) the operator/owner has established and documented normal and abnormal procedures and MEL;
  - (5) the operator/owner has established a training programme for the flight crew members and relevant personnel involved in the flight preparation;
  - (6) the operator/owner has established a system for data collection, evaluation and trend monitoring for low visibility operations for which there is an operational credit; and
  - (7) the operator has instituted appropriate procedures in respect of continuing airworthiness (maintenance and repair) practices and programmes.

- (d) For operations with operational credit with minima above those related to low visibility operations, the Authority, as the State of the Operator shall establish criteria for the safe operation of the aeroplane.
- (e) Instrument approach operations shall be classified based on the designed lowest operating minima below which an approach operation shall only be continued with the required visual reference as follows:
  - (1) Type A: a minimum descent height or decision height at or above 75 m (250 ft); and
  - (2) Type B: a decision height below 75 m (250 ft). Type B instrument approach operations are categorized as:
    - (i) Category I (CAT I): a decision height not lower than 60 m (200 ft) and with either a visibility not less than 800 m or a runway visual range not less than 550 m;
    - (ii) Category II (CAT II): a decision height lower than 60 m (200 ft), but not lower than 30 m (100 ft) and a runway visual range not less than 300 m;
    - (iii) Category III: a decision height lower than 100 ft (30 m) or no decision height and a runway visual range less than 300 m or no runway visual range limitation. These are;
      - a. Category IIIA (CAT IIIA): a decision height lower than 30 m (100 ft) or no decision height and a runway visual range not less than 175 m;
      - b. Category IIIB (CAT IIIB): a decision height lower than 15 m (50 ft), or no decision height and a runway visual range less than 175 m but not less than 50 m; and
      - c. Category IIIC (CAT IIIC): no decision height and no runway visual range limitations.

*Note 1 - Where decision height (DH) and runway visual range (RVR) fall into different categories of operation, the instrument approach operation would be conducted in accordance with the requirements of the most demanding category (e.g. an operation with a DH in the range of CAT IIIA but with an RVR in the range of CAT IIIB would be considered a CAT IIIB operation or an operation with a DH in the range of CAT II but with an RVR in the range of CAT I would be considered a CAT II operation). This does not apply if the RVR and/or DH has been approved as operational credit.*

*Note 2 - The required visual reference means that section of the visual aids or of the approach area which should have been in view for sufficient time for the pilot to have made an assessment of the aeroplane position and rate of change of position, in relation to the desired flight path. In the case of a circling approach operation the required visual reference is the runway environment.*



- d. The operating minima for 2D instrument approach operations using instrument approach procedures shall be determined by establishing a minimum descent altitude (MDA) or minimum descent height (MDH), minimum visibility and, if necessary, cloud conditions.
- e. The operating minima for 3D instrument approach operations using instrument approach procedures shall be determined by establishing a decision altitude (DA) or decision height (DH) and the minimum visibility or RVR.
- f. The Authority shall issue a specific approval for instrument approach operations in low visibility which shall only be conducted when RVR information is provided.
- g. For take-off in low visibility, the Authority shall issue a specific approval for the minimum take-off RVR.
- h. The pilot-in-command shall not operate to or from an aerodrome using operating minima lower than those which may be established for that aerodrome by the State in which it is located, except with the specific approval of that State

**CAR OPS 2.014 Passengers**

- (a) The operator, and pilot-in-command, shall ensure that passengers are made familiar with the location and use of:
  - (1) seat belts;
  - (2) emergency exits;
  - (3) life jackets, if the carriage of life jackets is prescribed;
  - (4) oxygen dispensing equipment if the use of oxygen is anticipated; and
  - (5) other emergency equipment provided for individual use, including passenger emergency briefing cards
- (b) The pilot-in-command shall ensure that all persons on board are aware of the location and general manner of use of the principal emergency equipment carried for collective use.
- (c) In an emergency during flight, the pilot-in-command shall ensure that passengers are instructed in such emergency action as may be appropriate to the circumstances.
- (d) The pilot-in-command shall ensure that, during take-off and landing and whenever considered necessary by reason of turbulence or any emergency occurring during flight, all passengers on board shall be secured in their seats by means of the seat belts or harnesses provided.

**CAR OPS 2.015 Flight preparation**

- (a) The pilot-in-command shall be responsible for the operation, safety and security of the aeroplane and the safety of all crew members, passengers and cargo on board
- (b) A flight shall not be commenced until the pilot-in-command is satisfied that:
  - (1) the aeroplane is airworthy, duly registered and that appropriate certificates with respect thereto are aboard the aeroplane;
  - (2) the instruments and equipment installed in the aeroplane are appropriate, taking into account the expected flight conditions;
  - (3) any necessary maintenance has been performed in accordance with Subpart G of this Part;
  - (4) the mass of the aeroplane and center of gravity location are such that the flight can be conducted safely, taking into account the flight conditions expected;
  - (5) any load carried is properly distributed and safely secured; and
  - (6) the aeroplane operating limitations, contained in the flight manual, or its equivalent, will not be exceeded.

*Note: The pilot-in-command should have sufficient information on climb performance with all engines operating to enable determination of the climb gradient that can be achieved during the departure phase for the existing take-off conditions and intended take-off technique.*

**CAR OPS 2.016 Flight planning**

- (a) Before commencing a flight, the pilot-in-command shall be familiar with all available meteorological information appropriate to the intended flight. Preparation for a flight away from the vicinity of the place of departure, and for every flight under the instrument flight rules, shall include:
  - (1) a study of available current weather reports and forecasts; and
  - (2) the planning of an alternative course of action to provide for the eventuality that the flight cannot be completed as planned, because of weather conditions.

*Note 1. — It is the practice in some States to declare, for flight planning purposes, higher minima for an aerodrome when nominated as an alternate, than for the same aerodrome when planned as that of intended landing.*

*Note 2.— The requirements for flight plans are contained in Annex 2 — Rules of the Air and the procedures relating to flight plans and associated services are contained in the Procedures for Air*

*Navigation Services — Air Traffic Management (PANS-ATM, Doc 4444).*

*Note 3.— Detailed guidance on the use of the FF-ICE services, including the use of a preliminary flight plan, can be found in the Manual on Flight and Flow — Information for a Collaborative Environment (FF-ICE) (Doc9965).*

### **CAR OPS 2.017 Meteorological Conditions**

- (a) The Authority has established criteria to be used for the estimated time of use of an aerodrome, including a margin of time; as follows;
  - (1) A flight to be conducted in accordance with VFR shall not be commenced unless current meteorological reports or a combination of current reports and forecasts indicate that the meteorological conditions along the route or that part of the route to be flown under the VFR will, at the appropriate time, be such as to enable compliance with these rules.
  - (2) A flight to be conducted in accordance with the instrument flight rules shall not:
    - (i). Take-off from the departure aerodrome unless the meteorological conditions, one hour before and ending one hour after the estimated time of arrival at the aerodrome, are at or above the aerodrome operating minima for that operation; and
    - (ii). Take-off or continue beyond the point of in-flight re-planning unless at the aerodrome of intended landing or at each alternate aerodrome to be selected, current meteorological reports or a combination of current reports and forecasts indicate that the meteorological conditions will be, one hour before and ending one hour after the estimated time of arrival at the aerodrome, at or above the aerodrome operating minima for that operation
- (b) A flight to be operated in known or expected icing conditions shall not be commenced unless the aeroplane is certificated and equipped to cope with such conditions.
- (c) A flight to be planned or expected to operate in suspected or known ground icing conditions shall not take off unless the aeroplane has been inspected for icing and, if necessary, has been given appropriate de-icing/anti-icing treatment. Accumulation of ice or other naturally occurring contaminants shall be removed so that the aeroplane is kept in an airworthy condition prior to take-off.

**CAR OPS 2.018 Destination Alternate Aerodromes**

- (a) the duration of the flight from the departure aerodrome, or from the point of in-flight re-planning, to the destination aerodrome is such that, taking into account all meteorological conditions and operational information relevant to the flight, at the estimated time of use, a reasonable certainty exists that;
  - (1) the approach and landing may be made under visual meteorological conditions; and
  - (2) separate runways are usable at the estimated time of use of the destination aerodrome with at least one runway having an operational instrument approach procedure; or
- (b) the aerodrome of intended landing is isolated; and
  - (1) a standard instrument approach procedure is prescribed for the aerodrome of intended landing;
  - (2) a point of no return has been determined; and
  - (3) a flight shall not be continued past the point of no return unless available current meteorological information indicates that the following meteorological conditions will exist at the estimated time of use:
    - (i) a cloud base of at least 300 m (1000 ft) above the minimum associated with the instrument approach procedure; and
    - (ii) visibility of at least 5.5 km (3NM) or of 4 km (2NM) more than the minimum associated with the instrument approach procedure.

*Note: Separate runways are two or more runways at the same aerodrome configured such that if one runway is closed, operations to the other runway(s) can be conducted*

**CAR OPS 2.019 Fuel and Oil requirements**

A flight shall not be commenced unless, taking into account both the meteorological conditions and any delays that are expected in flight, the aeroplane carries sufficient fuel and oil to ensure that it can safely complete the flight. The amount of fuel to be carried must permit:

- (a) for visual flight rules (VFR) flights:
  - (1) by day, to fly to the aerodrome of intended landing, and after that, have a final reserve fuel for at least 30 minutes at normal cruising altitude; or
  - (2) by night, to fly to the aerodrome of intended landing and thereafter have a final reserve fuel for at least 45 minutes at normal cruising altitude;

(b) for IFR flights:

- (1) when no destination alternate is required or when the flight is to an isolated aerodrome, to fly to the aerodrome of intended landing, and after that, have a final reserve fuel for at least 45 minutes at normal cruising altitude; or
- (2) when a destination alternate is required, to fly to the aerodrome of intended landing, then to an alternate aerodrome and after that, have a final reserve fuel for at least 45 minutes at normal cruising altitude.

(c) Contingencies

In computing the fuel required including to provide for contingency, the following shall be taken into consideration:

- (1) forecast meteorological conditions;
- (2) anticipated ATC routings and traffic delays;
- (3) procedures for loss of pressurisation or failure of one engine while en-route, where applicable; and
- (4) any other condition that may delay the landing of the aeroplane or increase fuel and/or oil consumption

*Note: Nothing shall preclude amendment of a flight plan in-flight, in order to re-plan the flight to another destination, provided that all requirements can be complied with from the point where the flight is re-planned*

#### **CAR OPS 2.020 Refuelling with Passengers on Board**

- (a) An aeroplane shall not be refuelled when passengers are embarking, on board or disembarking unless it is properly attended by qualified personnel ready to initiate and direct an evacuation of the aeroplane by the most practical and expeditious means available.
- (b) Two-way communications shall be maintained by the aeroplane's inter-communication system or other suitable means between the ground crew supervising the refueling/defueling and the qualified personnel on-board the aeroplane.
- (c) Passengers shall remain seated without seat belts fastened during these periods of operations; and
- (d) Emergency light shall be in the armed position.

Note: It is recommended that the window blinds are in the up position.

**CAR OPS 2.021 Oxygen Supply**

The pilot-in-command shall ensure that breathing oxygen is available to crew members and passengers in sufficient quantities for all flights at such altitudes where a lack of oxygen might result in impairment of the faculties of crew members or harmfully affect passengers

Note: Approximate altitudes in the Standard Atmosphere corresponding to the values of absolute pressure used are as follows:

Absolute pressure	Metres	Feet
700 hPa	3 000	10 000
620 hPa	4 000	13 000
376 hPa	7 600	25 000

***In-flight Procedures*****CAR OPS 2.022 Aerodrome operating minima**

- (a) A flight shall not be continued towards the aerodrome of intended landing, unless the latest available information indicates that at the expected time of arrival, a landing can be effected at that aerodrome or at least one destination alternate aerodrome, in compliance with the operating minima established.
- (b) An instrument approach shall not be continued below 300 m (1000 ft) above the aerodrome elevation or into the final approach segment unless the reported visibility or controlling RVR is at or above the aerodrome operating minimum.

*Note — Criteria for the final approach segment is contained in PANS-OPS (Doc 8168), Volume II.*

- (c) If, after entering the final approach segment, or after descending below 300 m (1000 ft) above the aerodrome elevation, the reported visibility or the touchdown RVR falls below the specified minimum, the approach may be continued to DA/H or MDA/H. In any case, an aeroplane shall not continue its approach-to-land beyond a point at which the limits of the aerodrome operating minima would be infringed.

*Note. — Controlling RVR means the reported values of one or more RVR reporting locations (touchdown, midpoint and stop-end) used to determine whether operating minima are or are not met. Where RVR is used, the controlling RVR is the touchdown RVR, unless otherwise specified by State criteria.*

- (d) information available, the aeroplane performance information indicates that a safe landing can be made.

**CAR OPS 2.023 Meteorological and operational observations by pilots**

When weather conditions likely to affect the safety of other aeroplanes are encountered, they should be reported as soon as possible.

*Note: The pilot-in-command should report runway braking action when the runway braking action encountered is not as good as reported*

**CAR OPS 2.024 Hazardous Flight Conditions**

Hazardous flight conditions encountered, other than meteorological conditions, should be reported to the appropriate aeronautical station as soon as possible. The reports so rendered should give such details as may be pertinent to the safety of other aeroplanes.

**CAR OPS 2.025 Aeroplane operating procedures for landing performance**

An approach to land should not be continued below 300 m (1 000 ft) above aerodrome elevation unless the pilot-in-command is satisfied that, with the runway surface condition information available, the aeroplane performance information indicates that a safe landing can be made.

**CAR OPS 2.026 Flight Crew Members at Duty Stations**

(a) Take-off and landing.

All flight crew members required to be on flight deck duty shall be at their stations.

(b) En-route.

All flight crew members required to be on flight deck duty shall remain at their stations except when their absence is necessary for the performance of duties in connection with the operation of the aeroplane or for physiological needs.

(c) Seat belts.

All flight crew members shall keep their seat belts fastened when at their stations.

(d) Safety harness.

When safety harnesses are provided, any flight crew member occupying a pilot's seat shall keep the safety harness fastened during the take-off and landing phases; all other flight crew members shall keep their safety harnesses fastened during the take-off and landing phases unless the shoulder straps interfere with the performance of their duties, in which case the shoulder straps may be unfastened but

the seat belt must remain fastened.

*Note: Safety harness includes shoulder strap(s) and a seat belt which may be used independently*

### **CAR OPS 2.027 Use of Oxygen**

The pilot-in-command shall ensure that he/she and flight crew members engaged in performing duties essential to the safe operation of an aeroplane in flight use supplemental oxygen continuously whenever the cabin altitude exceeds 10000 ft for a period of more than 30 minutes and whenever the cabin altitude exceeds 13000 ft.

Safeguarding of cabin crew and passengers in pressurized aeroplanes in the event of loss of pressurization.

*Note 1: Cabin crew should be safeguarded so as to ensure reasonable probability of their retaining consciousness during any emergency descent which may be necessary in the event of loss of pressurization and, in addition, they should have such means of protection as will enable them to administer first aid to passengers during stabilized flight following the emergency. Passengers should be safeguarded by such devices or operational procedures as will ensure reasonable probability of their surviving the effects of hypoxia in the event of loss of pressurization.*

*Note2: It is not envisaged that cabin crew will always be able to provide assistance to passengers during emergency descent procedures which may be required in the event of loss of pressurization*

### **CAR OPS 2.028 In-flight Fuel Management**

- (a) The pilot-in-command shall monitor the amount of usable fuel remaining on board to ensure it is not less than the fuel required to proceed to an aerodrome where a safe landing can be made with the planned final reserve fuel remaining.

*Note: The protection of final reserve fuel is intended to ensure safe landing at any aerodrome when unforeseen occurrences may not permit a safe completion of an operation as originally planned*

- (b) The pilot-in-command shall advise ATC of a minimum fuel state by declaring MINIMUM FUEL when, having committed to land at a specific aerodrome, the pilot calculates that any change to the existing clearance to that aerodrome, or other air traffic delays, may result in landing with less than the planned final reserve fuel.

*Note: The declaration of MINIMUM FUEL informs ATC that all planned aerodrome options have been reduced to a specific aerodrome that no aerodrome is available, and any change to the existing clearance, or air traffic delays, may result in landing with less than the planned final reserve fuel. This is not an emergency situation but an indication that an emergency situation is possible should any additional delay occur.*



- (c) The pilot-in-command shall declare a situation of fuel emergency by broadcasting MAYDAY MAYDAY MAYDAY FUEL, when the calculated usable fuel estimated to be available upon landing at the nearest landing site where a safe landing can be made is less than the required final reserve fuel in compliance with CAR OPS 2.028.

*Note 1: The planned final reserve fuel is the minimum amount of fuel required upon landing. The declaration of MAYDAY MAYDAY MAYDAY FUEL informs ATC that all available landing options have been reduced to a specific aerodrome and a portion of the final reserve fuel may be consumed prior to landing.*

*Note 2: The pilot estimates with reasonable certainty that the fuel remaining upon landing at the nearest aerodrome will be less than the final reserve fuel taking into consideration the latest information available to the pilot, the area to be overflown, meteorological conditions and other reasonable contingencies.*

- (d) The use of fuel after flight commencement for purposes other than originally intended during pre-flight planning shall require a re-analysis and, if applicable, adjustment of the planned operation.

#### **CAR OPS 2.029 Instrument Approach Procedures**

- (a) One or more instrument approach procedures designed to support instrument approach operations shall be approved and promulgated by the State in which the aerodrome is located to serve each instrument runway or aerodrome utilized for instrument flight operations.
- (b) Aeroplane operated in accordance with the instrument flight rules shall comply with the instrument approach procedures approved by the State in which the aerodrome is located.

*Note 1.— See Annex 6 Part II; 2.2.2.2.1 for instrument approach operation classifications.*

*Note 2.— Information for pilots on flight procedure parameters and operational procedures is contained in PANS-OPS, Volume I. Criteria for the construction of visual and instrument flight procedures are contained in PANS-OPS, Volume II. Obstacle clearance criteria and procedures used in certain States may differ from PANS-OPS, and knowledge of these differences is important for safety reasons (see Annex 6 Part II; 2.1.1.1).*

**CAR OPS 2.030 Duties of Pilot-in-Command**

- (a) The pilot-in-command shall be responsible for the operation, safety and security of the aeroplane and the safety of all crew members, passengers and cargo on board.
- (b) The pilot-in-command shall be responsible for ensuring that a flight;
  - (1) will not be commenced if any flight crew member is incapacitated from performing duties by any cause such as injury, sickness, fatigue or the effects of any psychoactive substance;
  - (2) will not be continued beyond the nearest weather-permissible aerodrome or operating site when a flight crew member's capacity to perform functions is significantly reduced by impairment of faculties from causes such as fatigue, sickness or lack of oxygen;
- (c) The pilot-in-command shall be responsible for notifying the nearest appropriate authority by the quickest available means of any accident involving the aeroplane that results in serious injury or death of any person or substantial damage to the aeroplane or property.
- (d) When undue proximity to the ground is detected by the pilot-in-command or by a ground proximity warning system, the pilot-in-command shall take corrective action immediately in order to establish safe flight conditions.
- (e) The pilot-in-command of an aeroplane shall notify the operator and the Authority as soon as practicable, or within 72 hours, of any event which constitutes an occurrence as described below and which comes to that person's attention in the exercise of that person's functions
  - (1) any incident relating to such an aeroplane or any defect in or malfunctioning of such an aeroplane or any part or equipment of such an aeroplane, being an incident, malfunctioning or defect endangering, or which if not corrected would endanger, such an aeroplane or its occupants or any other person; or
  - (2) any defect in or malfunctioning of any facility on the ground used or intended to be used for purposes of or in connection with the operation of such an aeroplane, being a defect or malfunctioning endangering, or which if not corrected would endanger, such an aeroplane or its occupants; or
  - (3) any incident in flight in which the pilot-in-command of an aeroplane has reason to believe that the aeroplane has been in collision with one or more than one bird.

**CAR OPS 2.031 Cabin Baggage (Take-off and Landing)**

The pilot shall ensure that all baggage carried onto an aeroplane and taken into the passenger cabin is adequately and securely stowed.

**CAR OPS 2.031A Flight Operations Officer/Flight Dispatcher**

Should any person be assigned as a flight operations officer/flight dispatcher, the operator shall ensure that person is trained and maintains familiarisation with all features of the operation which are pertinent to their duties, including knowledge and skills related to Human Factors.

**SUBPART D – AEROPLANE PERFORMANCE OPERATING LIMITATIONS****CAR OPS 2.032 General**

An aeroplane shall be operated;

- (a) in compliance with the terms of its airworthiness certificate or equivalent approved document;
- (b) within the operating limitations prescribed by the certificating authority and the Authority, as the State of Registry; and
- (c) if applicable, within the mass limitations imposed by compliance with the applicable noise certification Standards in Annex 16, Volume I, unless otherwise authorised in exceptional circumstances for a certain aerodrome or a runway where there is no noise disturbance problem, by the competent authority of the State in which the aerodrome is situated.

*Note: Noise abatement procedures specified by the operator for any one aeroplane type should be the same for all aerodromes.*

- (d) Placards, listings, instrument markings, or combinations thereof, containing those operating limitations prescribed by the Authority, as the State of Registry for visual presentation, shall be displayed in the aeroplane.
- (e) The pilot-in-command shall determine that aeroplane performance will permit the take-off and departure to be carried out safely.

**SUBPART E – INSTRUMENTS, EQUIPMENT AND FLIGHT DOCUMENTS****CAR OPS 2.033 General**

In addition to the minimum equipment necessary for the issuance of a certificate of airworthiness, the instruments, equipment and flight documents prescribed in the following paragraphs shall be installed or carried, as appropriate, in aeroplane according to the aeroplane used and to the circumstances under which the flight is to be conducted. The prescribed instruments and equipment, including their installation, shall be acceptable to the Authority as the State of Registry.

**CAR OPS 2.034 Aeroplanes on all flights.**

An aeroplane shall be equipped with instruments which will enable the flight crew to control the flight path of the aeroplane, carry out any required procedural manoeuvres and observe the operating limitations of the aeroplane in the expected operating conditions. An aeroplane on all flights shall be equipped with, or carry on board;

- (a) an accessible first-aid kit (Refer to AMC OPS 1.745 to CAR OPS 1 for example of contents);
- (b) portable fire extinguishers of a type which, when discharged, will not cause dangerous contamination of the air within the aeroplane. At least one shall be located in:
  - (1) the pilot's compartment; and
  - (2) each passenger compartment that is separate from the pilot's compartment and not readily accessible to the pilot or co-pilot; and
  - (3) Any agent used in a built-in fire extinguisher for each lavatory disposal receptacle for towels, paper or waste in an aeroplane for which the individual certificate of airworthiness is first issued on or after 31 December 2011 and any extinguishing agent used in a portable fire extinguisher in an aeroplane for which the individual certificate of airworthiness is first issued on or after 31 December 2018 shall:
    - (i) meet the applicable requirements of the Authority as the State of Registry; and
    - (ii) not be of a type listed in the 1987 Montreal Protocol on Substances that Deplete the Ozone Layer as it appears in the Eighth Edition of the Handbook for the Montreal Protocol on Substances that Deplete the Ozone Layer, Annex A, Group II.

*Note 1: Aeroplanes on all flights should be equipped with the ground-air signal codes for search and rescue purposes.*

*Note 2: Aeroplanes on all flights should be equipped with a safety harness for each flight crew*

*member seat. 3 Safety harness includes shoulder strap(s) and a seat belt which may be used independently.*


*Note 3: Information concerning extinguishing agents is contained in the UNEP Halons Technical Options Committee Technical Note No. 1 — New Technology Halon Alternatives and FAA Report No. DOT/FAA/AR-99-63, Options to the Use of Halons for Aircraft Fire Suppression Systems.*

- (c)
  - (1) a seat or berth for each person who is aged 24 months or more; and
  - (2) a seat belt for each seat and restraining belts for each berth;
- (d) the following manuals, charts and information:
  - (1) the flight manual or other documents or information concerning any operating limitations prescribed for the aeroplane by the certificating authority of the State of Registry, required for the application of CAR OPS 2, Part I, Subpart C;
  - (2) any specific approval issued by the Authority under this CAR for the operation(s) to be conducted.
  - (3) current and suitable charts for the route of the proposed flight and all routes along which it is reasonable to expect that the flight may be diverted;
  - (4) procedures, as prescribed in CAR 180, for pilots-in-command of intercepted aeroplane;
  - (5) ground-air signal codes for search and rescue purposes;
  - (6) a list of visual signals for use by intercepting and intercepted aeroplane, as contained in CAR 180; and
  - (7) the journey log book for the aeroplane.
- (e) where the aeroplane is fitted with fuses that are accessible in flight, spare electrical fuses of appropriate ratings for replacement of those fuses.
- (f) A flight shall not be commenced when any of the aeroplane's instruments, items of equipment or
- (g) functions required for the intended flight are inoperative or missing, unless:
  - (1) the aeroplane is operated in accordance with the MEL, if established; or
  - (2) the aeroplane is subject to a permit to fly issued in accordance with the applicable airworthiness requirements.

**CAR OPS 2.035 Marking of break-in points**

- (a) If areas of the fuselage suitable for break-in by rescue crews in emergency are marked on an aeroplane such areas shall be marked as shown below (see figure following). The colour of the markings shall be red or yellow, and if necessary they shall be outlined in white to contrast with the background.
- (b) If the corner markings are more than 2 m apart, intermediate lines 9 cm x 3 cm shall be inserted so that there is no more than 2 m between adjacent markings.

*Note: This regulation does not require any aeroplane to have break-in areas.*

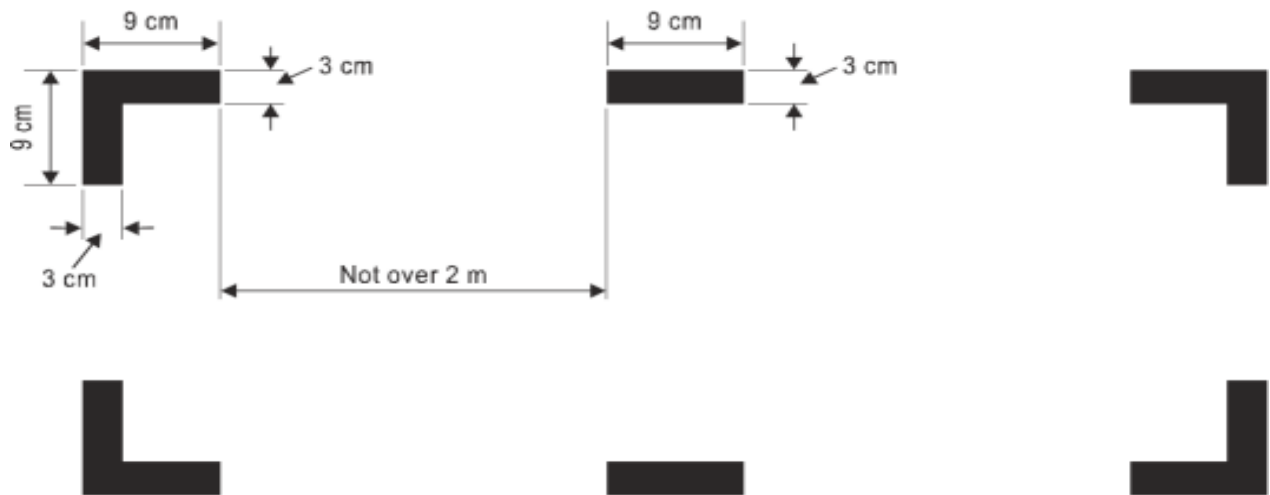**CAR OPS 2.036 All aeroplanes operated as Day VFR**

Aeroplane operated under VFR by day shall;

- (a) be equipped with a means of measuring and displaying the following;
- (1) magnetic heading,
  - (2) barometric altitude,
  - (3) indicated airspeed,
  - (4) Mach number, whenever speed limitations are expressed in terms of Mach number; and
  - (5) such additional equipment as may be prescribed by the Authority.
- (b) Equipped with, or shall carry, a means of measuring and displaying the time in hours, minutes and seconds.
- (c) VFR flights which are operated as controlled flights should be equipped in accordance with CAR OPS 2.039

**CAR OPS 2.037 Instruments and equipment - Night VFR**

Aeroplane operated under visual meteorological conditions (VMC) at night, or in conditions where the aeroplane cannot be maintained in a desired flight path without reference to one or more additional instruments shall be, in addition to CAR OPS 2.038, equipped with:

- (a) a means of measuring and displaying the following:
  - (1) turn and slip,
  - (2) attitude,
  - (3) vertical speed, and
  - (4) stabilised heading; and
  - (5) outside air temperature;
- (b) a means of indicating when the supply of power to the gyroscopic instruments is not adequate.
- (c) a means of preventing malfunction of the airspeed indicating system due to condensation or icing.

**CAR OPS 2.038 Operating Lights for Night Operations**

(See Appendix 1 to CAR OPS 2.038)

Aeroplane operated at night shall be equipped with;

- (a) the equipment specified in CAR OPS 2.039, and
- (b) the lights required by Appendix 1 to CAR OPS 2.038 for aircraft in flight or operating on the movement area of an aerodrome; and
- (c) an anti-collision light system;
- (d) navigation/position lights;
- (e) a landing light
- (f) lighting supplied from the aeroplane's electrical system to provide adequate illumination for all instruments and equipment essential to the safe operation of the aeroplane that are used by the flight crew;
- (g) lighting supplied from the aeroplane's electrical system to provide illumination in all passenger compartments;
- (h) an independent portable light for each crew member station.



**CAR OPS 2.039 Instruments and Equipment - IFR**

All aeroplanes when operated in accordance with the instrument flight rules, or when the aeroplane cannot be maintained in a desired attitude without reference to one or more flight instruments, shall be;

- (a) equipped with a means of measuring and displaying the following:
  - (1) magnetic heading (standby compass),
  - (2) barometric altitude,
  - (3) indicated airspeed, with a means of preventing malfunctioning due to either condensation or icing;
  - (4) rate of climb and descent,
  - (5) turn and slip,
  - (6) aeroplane attitude,
  - (7) stabilised aeroplane heading,
  - (8) a means of indicating on the flight deck the outside air temperature,
  - (9) Mach number, whenever speed limitations are expressed in terms of Mach number; and

*Note - The requirements of (5), (6) and (7) may be met by combinations of instruments or by integrated flight director systems provided that the safeguards against total failure, inherent in the three separate instruments, are retained.*

- (b) equipped with, or shall carry, a means of measuring and displaying the time in hours, minutes and seconds.
- (c) equipped with a means of indicating when the supply of power to the gyroscopic instruments is adequate; and
- (d) equipped with such additional instruments or equipment as may be prescribed by the Authority.

**CAR OPS 2.040 Landplanes Flight Over Water**

- (a) Single-engine landplanes;
  - (1) when flying over water beyond gliding distance from land; or
  - (2) when taking off or landing at an aerodrome or operating site where, in the opinion of the pilot-in-command, the take-off or approach path is so disposed over water that there would be a likelihood of a ditching;
  - (3) should be equipped with a life-jacket for each person on board, or equivalent individual floatation

device for each person on board that shall be worn or stowed in a position that is readily accessible from the seat or berth of the person for whose use it is provided.

*Note: “Landplanes” includes amphibians operated as landplanes.*

(b) Seaplanes operated over water shall be equipped with:

- (1) a life-jacket for each person on board, or equivalent individual floatation device for each person on board that shall be worn or stowed in a position that is readily accessible from the seat or berth of the person for whose use it is provided.
- (2) one anchor;
- (3) one sea anchor (drogue), when necessary to assist in manoeuvring; and
- (4) equipment for making the sound signals, as prescribed in the International Regulations for Preventing Collisions at Sea, where applicable.

*Note: “Seaplanes” includes amphibians operated as seaplanes.*

#### **CAR OPS 2.041 Aeroplanes on Extended Flights Over Water**

- (a) An aeroplane operated on an extended flight over water shall be equipped with, at a minimum, one life jacket or equivalent individual floatation device for each person on board, stowed in a position easily accessible from the seat or berth of the person for whose use it is provided.
- (b) The pilot-in-command of an aeroplane operated on an extended flight over water shall determine the risks to survival of the occupants of the aeroplane in the event of a ditching by taking into account the operating environment and conditions such as, but not limited to, sea state and sea and air temperatures, the distance from land suitable for making an emergency landing, and the availability of search and rescue facilities. Based upon that assessment, he/she shall, in addition to the equipment required in paragraph (a) above, ensure that the aeroplane is equipped with;
  - (1) life-rafts in sufficient numbers to carry all persons on board, stowed so as to facilitate their ready use in emergency; and provided with such life-saving equipment, including means of sustaining life, as appropriate to the flight to be undertaken; and
  - (2) equipment for making the distress signals described in CAR 180.

*Note: An extended flight over water is defined as a distance of more than 50 NM (93 km) or 30 minutes at normal cruising speed, whichever is the lesser, away from land suitable for making an emergency landing.*

**CAR OPS 2.042 Aeroplanes on Flights Over Designated Land Areas**

Aeroplanes, when operated across land areas which have been designated by the State concerned as areas in which search and rescue would be especially difficult, shall be equipped with such signalling devices and life-saving equipment (including means of sustaining life) as may be appropriate to the area overflown.

**CAR OPS 2.042A Mach number indicator**

Aeroplanes with speed limitations expressed in terms of Mach number shall be equipped with a means of displaying Mach number

**CAR OPS 2.043 Supplemental Oxygen — Pressurised Aeroplane**

- (a) Pressurised aeroplane operated at flight altitudes for which the oxygen supply is required shall be equipped with oxygen storage and dispensing apparatus capable of storing and dispensing the required oxygen supplies.
- (b) Pressurised aeroplane operated above flight altitudes at which the pressure altitude in the passenger compartments is above 10000 ft shall carry enough breathing oxygen to supply:
  - (1) all crew members and:
    - (i) 100 % of the passengers for any period when the cabin pressure altitude exceeds 15000 ft, but in no case less than 10 minutes' supply.
    - (ii) at least 30 % of the passengers, for any period when, in the event of loss of pressurisation and taking into account the circumstances of the flight, the pressure altitude in the passenger compartment will be between 14000 ft and 15000 ft; and
    - (iii) at least 10 % of the passengers for any period in excess of 30 minutes when the pressure altitude in the passenger compartment will be between 10000 ft and 14000 ft; and
  - (2) all the occupants of the passenger compartment for no less than 10 minutes, in the case of aeroplane operated at pressure altitudes above 25000 ft, or operated below that altitude but under conditions that will not allow them to descend safely to a pressure altitude of 13000 ft within 4 minutes.
  - (3) Pressurised aeroplane operated at flight altitudes above 25000 ft shall, in addition, be equipped with a device to provide a warning indication to the flight crew of any loss of pressurisation.

**CAR OPS 2.044 Supplemental Oxygen — Non-Pressurised Aeroplane**

- (a) Non-pressurised aeroplane operated at flight altitudes when the oxygen supply is required shall be equipped with oxygen storage and dispensing apparatus capable of storing and dispensing the required oxygen supplies.
- (b) Non-pressurised aeroplane operated above flight altitudes at which the pressure altitude in the passenger compartments is above 10000 ft shall carry enough breathing oxygen to supply:
  - (1) all crew members and at least 10 % of the passengers for any period in excess of 30 minutes when the pressure altitude in the passenger compartment will be between 10000 ft and 13000 ft; and
  - (2) all crew members and passengers for any period that the pressure altitude in the passenger compartment will be above 13000 ft.

**CAR OPS 2.045 Noise Certification**

All aeroplane required to comply with the noise certification standards of ICAO Annex 16 shall carry a document attesting noise certification in the English language.

**CAR OPS 2.046 Emergency locator transmitter (ELT)**

- (a) Aeroplanes shall be equipped with;
  - (1) at least one ELT of any type;
  - (2) at least one automatic ELT, for those aeroplanes first issued with an individual C of A after 01 July 2008; or
  - (3) a survival ELT (ELT(S)) or a personal locator beacon (PLB), carried by the pilot-in command or a passenger, when certified for a maximum passenger seating configuration of six or less.
- (b) ELTs of any type and PLBs shall be capable of transmitting simultaneously on 121.5 MHz and 406 MHz.
- (c) ELT equipment carried shall operate in accordance with the relevant provisions of ICAO Annex 10, Volume III.

**CAR OPS 2.047 Pressure-Altitude Reporting Transponder**

- (a) All aeroplanes shall be equipped with a pressure-altitude reporting transponder which operates in accordance with the relevant provisions of ICAO Annex 10, Volume IV.
- (b) Unless exempted by the appropriate authorities, aeroplanes operating as VFR flights shall be equipped with a pressure-altitude reporting transponder which operates in accordance with the relevant provision of Annex 10, Volume IV.
- (c) Note — These provisions are intended to support the effectiveness of ACAS as well as to improve the effectiveness of air traffic services.

**CAR OPS 2.048 Microphones**

When operating under IFR all flight crew members required to be on flight deck duty should communicate through boom or throat microphones below the transition altitude.

**CAR OPS 2.049 [Aeroplane equipped with ALS, HUD or Equivalent Displays, EVS, SVS and/or CVS]**

Notwithstanding CAR OPS 2.013, where aeroplanes are equipped with automatic landing systems, a HUD and/or or equivalent displays, EVS, SVS or CVS, or any combination of those systems into a hybrid system, criteria for the use of such systems to gain operational benefit for the safe operation of the aeroplane shall be approved by the Authority. Such approvals shall not affect the classification of the instrument approach procedure.]

Note — Information regarding automatic landing systems, a HUD or equivalent displays, EVS, SVS OR CVS, is contained in the Manual of All-Weather Operations (Doc 9365).

**CAR OPS 2.050 Ground proximity warning systems (GPWS)**

- (a) All turbine-engine aeroplanes of a maximum certificated take-off mass in excess of 5 700 kg authorized to carry more than nine passengers shall be equipped with a ground proximity warning system which has a forward-looking terrain avoidance function.
- (b) All turbine-engined aeroplanes of a maximum certificated take-off mass of 5 700 kg or less and authorized to carry more than five but not more than nine passengers should be equipped with a ground proximity warning system which has a forward-looking terrain avoidance function.
- (c) All piston-engined aeroplanes of a maximum certificated take-off mass in excess of 5 700 kg or authorized to carry more than nine passengers should be equipped with a ground proximity warning system which has a forward-looking terrain avoidance function.

- (d) A ground proximity warning system shall provide automatically a timely and distinctive warning to the flight crew when the aeroplane is in potentially hazardous proximity to the earth's surface.
- (e) A ground proximity warning system shall provide, at a minimum, warnings of at least the following circumstances:
  - (1) excessive descent rate;
  - (2) excessive altitude loss after take-off or go-around; and
  - (3) unsafe terrain clearance. And should provide the warnings in sub-paragraph (d);
- (f) A ground proximity warning system installed in turbine-engine aeroplanes authorised to carry more than nine passengers for which the individual certificate of airworthiness was first issued after 01 January 2011 shall provide, as a minimum, warnings of at least the following circumstances;
  - (1) excessive descent rate;
  - (2) excessive terrain closure rate;
  - (3) excessive altitude loss after take-off or go-around;
  - (4) unsafe terrain clearance while not in landing configuration;
    - (i) gear not locked down;
    - (ii) flaps not in a landing position; and
  - (5) excessive descent below the instrument glide path.

**CAR OPS 2.051 Electronic Flight Bags (EFB)**

- (a) Where portable EFBs are used on board an aeroplane, the pilot-in-command and/or the operator/owner shall ensure that they do not affect the performance of the aeroplane systems, equipment or the ability to operate the aeroplane.
- (b) Where EFBs are used on board an aeroplane the pilot-in-command and/or the owner shall;
  - (1) assess the safety risk(s) associated with each EFB function;
  - (2) establish the procedures for the use of, and training requirements for, the device and each EFB function; and
  - (3) ensure that, in the event of an EFB failure, sufficient information is readily available to the flight crew for the flight to be conducted safely.

Note — Guidance on safety risk assessments is contained in the Safety Management Manual (SMM) (Doc 9859)

- (c) The Authority shall issue a specific approval for the operational use of EFB functions to be used for the safe operations of aeroplane.
- (d) When issuing a specific approval for the use of EFBs, the Authority shall ensure that:
  - (1) the EFB equipment and its associated installation hardware, including interaction with aeroplane systems if applicable, meet the appropriate airworthiness certification requirements;
  - (2) the operator/owner has assessed the risks associated with the operations supported by the EFB function(s);
  - (3) the operator/owner has established requirements for redundancy of the information (if appropriate) contained and displayed by the EFB function(s);
  - (4) the operator/owner has established and documented procedures for the management of the EFB function(s) including any databases it may use; and
  - (5) the operator/owner has established and documented the procedures for the use of, and training requirements for, the EFB function(s).

*Note: Guidance on EFB equipment, functions and establishing criteria for their operational use is contained in the Manual on Electronic Flight Bags (EFBs) (Doc 10020).*

#### **CAR OPS 2.052 Documents to be Carried**

Every aeroplane engaged in international navigation shall carry the following documents;

- (a) Its certificate of registration;
- (b) Its certificate of airworthiness;
- (c) The appropriate licences for each member of the crew;
- (d) Its journey log book;
- (e) If it is equipped with radio apparatus, the aeroplane radio station licence;
- (f) If it carries passengers, a list of their names and places of embarkation and destination; and
- (g) If it carries cargo, a manifest and detailed declarations of the cargo.
- (h) A certified true copy of the agreement summary, when operating under an Article 83 bis agreement.

*Note 1: The procedures for the carriage of an electronic version of the documents listed in (a), (b) and (e) above must be acceptable to the Authority.*

*Note 2: The Certificate of Registration and the Certificate of Airworthiness will now be presented in digital format. The certificates, when issued by the Authority, are rendered valid as the original*

*documents in their digital form. They satisfy the onboard carriage requirements for aircraft engaged in international air navigation in accordance with Articles 29 and 31 of the Convention on International Civil Aviation as well as the requirements of Annex 7 and 8 to the same Convention.*

## Appendix 1 to CAR OPS 2.038

Lights To Be Displayed by Aeroplanes (See CAR OPS 2.038)

### 1. TERMINOLOGY

When the following terms are used in this Appendix, they have the following meanings:

#### **Angles of coverage.**

- (a) Angle of coverage A is formed by two intersecting vertical planes making angles of 70 degrees to the right and 70 degrees to the left respectively, looking aft along the longitudinal axis to a vertical plane passing through the longitudinal axis.
- (b) Angle of coverage F is formed by two intersecting vertical planes making angles of 110 degrees to the right and 110 degrees to the left respectively, looking forward along the longitudinal axis to a vertical plane passing through the longitudinal axis.
- (c) Angle of coverage L is formed by two intersecting vertical planes, one parallel to the longitudinal axis of the aeroplane, and the other 110 degrees to the left of the first, when looking forward along the longitudinal axis.
- (d) Angle of coverage R is formed by two intersecting vertical planes, one parallel to the longitudinal axis of the aeroplane, and the other 110 degrees to the right of the first, when looking forward along the longitudinal axis.

**Horizontal plane.** The plane containing the longitudinal axis and perpendicular to the plane of symmetry of the aeroplane.

**Longitudinal axis of the aeroplane.** A selected axis parallel to the direction of flight at a normal cruising speed, and passing through the centre of gravity of the aeroplane.

**Making way.** An aeroplane on the surface of the water is “making way” when it is under way and has a velocity relative to the water.

**Under command.** An aeroplane on the surface of the water is “under command” when it is able to execute manoeuvres as required by the International Regulations for Preventing Collisions at Sea for the purpose of avoiding other vessels.



**Under way.** An aeroplane on the surface of the water is “under way” when it is not aground or moored to the ground or to any fixed object on the land or in the water.


**Vertical planes.** Planes perpendicular to the horizontal plane.

**Visible.** Visible on a dark night with a clear atmosphere.

## 2. NAVIGATION LIGHTS TO BE DISPLAYED IN THE AIR

As illustrated in Figure 1, the following unobstructed navigation lights shall be displayed:

- (a) a red light projected above and below the horizontal plane through angle of coverage L;
- (b) a green light projected above and below the horizontal plane through angle of coverage R;
- (c) a white light projected above and below the horizontal plane rearward through angle of coverage A.

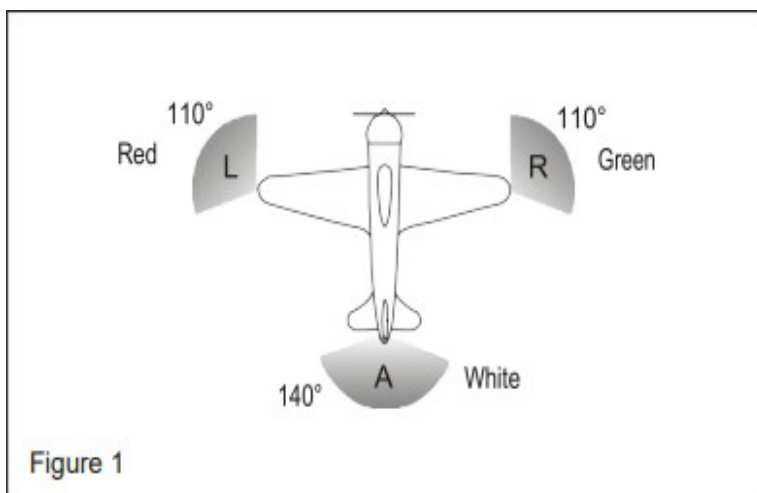

## 3. LIGHTS TO BE DISPLAYED ON THE WATER

### 3.1. General

The International Regulations for Preventing Collisions at Sea require different lights to be displayed in each of the following circumstances:

- (a) when under way;
- (b) when towing another vessel or aeroplane;
- (c) when being towed;
- (d) when not under command and not making way;
- (e) when making way but not under command;

- (f) when at anchor;
- (g) when aground.

The lights required by aeroplanes in each case are described below.

### 3.2. When under way

As illustrated in Figure 2, the following appearing as steady, unobstructed lights:



- (a) a red light projected above and below the horizontal through angle of coverage L;
- (b) a green light projected above and below the horizontal through angle of coverage R;
- (c) a white light projected above and below the horizontal through angle of coverage A; and
- (d) a white light projected through angle of coverage F.

The lights described in (a), (b) and (c) should be visible at a distance of at least 3.7 km (2 NM). The light described in (d) should be visible at a distance of 9.3 km (5 NM) when fitted to an aeroplane of 20 m or more in length or visible at a distance of 5.6 km (3 NM) when fitted to an aeroplane of less than 20 m in length.

### 3.3. When towing another vessel or aeroplane

As illustrated in Figure 3, the following appearing as steady, unobstructed lights:

- (a) the lights described in 3.2;
- (b) a second light having the same characteristics as the light described in 3.2 (d) and mounted in a vertical line at least 2 m above or below it;
- (c) a yellow light having otherwise the same characteristics as the light described in 3.2 (c) and mounted in a vertical line at least 2 m above it.

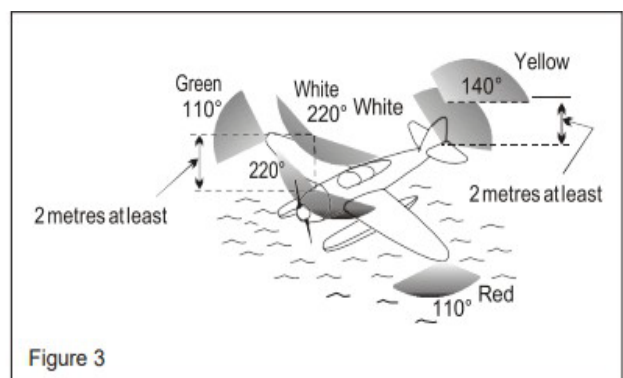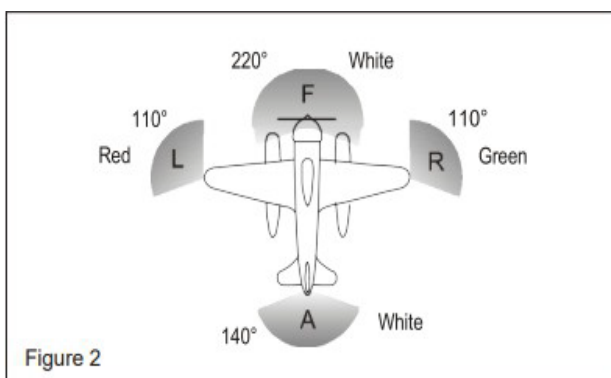

**3.4. When being towed**

The lights described in 3.2 (a), (b) and (c) appearing as steady, unobstructed lights.



**3.5. When not under command and not making way**

As illustrated in Figure 4, two steady red lights placed where they can best be seen, one vertically over the other and not less than 1 m apart, and of such a character as to be visible all around the horizon at a distance of at least 3.7 km (2 NM).



**3.6. When making way but not under command**

As illustrated in Figure 5, the lights described in 3.5 plus the lights described in 3.2 (a), (b) and (c).

*Note: The display of lights prescribed in 3.5 and 3.6 is to be taken by other aircraft as signals that the aeroplane showing them is not under command and cannot therefore get out of the way. They are not signals of aeroplanes in distress and requiring assistance.*

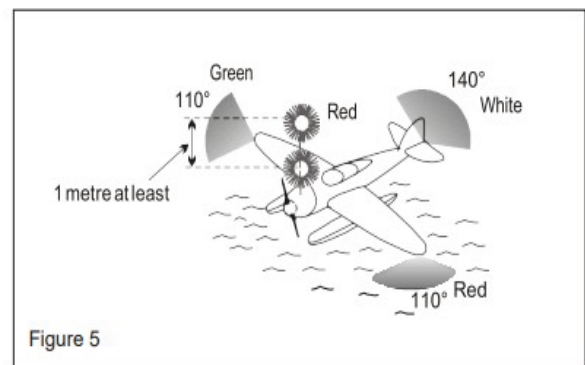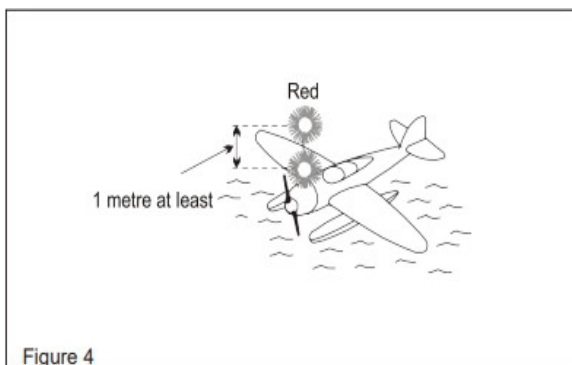**3.7. When at anchor**



- (a) If less than 50 m in length, where it can best be seen, a steady white light (Figure 6), visible all around the horizon at a distance of at least 3.7 km (2 NM).
- (b) If 50 m or more in length, where they can best be seen, a steady white forward light and a steady white rear light (Figure 7) both visible all around the horizon at a distance of at least 5.6 km (3 NM).

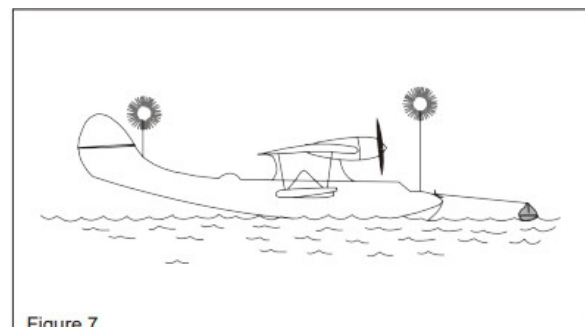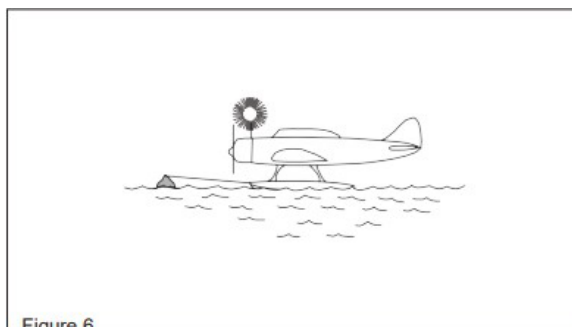

- (c) If 50 m or more in span a steady white light on each side (Figures 8 and 9) to indicate the maximum span and visible, so far as practicable, all around the horizon at a distance of at least 1.9 km (1 NM).

### 3.8. When aground

The lights prescribed in 3.7 and in addition two steady red lights in vertical line, at least 1 m apart so placed as to be visible all around the horizon.

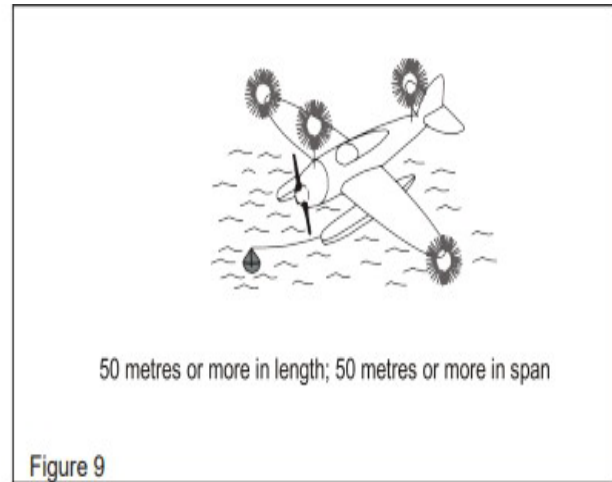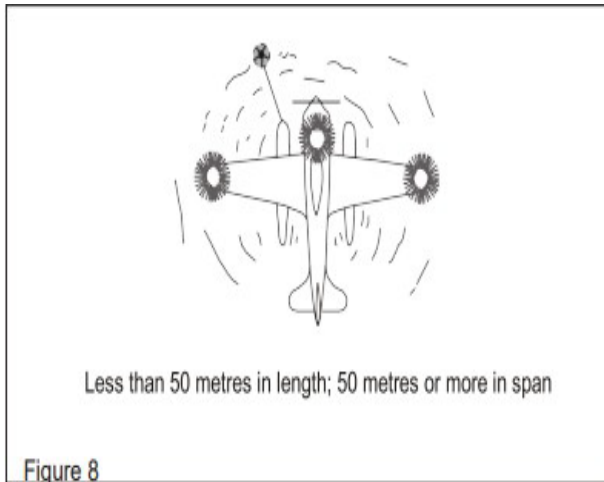

**SUBPART F – COMMUNICATION, NAVIGATION AND SURVEILLANCE EQUIPMENT****CAR OPS 2.053 Communication equipment**

- (a) An aeroplane to be operated in accordance with the instrument flight rules or at night shall be equipped with radio communication equipment capable of conducting two-way communication with those aeronautical stations and on those frequencies to meet airspace requirements.
- (b) When compliance with paragraph (a) requires that more than one communication equipment unit be provided, each shall be independent of the other or others to the extent that a failure in any one will not result in failure of any other.
- (c) An aeroplane to be operated in accordance with VFR, but as a controlled flight, shall, unless exempted by the appropriate authority, be provided with radio communication equipment capable of conducting two-way communication at any time during flight with such aeronautical stations and on such frequencies as may be prescribed by the appropriate authority.
- (d) An aeroplane to be operated on extended over water flights or flights over designated areas shall, unless exempted by the appropriate authority, be provided with radio communication equipment capable of conducting two-way communication at any time during flight with such aeronautical stations and on such frequencies as may be prescribed by the appropriate authority.
- (e) Radio communication equipment, if required by paragraphs (a) to (d) above, shall provide for communication on the aeronautical emergency frequency 121.5 MHz.
- (f) For operations where communication equipment is required to meet an RCP specification for performance-based communication (PBC), an aeroplane shall, in addition to the requirements specified above;
  - (1) be provided with communication equipment which will enable it to operate in accordance with the prescribed RCP specification(s);
  - (2) have information relevant to the aeroplane RCP specification capabilities listed in the flight manual or other aeroplane documentation, approved by the State of Design or State of Registry; and
  - (3) where the aeroplane is operated in accordance with a MEL, have information relevant to the aeroplane RCP specification capabilities included in the MEL.
- (g) The Authority, as the State of Registry, shall establish criteria for operations where an RCP specification for PBC has been prescribed.
- (h) When establishing criteria for operations where an RCP specification for PBC has been prescribed, ensure

that the operator/owner has established and documented:

- (1) normal and abnormal procedures, including contingency procedures;
  - (2) flight crew qualification and proficiency requirements, in accordance with appropriate RCP specifications;
  - (3) a training programme for relevant personnel consistent with the intended operations; and
  - (4) appropriate maintenance procedures to ensure continued airworthiness, in accordance with appropriate RCP specifications.
- (i) The Authority shall ensure that, in respect of those aeroplanes mentioned in sub-paragraph (f) above, adequate provisions exist for:
- (1) receiving the reports of observed communication performance issued by monitoring programmes; and
  - (2) taking immediate corrective action for individual aeroplane, aeroplane types or operators, identified in such reports as not complying with the RCP specification.

*Note 1 — Information on surveillance equipment is contained in the Aeronautical Surveillance Manual (Doc 9924).*

*Note 2— Information on RSP specifications for performance-based surveillance is contained in the Performance-based Communication and Surveillance (PBCS) Manual (Doc 9869).*

#### **CAR OPS 2.054 Navigation equipment**

- (a) An aeroplane shall be equipped with navigation equipment that will enable it to proceed in accordance with:
- (1) the ATS flight plan, if applicable; and
  - (2) the requirements of air traffic services. except when, if not so precluded by the appropriate authority, navigation for flights under VFR is accomplished by visual reference to landmarks.
- (b) An aeroplane shall have sufficient navigation equipment to ensure that, in the event of the failure of one item of equipment at any stage of the flight, the remaining equipment shall allow safe navigation in accordance with (a), or an appropriate contingency action, to be completed safely.
- (c) An aeroplane operated on flights in which it is intended to land in IMC shall be equipped with navigation equipment capable of providing guidance to a point from which a visual landing can be performed. This equipment shall be capable of providing such guidance for each aerodrome at which is intended to land in IMC and for any designated alternate aerodromes.

- (d) Note 2.— The prescribed minimum navigation performance specifications and the procedures governing their application are published in the Regional Supplementary Procedures (Doc 7030).

**CAR OPS 2.055 Performance Based Navigation**

- (a) For operations where a navigation specification for performance-based navigation (PBN) has been prescribed, an aeroplane shall, in addition to the requirements specified in CAR OPS 2.054:
- (1) be provided with navigation equipment which will enable it to operate in accordance with the prescribed navigation specification(s);
  - (2) have information relevant to the aeroplane navigation specification capabilities listed in the flight manual or other aeroplane documentation, approved by the State of Design or State of Registry; and
  - (3) where the aeroplane is operated in accordance with a MEL, have information relevant to the aeroplane navigation specification capabilities included in the MEL.
- (b) The Authority, as the State of Registry, shall establish criteria for operations where a navigation specification for PBN has been prescribed.
- (c) When establishing criteria for operations where a navigation specification for PBN has been prescribed, ensure that the operator/owner has established and documented:
- (1) normal and abnormal procedures, including contingency procedures;
  - (2) flight crew qualification and proficiency requirements, in accordance with appropriate navigation specifications;
  - (3) a training programme for relevant personnel consistent with the intended operations; and
  - (4) appropriate maintenance procedures to ensure continued airworthiness, in accordance with appropriate navigation specifications.
- (d) The Authority, as the State of Registry, shall issue a specific approval for operations based on PBN authorisation required (AR) navigation specifications.

Note 1.— Guidance on safety risks and mitigations for PBN operations, in accordance with Annex 19, are contained in the Performance-based Navigation (PBN) Operational Approval Manual (Doc 9997).

**CAR OPS 2.056 NAT HLA**

For flights in defined portions of the North Atlantic High-Level Airspace where, based on regional air navigation agreement, minimum navigation performance specifications are prescribed, an aeroplane shall be provided with navigation equipment which:

- (a) continuously provides indications to the flight crew of adherence to or departure from track to the required degree of accuracy at any point along that track; and
- (b) has been authorised by the State of Registry for the NAT HLA operations concerned.

**CAR OPS 2.057 RVSM**

(See Appendix 1 to OPS 2.057)

- (a) For flights in defined portions of airspace where, based on regional air navigation agreement, a reduced vertical separation minimum (RVSM) of 300 m (1000 ft) is applied between FL 290 and FL 410 inclusive, an aeroplane:
  - (1) shall be provided with equipment which is capable of:
    - (i) indicating to the flight crew the flight level being flown;
    - (ii) automatically maintaining a selected flight level;
    - (iii) providing an alert to the flight crew when a deviation occurs from the selected flight level.  
The threshold for the alert shall not exceed  $\pm 90$  m (300 ft); and
    - (iv) automatically reporting pressure-altitude;
  - (2) shall be issued with a specific approval by the Authority as the State of Registry for operation in the airspace concerned; and
  - (3) shall demonstrate a satisfactory vertical navigation performance in accordance with Appendix 1 to CAR OPS 2.057.
- (b) Prior to granting the RVSM specific approval required, the Authority shall be satisfied that:
  - (1) the vertical navigation performance capability of the aeroplane is satisfactory;
  - (2) the owner/operator has instituted appropriate procedures in respect of continued airworthiness (maintenance and repair) practices and programmes; and
  - (3) the owner/operator has instituted appropriate flight crew procedures for operations in RVSM airspace.



*Note: A RVSM specific approval is valid globally on the understanding that any operating procedures specific to a given region will be stated in the operations manual or appropriate crew guidance.*

- (c) The Authority as the State of Registry shall ensure that adequate provisions exist for:
  - (1) receiving the reports of height-keeping performance issued by the monitoring agencies; and
  - (2) taking immediate corrective action for individual aeroplane, or aeroplane type groups, identified in such reports as not complying with the height-keeping requirements for operation in airspace where RVSM is applied.
- (d) The Authority as the State of Registry that has issued an RVSM specific approval to an owner/operator shall establish a requirement which ensures that a minimum of two aeroplanes of each aeroplane type grouping of the owner/operator have their height-keeping performance monitored, at least once every two years or within intervals of 1000 flight hours per aeroplane, whichever period is longer. If an owner/operator aeroplane type grouping consists of a single aeroplane, monitoring of that aeroplane shall be accomplished within the specified period.
- (e) The Authority shall establish provisions and procedures which ensure that appropriate action will be taken in respect of aeroplane and owners/operators found to be operating in RVSM airspace without a valid RVSM specific approval.

Note 1.— Guidance material relating to the specific approval for operation in RVSM airspace is contained in the Manual on a 300 m (1 000 ft) Vertical Separation Minimum Between FL 290 and FL 410 Inclusive (Doc 9574)

#### **CAR OPS 2.058 Surveillance Equipment**

- (a) An aeroplane shall be provided with surveillance equipment which will enable it to operate in accordance with the requirements of air traffic services.
- (b) For operations where surveillance equipment is required to meet an RSP specification for performance-based surveillance (PBS), an aeroplane shall, in addition to the requirements specified in sub-paragraph (a);
  - (1) be provided with surveillance equipment which will enable it to operate in accordance with the prescribed RSP specification(s);
  - (2) have information relevant to the aeroplane RSP specification capabilities listed in the flight manual or other aeroplane documentation approved by the State of Design or Authority; and
  - (3) where the aeroplane is operated in accordance with a MEL, have information relevant to the aeroplane RSP specification capabilities included in the MEL.

- (c) The Authority, as the State of the Registry, shall establish criteria for operations where an RSP specification for PBS has been prescribed.
- (d) In establishing criteria for operations where an RSP specification for PBS has been prescribed, the Authority shall require that the operator/owner has established and documented;
  - (1) normal and abnormal procedures, including contingency procedures;
  - (2) flight crew qualification and proficiency requirements, in accordance with appropriate RSP specifications;
  - (3) a training programme for relevant personnel consistent with the intended operations; and
  - (4) appropriate maintenance procedures to ensure continued airworthiness, in accordance with appropriate RSP specifications.
- (e) The Authority, as the State of Registry, shall ensure that, in respect of those aeroplane mentioned in subparagraph (b), adequate provisions exist for;
  - (1) receiving the reports of observed surveillance performance issued by monitoring programmes; and
  - (2) taking immediate corrective action for individual aeroplane, aeroplane types or operators, identified in such reports as not complying with the RSP specification.
  - (3) Note 1.— Information on RSP specifications for performance-based surveillance is contained in the Performance-based Communication and Surveillance (PBCS) Manual (Doc 9869)

**Appendix 1 to OPS 2.057 Altimetry System Performance Requirements for Operations In RVSM Airspace****Height-keeping Performance Requirements (See OPS 2.057)**

- 1. In respect of groups of aeroplanes that are nominally of identical design and build with respect to all details that could influence the accuracy of height-keeping performance, the height-keeping performance capability shall be such that the total vertical error (TVE) for the group of aeroplanes shall have a mean no greater than 25 m (80 ft) in magnitude and shall have a standard deviation no greater than  $28 - 0.013z^2$  for  $0 \leq z \leq 25$  when  $z$  is the magnitude of the mean TVE in metres, or  $92 - 0.004z^2$  for  $0 \leq z \leq 80$  where  $z$  is in feet.
- 2. In addition, the components of TVE shall have the following characteristics:
  - (a) the mean altimetry system error (ASE) of the group shall not exceed 25 m (80 ft) in magnitude;
  - (b) the sum of the absolute value of the mean ASE and of three standard deviations of ASE shall not exceed 75 m (245 ft); and
  - (c) the differences between cleared flight level and the indicated pressure altitude actually flown shall

be symmetric about a mean of 0 m, with a standard deviation no greater than 13.3 m (43.7 ft), and in addition, the decrease in the frequency of differences with increasing difference magnitude shall be at least exponential.

3. In respect of aeroplanes for which the characteristics of the airframe and altimetry system fit are unique and so cannot be classified as belonging to a group of aeroplanes encompassed by paragraph 1, the height-keeping performance capability shall be such that the components of the TVE of the aeroplane have the following characteristics:
  - (a) the ASE of the aeroplane shall not exceed 60 m (200 ft) in magnitude under all flight conditions; and
  - (b) the differences between the cleared flight level and the indicated pressure altitude actually flown shall be symmetric about a mean of 0 m, with a standard deviation no greater than 13.3 m (43.7 ft), and in addition, the decrease in the frequency of differences with increasing difference magnitude shall be at least exponential.

**SUBPART G – MAINTENANCE**

*Note: For the purpose of this chapter “aeroplane” includes: engines, propellers, components, accessories, instruments, equipment and apparatus including emergency equipment.*

**CAR OPS 2.059 Owner’s maintenance responsibilities**

- (a) The owner of an aeroplane, or in the case where it is leased, the lessee, shall ensure, in accordance with the applicable regulations contained in CAR M that;
  - (1) the aeroplane is maintained in an airworthy condition;
  - (2) the operational and emergency equipment necessary for an intended flight is serviceable; and
  - (3) the certificate of airworthiness of the aeroplane remains valid.
- (b) The owner or the lessee shall not operate the aeroplane unless it is maintained and released to service under a system acceptable to the State of Registry.
- (c) The owner or the lessee shall not operate an aeroplane unless maintenance on the aeroplane, including any associated engine, propeller and part is carried out, and released to service by an organisation appropriately approved/accepted in accordance with CAR 145/ CAR M Subpart F, except that pre-flight inspections need not necessarily be carried out by the CAR 145 organisation.
- (d) When the maintenance release is not issued by an approved maintenance organisation, the person signing the maintenance release shall be licensed in accordance with ICAO Annex 1.
- (e) The owner or the lessee shall ensure that the maintenance of the aeroplane is performed in accordance with a maintenance programme acceptable to the Authority as the State of Registry.
- (f) The owner or the lessee shall appoint an Airworthiness Coordinator who shall be responsible for the control of the maintenance system and the maintenance control manual, if applicable.

**CAR OPS 2.060 Continuing airworthiness records**

- (a) The owner of an aeroplane, or in the case where it is leased, the lessee, shall ensure that the following records are kept for the periods mentioned in (b) below:
  - (1) the total time in service (hours, calendar time and cycles, as appropriate) of the aeroplane and all life limited components;
  - (2) the current status of compliance with all applicable mandatory continuing airworthiness information;
  - (3) appropriate details of modifications and repairs;

- (4) the time in service (hours, calendar time and cycles, as appropriate) since the last overhaul of the aeroplane or its components subject to a mandatory overhaul life;
  - (5) the current status of the aeroplane's compliance with the maintenance programme; and
  - (6) the detailed continuing airworthiness records to show that all requirements for the signing of a maintenance release have been met.
- (b) The records in (a)(1) to (5) above shall be kept for a minimum period of 90 days after the unit to which they refer has been permanently withdrawn from service and the records in (a)(6) for a minimum period of one year after the signing of the maintenance release.
- (c) In the event of a temporary change of owner or lessee, the records shall be made available to the new owner or lessee. In the event of any permanent change of owner or lessee, the records shall be transferred to the new owner or lessee.

The operator shall ensure that a system has been established to keep, in a form and format that ensures readability, security and integrity of the records at all times and is acceptable to the Authority. Note 1: The form and format of the records may include, for example, paper records, film records, electronic records or any combination thereof.

*Note 2.— Guidance regarding electronic aircraft continuing airworthiness records is included in the Airworthiness Manual (Doc 9760)*

#### **CAR OPS 2.061 Modifications and repairs**

All modifications and repairs shall comply with airworthiness requirements acceptable to the Authority, as the State of Registry. Procedures shall be established to ensure that the substantiating data supporting compliance with the airworthiness requirements are retained.

#### **CAR OPS 2.062 Maintenance release**

- (a) A maintenance release shall be completed and signed, as prescribed by the Authority, as the State of Registry, to certify that the maintenance work performed has been completed satisfactorily and in accordance with data and procedures as stated in CAR M.
- (b) When maintenance is carried out by an approved maintenance organisation, the maintenance release shall be issued by the approved maintenance organisation in accordance with the provisions of CAR 145.
- (c) When maintenance is not carried out by an approved maintenance organisation, the maintenance

release shall be completed and signed by a person appropriately licensed in accordance with ICAO Annex 1 to certify that the maintenance work performed has been completed satisfactorily and in accordance with approved data and the procedures as stated in CAR M.

*Note: Please refer to CAR M for in detailed and specific information.*

**SUBPART H – FLIGHT CREW****CAR OPS 2.063 Composition of the flight crew**

The number and composition of the flight crew shall not be less than that specified in the flight manual or other documents associated with the certificate of airworthiness.

**CAR OPS 2.064 Qualifications**

- (a) The pilot-in-command shall:
- (1) ensure that each flight crew member holds a valid licence issued by the Authority, as the State of Registry, or if issued by another Contracting State, rendered valid by the Authority as the State of Registry;
  - (2) ensure that flight crew members are properly rated; and
  - (3) be satisfied that flight crew members have maintained competency.
- (b) The pilot-in-command of an aeroplane equipped with an airborne collision avoidance system (ACAS II) shall ensure that each flight crew member has been appropriately trained to competency in the use of ACAS II equipment and the avoidance of collision.

Note 1.— Procedures for the use of ACAS II equipment are specified in the Procedures for Air Navigation Services — Aircraft Operations (PANS-OPS, Doc 8168), Volume I — Flight Procedures. ACAS II Training Guidelines for Pilots are provided in PANS-OPS, Volume I, Attachment A to Part III, Section 3, Chapter 3.

**SUBPART I – MANUALS LOGS & RECORDS****CAR OPS 2.065 Flight manual**

The aeroplane flight manual shall be updated by implementing changes made mandatory by the Authority as the State of Registry.

**CAR OPS 2.066 Journey log book**

A journey log book shall be maintained for every aeroplane engaged in international air navigation in which shall be entered particulars of the aeroplane, its crew and each journey.

*Note: The aeroplane journey log should contain the following items:*

- (a) aeroplane nationality and registration;
- (b) date;
- (c) crew member names and duty assignments;
- (d) departure and arrival points and times;
- (e) purpose of flight;
- (f) observations regarding the flight; and
- (g) signature of the pilot-in-command.

**CAR OPS 2.067 Records of emergency and survival equipment carried**

The owner of the aeroplane, or in the case where it is leased, the lessee, shall at all times have available for immediate communication to rescue coordination centres, lists containing information on the emergency and survival equipment carried on board the aeroplane engaged in international air navigation.

The information shall include, as applicable, the number, colour and type of life rafts and pyrotechnics, details of emergency medical supplies, water supplies and the type and frequencies of the emergency portable radio equipment.



**SUBPART J – SECURITY****CAR OPS 2.068 Security of aeroplane**

The pilot-in-command shall be responsible for the security of the aeroplane during its operation.

**CAR OPS 2.069 Reporting acts of unlawful interference**

Following an act of unlawful interference, the pilot-in-command shall submit a report of such an act to the designated local authority.

*Note: In the context of this Subpart, the word “security” is used in the sense of prevention of acts of unlawful interference against civil aviation.*

**PART II – LARGE AND TURBOJET AEROPLANES****SUBPART A – APPLICABILITY****CAR OPS 2.070 Applicability**

- (a) CAR OPS 2, Part II states additional requirements for large and turbojet aeroplanes and applies to all general aviation operations. In addition to the regulations contained in CAR OPS 2 Part I, General Aviation operators of following aeroplanes shall also comply with the regulations contained in CAR OPS 2 Part II.
- (1) an aeroplane;
    - (i) with a maximum certificated take-off mass exceeding 5 700 kg, or
    - (ii) equipped with one or more turbojet engines.

Recommendation: An operation involving an aeroplane with a seating configuration of more than 9 passenger seats should be conducted in accordance with part II

**CAR OPS 2.071 Leasing and Interchange**

- (a) An operator may lease an aeroplane with flight crew to another person for a private operation for the following;
- (1) Ferry or training flights;
  - (2) Specialised operations such as aerial photography or survey, or pipeline patrol only;
  - (3) Flights for the demonstration of an aeroplane to prospective customers when no charge is made except for those specified in paragraph (c) of this section;
  - (4) Flights conducted by the operator of an aeroplane for his personal transportation, or the transportation of his guests when no charge, assessment, or fee is made for the transportation;
  - (5) Carriage of officials, employees, guests, and property of a company on an aeroplane operated by that company, or the parent or a subsidiary of the company or a subsidiary of the parent, when the carriage is within the scope of, and incidental to, the business of the company (other than transportation by air) and no charge, assessment or fee is made for the carriage in excess of the cost of owning, operating, and maintaining the aeroplane, except that no charge of any kind may be made for the carriage of a guest of a company, when the carriage is not within the scope of, and incidental to, the business of that company;
  - (6) The carriage of company officials, employees, and guests of the company on an aeroplane operated under a time sharing, interchange, or joint ownership agreement as defined in paragraph (b);

- (7) The carriage of property (other than mail) on an aeroplane operated by a person in the furtherance of a business or employment (other than transportation by air) when the carriage is within the scope of, and incidental to, that business or employment and no charge, assessment, or fee is made for the carriage other than those specified in paragraph (c);
- (8) The carriage on an aeroplane of an athletic team, sports group, choral group, or similar group having a common purpose or objective when there is no charge, assessment, or fee of any kind made by any person for that carriage; and
- (9) The carriage of persons on an aeroplane operated by a person in the furtherance of a business other than transportation by air for the purpose of selling them land, goods, or property, including franchises or distributorships, when the carriage is within the scope of, and incidental to, that business and no charge, assessment, or fee is made for that carriage.
- (10) Any operation identified in paragraphs (a)(1) through (a)(9) of this section when conducted;
  - (i) by a fractional ownership programme manager under CAR OPS 2.072, or
  - (ii) by a fractional owner in a fractional ownership programme aircraft, except that a flight under a joint ownership arrangement under paragraph (a)(6) of this section may not be conducted. For a flight under an interchange agreement under paragraph (a)(6) of this section, the exchange of equal time for the operation must be properly accounted for as part of the total hours associated with the fractional owner's share of ownership.
- (b) For the purpose of paragraph (a);
  - (1) A time-sharing agreement means an arrangement whereby a person leases his/her aeroplane with flight crew to another person, and no charge is made for the flights conducted under that arrangement other than those specified in paragraph (c) of this section;
  - (2) An interchange agreement means an arrangement whereby a person leases his/her aeroplane to another person in exchange for equal time, when needed, on the other person's aeroplane, and no charge, assessment, or fee is made, except that a charge may be made not to exceed the difference between the cost of owning, operating, and maintaining the two airplanes;
  - (3) A joint ownership agreement means an arrangement whereby one of the registered joint owners of an aeroplane employs and furnishes the flight crew for that aeroplane and each of the registered joint owners pays a share of the charge specified in the agreement.
- (c) The following may be charged, as expenses of a specific flight, for transportation as authorised by paragraphs (a)(3) and (7) and (b)(1);
  - (1) Fuel, oil, lubricants, and other additives.
  - (2) Travel expenses of the crew, including food, lodging, and ground transportation.
  - (3) Hangar and tie-down costs away from the aeroplane's base of operation.

- (4) Insurance obtained for the specific flight.
- (5) Landing fees, airport taxes, and similar assessments.
- (6) Customs, foreign permit, and similar fees directly related to the flight.
- (7) In flight food and beverages.
- (8) Passenger ground transportation.
- (9) Flight planning and weather contract services.
- (10) An additional charge equal to 100% of the expenses listed in sub-paragraph (c)(1).

**CAR OPS 2.072 Fractional Ownership Operations**

- (a) No person shall engage in a fractional ownership operation unless specifically approved by the Authority and in accordance with any directives and management specifications issued by the Authority governing;
  - (1) the provision of programme management services in a fractional ownership programme;
  - (2) the operation of a fractional ownership programme aircraft in a fractional ownership programme;  
and
  - (3) the operation of a programme aircraft included in a fractional ownership programme managed by an affiliate of the manager of the programme to which the owner belongs.

**SUBPART B - GENERAL****CAR OPS 2.073 Compliance with Laws, Regulations and Procedures**

- (a) The operator shall ensure that all employees know that they shall comply with the laws, regulations and procedures of those States in which operations are conducted.
- (b) The operator shall ensure that all pilots are familiar with the laws, regulations and procedures, pertinent to the performance of their duties, prescribed for the areas to be traversed, the aerodromes to be used and the air navigation facilities relating thereto.
- (c) The operator shall ensure that other members of the flight crew are familiar with such of these laws, regulations and procedures as are pertinent to the performance of their respective duties in the operation of the aeroplane.
- (d) The pilot-in-command is responsible for operational control. The operator shall describe the operational control system in the operations manual and identify the roles and responsibilities of those involved with the system.
- (e) The operator shall ensure that the pilot-in-command has available on board the aeroplane all the essential information concerning the search and rescue services in the area over which the aeroplane will be flown.
- (f) This information shall be made available to the pilot by means of the operations manual. or such other means as is considered appropriate.
- (g) The operator shall ensure that flight crew members demonstrate the ability to speak and understand the English language.

**CAR OPS 2.074 Safety Management System**

(See Appendix 1 to CAR OPS 2.074)

- (a) The operator shall establish and maintain a safety management system that is appropriate to the size and complexity of the operation.
- (b) The SMS of the operator shall be established in accordance with the framework elements contained in Appendix 1 to CAR OPS 2.074.
- (c) Principles for Protection of Safety Data, Safety Information and Related Sources contained in Appendix 2 to CAR OPS 2.074

*Note.— Annex 19 includes safety management provisions for international general aviation operators of large or turbojet aeroplanes. Further guidance is contained in the Safety Management Manual (SMM) (Doc 9859). Note - Also, refer CAA Oman, CAR 100: Safety Management System and related CAP SMS 1 & 2.*

**Appendix 1 to CAR OPS 2.074**

Framework for a Safety Management System (SMS) (See CAR OPS 2.074)

This Appendix specifies the framework for the implementation and maintenance of an SMS. The framework comprises four components and twelve elements as the minimum requirements for SMS implementation:

**1. Safety policy and objectives****1.1 Management commitment**

1.1.1 The operator shall define its safety policy in accordance with international and national requirements. The safety policy shall:

- (a) reflect organisational commitment regarding safety, including the promotion of a positive safety culture;
- (b) include a clear statement about the provision of the necessary resources for the implementation of the safety policy;
- (c) include safety reporting procedures;
- (d) clearly indicate which types of behaviours are unacceptable related to the operator's aviation activities and include the circumstances under which disciplinary action would not apply;
- (e) be signed by the accountable manager or owner of the organisation;
- (f) be communicated, with visible endorsement, throughout the organisation; and
- (g) be periodically reviewed to ensure it remains relevant and appropriate to the operator.

1.1.2 Taking due account of its safety policy, the operator shall define safety objectives. The safety objectives shall:

- (a) form the basis for safety performance monitoring and measurement;
- (b) reflect the operator's commitment to maintain or continuously improve the overall effectiveness of the SMS;
- (c) be communicated throughout the organisation; and
- (d) be periodically reviewed to ensure they remain relevant and appropriate to the operator.

**1.2 Safety accountability and responsibilities The operator shall:**

- (a) identify the accountable executive who, irrespective of other functions, is accountable on behalf of the organisation for the implementation and maintenance of an effective SMS;
- (b) clearly define lines of safety accountability throughout the organisation, including a direct accountability for safety on the part of senior management;
- (c) identify the responsibilities of all members of management, irrespective of other functions, as well as of employees, with respect to the safety performance of the organisation;

- (d) document and communicate safety accountability, responsibilities and authorities throughout the organisation; and
- (e) define the levels of management with authority to make decisions regarding safety risk tolerability.

### 1.3 Appointment of key safety personnel

The operator shall appoint a safety manager who is responsible for the implementation and maintenance of the SMS.

*Note: Depending on the size of the operator and the complexity of its services, the responsibilities for the implementation and maintenance of the SMS may be assigned to one or more persons, fulfilling the role of safety manager, as their sole function or combined with other duties, provided these do not result in any conflicts of interest.*

### 1.4 Coordination of emergency response planning

The operator required to establish and maintain an emergency response plan for accidents and incidents in aeroplane operations and other aviation emergencies shall ensure that the emergency response plan is properly coordinated with the emergency response plans of those organisations it must interface with during the provision of its services.

### 1.5 SMS documentation

#### 1.5.1 The operator shall develop and maintain an SMS manual that describes its:

- (a) safety policy and objectives;
- (b) SMS requirements;
- (c) SMS processes and procedures; and
- (d) accountability, responsibilities and authorities for SMS processes and procedures.

#### 1.5.2 The operator shall develop and maintain SMS operational records as part of its SMS documentation. Note Depending on the size of the operator and the complexity of its aviation services, the SMS manual and SMS operational records may be in the form of stand-alone documents or may be integrated with other organisational documents (or documentation) maintained by the operator.

## 2. Safety risk management

### 2.1 Hazard identification

#### 2.2.1 The operator shall develop and maintain a process to identify hazards associated with its services.

#### 2.2.2 Hazard identification shall be based on a combination of reactive and proactive methods.

### 2.2 Safety risk assessment and mitigation

The operator shall develop and maintain a process that ensures analysis, assessment and control of the safety risks associated with identified hazards.

*Note: The process may include predictive methods of safety data analysis.*

### **3. Safety assurance**

#### **3.1 Safety performance monitoring and measurement**

- 3.1.1 The operator shall develop and maintain the means to verify the safety performance of the organisation and to validate the effectiveness of safety risk controls.

*Note: An internal audit process is one means to monitor compliance with safety regulations, the foundation upon which SMS is built, and assess the effectiveness of these safety risk controls and the SMS.*

- 3.1.2 The operator's safety performance shall be verified in reference to the safety performance indicators and safety performance targets of the SMS in support of the organisation's safety objectives.

#### **3.2 The management of change**

The operator shall develop and maintain a process to identify changes which may affect the level of safety risk associated with its services and to identify and manage the safety risks that may arise from those changes.

#### **3.3 Continuous improvement of the SMS**

The operator shall monitor and assess its SMS processes to maintain or continuously improve the overall effectiveness of the SMS.

### **4. Safety promotion**

#### **4.1 Training and education**

- 4.1.1 The operator shall develop and maintain a safety training programme that ensures that personnel are trained and competent to perform their SMS duties.
- 4.1.2 The scope of the safety training programme shall be appropriate to each individual's involvement in the SMS.

#### **4.2 Safety communication**

The operator shall develop and maintain a formal means for safety communication that:

- (a) ensures personnel are aware of the SMS to a degree commensurate with their positions;
- (b) conveys safety-critical information;
- (c) explains why particular actions are taken to improve safety; and
- (d) explains why safety procedures are introduced or changed.



**Appendix 2 to CAR OPS 2.074**

Principles for Protection of Safety Data, Safety Information and Related Sources (See CAR OPS 2.074)

**General principles**

- (a) The Authority shall, through national laws, regulations and policies protecting safety data, safety information and related sources, ensure that:
- (1) a balance is struck between the need for the protection of safety data, safety information and related sources to maintain or improve aviation safety, and the need for the proper administration of justice;
  - (2) safety data, safety information and related sources are protected in accordance with CAR OPS 2.009, as applicable;
  - (3) the conditions under which safety data, safety information and related sources qualify for protection are specified; and
  - (4) safety data and safety information remain available for the purpose of maintaining or improving aviation safety.

**1. Principles of protection**

- (a) The Authority shall ensure that safety data or safety information is not used for:
- (1) disciplinary, civil, administrative and criminal proceedings against employees, operational personnel or organizations;
  - (2) disclosure to the public; or
  - (3) any purposes other than maintaining or improving safety; unless a principle of exception applies.
- (b) The Authority shall accord protection to safety data, safety information and related sources by ensuring that:
- (1) the protection is specified based on the nature of safety data and safety information;
  - (2) a formal procedure to provide protection to safety data, safety information and related sources is established;
  - (3) safety data and safety information will not be used in a way different from the purposes for which they were collected, unless a principle of exception applies; and
  - (4) to the extent that a principle of exception applies, the use of safety data and safety information in disciplinary, civil, administrative and criminal proceedings will be carried out only under authoritative safeguards.

*Note 1: The formal procedure may include that any person seeking disclosure of safety data or safety information will provide the justification for its release.*

*Note 2: Authoritative safeguards include legal limitations or restrictions such as protective orders,*

*closed proceedings, in-camera review, and de-identification of data for the use or disclosure of safety information in judicial or administrative proceedings.*

## **2. Principles of exception**

- (a) Exceptions to the protection of safety data, safety information and related sources shall only be granted when the Authority;
- (1) determines that there are facts and circumstances reasonably indicating that the occurrence may have been caused by an act or omission considered, in accordance with national laws, to be conduct constituting gross negligence, willful misconduct or criminal activity;
  - (2) after reviewing the safety data or safety information, determines that its release is necessary for the proper administration of justice, and that the benefits of its release outweigh the adverse domestic and international impact such release is likely to have on the future collection and availability of safety data and safety information; or
  - (3) after reviewing the safety data or safety information, determines that its release is necessary for maintaining or improving safety, and that the benefits of its release outweigh the adverse domestic and international impact such release is likely to have on the future collection and availability of safety data and safety information.

*Note 1: In administering the decision, the Authority considers the consent of the source of the safety data and safety information.*

*Note 2: Different competent authorities may be designated for different circumstances. The competent authority could include, but is not limited to, judicial authorities or those otherwise entrusted with aviation responsibilities designated in accordance with national law.*

## **3. Public disclosure**

- (a) The Authority shall, in the context of requests made for public disclosure, create exceptions from public disclosure to ensure the continued confidentiality of voluntarily supplied safety data and safety information.

*Note: Laws, regulations and policies commonly referred to as right-to-know laws (freedom-of information or open records) allow for public access to information held by the Authority.*

- (b) Where disclosure is made in accordance with Section 3 above, the Authority shall ensure that:
- (1) public disclosure of relevant personal information included in the safety data or safety information complies with applicable privacy laws; or
  - (2) public disclosure of the safety data or safety information is made in a de-identified, summarized or aggregate form.

## **4. Responsibility of the custodian of safety data and safety information**

The Authority shall ensure that each safety data collection and processing systems has a designated custodian to apply the protection to safety data and safety information in accordance with

applicable provisions of these regulations.

*Note: The “custodian” may refer to an individual or organisation.*

**5. Protection of recorded data**

- (a) The Authority shall, through national laws and regulations, provide specific measures of protection regarding the confidentiality and access by the public to ambient workplace recordings.
- (b) The Authority shall, through national laws and regulations, treat ambient workplace recordings required by national laws and regulations as privileged protected data subject to the principles of protection and exception as provided for in these regulations.

*Note 1: Ambient workplace recordings required by national laws, for example, cockpit voice recorders (CVRs) or recordings of background communication and the aural environment at air traffic controller work stations may be perceived as constituting an invasion of privacy for operational personnel that other professions are not exposed to.*

*Note 2: Provisions on the protection of flight recorder recordings and recordings from air traffic control units during investigations instituted are contained in ICAO Annex 13. Provisions on the protection of flight recorder recordings during normal operations are contained in CAR OPS 2.009.*

**SUBPART C - FLIGHT OPERATIONS****OPERATIONAL MANAGEMENT (BEFORE FLIGHT)****CAR OPS 2.075 Operating facilities**

- (a) The operator shall ensure that a flight will not be commenced unless it has been ascertained by every reasonable means available that the ground and/or water facilities including communication facilities and navigation aids available and directly required on such flight, for the safe operation of the aeroplane, are adequate for the type of operation under which the flight is to be conducted.

*Note: "Reasonable means" in this regulation is intended to denote the use, at the point of departure, of information available to the operator either through official information published by the aeronautical information services or readily obtainable from other sources.*

- (b) The operator, in making a decision on the adequacy of facilities and services available at an aerodrome of intended operation, shall assess the level of safety risk associated with the aircraft type and nature of the operation, in relation to the availability of rescue and firefighting services (RFFS).

**CAR OPS 2.076 Operator notification**

- (a) If the operator has an operating base in a State other than The Sultanate of Oman, as the State of Registry, the operator shall notify the State in which the operating base is located.
- (b) Upon notification in accordance with (a) above, safety and security oversight shall be coordinated between the State in which the operating base is located and the Authority as the State of Registry.

**CAR OPS 2.077 Operations manual**

See Appendix 1 to CAR OPS 2.077)

- (a) The operator shall provide, for the use and guidance of personnel concerned, an operations manual containing all the instructions and information necessary for operations personnel to perform their duties.
- (b) The operations manual shall be amended or revised as is necessary to ensure that the information contained therein is kept up to date.
- (c) All such amendments or revisions shall be issued to all personnel that are required to use this manual.
- (d) The design of the manual should observe Human Factors principles.

**CAR OPS 2.078 Operating instructions — general**

The operator shall ensure that all operations personnel are properly instructed in their particular duties and responsibilities and the relationship of such duties to the operation as a whole.

*Note: The operator should issue operating instructions and provide information on aeroplane climb performance to enable the pilot-in-command to determine the climb gradient that can be achieved during the departure phase for the existing take-off conditions and intended take-off technique. This information should be included in the Operations Manual.*

**CAR OPS 2.079 In-flight simulation of emergency situations**

The operator shall ensure that when passengers are being carried, no emergency or abnormal situations shall be simulated.

**CAR OPS 2.080 Checklists**

Checklists shall be used by flight crews prior to, during and after all phases of operations, and in emergencies, to ensure compliance with the operating procedures contained in the aeroplane operating manual and the aeroplane flight manual or other documents associated with the certificate of airworthiness and otherwise in the operations manual, are followed. The design and utilisation of checklists shall observe Human Factors principles.

**CAR OPS 2.081 Minimum flight altitudes**

(See CAR OPS 2.013 Aerodrome Operating Minima)

The operator shall specify, for flights which are to be conducted in accordance with the instrument flight rules, the method of establishing terrain clearance altitudes.

**CAR OPS 2.082 Fatigue management programme**

The operator shall establish and implement a fatigue management programme that ensures that all operator personnel involved in the operation and maintenance of aeroplane do not carry out their duties when fatigued. The programme shall address flight and duty times and be included in the operations manual. *Note.—* Guidance on fatigue management programmes can be found in the Fatigue Management Manual for General Aviation (Doc 10033)

**CAR OPS 2.083 Operational flight planning**

The operator shall specify flight planning procedures to provide for the safe conduct of the flight based on considerations of aeroplane performance, other operating limitations and relevant expected conditions on the route to be followed and at the aerodromes concerned. These procedures shall be included in the operations manual.

*Note 1.— The requirements for flight plans are contained in Annex 2 — Rules of the Air and the procedures relating to flight plans and associated services are contained in the Procedures for Air Navigation Services — Air Traffic Management (PANS-ATM, Doc 4444).*

*Note 2.— Detailed guidance on the use of the FF-ICE services, including the use of a preliminary flight plan, can be found in the Manual on Flight and Flow — Information for a Collaborative Environment (FF-ICE) (Doc 9965).*

**CAR OPS 2.084 Take-off Alternate Aerodromes**

- (a) A take-off alternate aerodrome shall be selected and specified in the flight plan if either the meteorological conditions at the aerodrome of departure are below the applicable aerodrome landing minima for that operation or if it would not be possible to return to the aerodrome of departure for other reasons.
- (b) The take-off alternate aerodrome shall be located within the following flight time from the aerodrome of departure:
  - (1) For aeroplanes with two engines - one hour of flight time at a one-engine-inoperative cruising speed determined from the aeroplane operating manual, calculated in ISA and still-air conditions using the actual take-off mass; or
  - (2) For aeroplanes with three or more engines - two hours of flight time at an all engines operating cruising speed determined from the aeroplane operating manual, calculated in ISA and still-air conditions using the actual take-off mass.
- (c) For an aerodrome to be selected as a take-off alternate the available information shall indicate that, at the estimated time of use, the conditions will be at or above the applicable aerodrome operating minima for that operation.

**CAR OPS 2.085 Fuel requirements**

- (a) An aeroplane shall carry a sufficient amount of usable fuel to complete the planned flight safely and to allow for deviations from the planned operation. The amount of usable fuel to be carried shall, as a minimum, be based on:

- (1) fuel consumption data:
  - (i) provided by the aeroplane manufacturer; or
  - (ii) if available, current aeroplane-specific data derived from a fuel consumption monitoring system; and
- (2) the operating conditions for the planned flight including:
  - (i) anticipated aeroplane mass;
  - (ii) Notices to Airmen;
  - (iii) current meteorological reports or a combination of current reports and forecasts;
  - (iv) air traffic services procedures, restrictions and anticipated delays; and
  - (v) the effects of deferred maintenance items and/or configuration deviations.

*Note: Where no specific fuel consumption data exists for the precise conditions of the flight, the aeroplane may be operated in accordance with estimated fuel consumption data.*

- (b) The pre-flight calculation of usable fuel required shall include:
- (1) taxi fuel, which shall be the amount of fuel expected to be consumed before take-off considering local conditions at the departure aerodrome and auxiliary power unit (APU) fuel consumption;
  - (2) trip fuel, which shall be the amount of fuel required to enable the aeroplane to fly from take-off until landing at the destination aerodrome considering the operating conditions of (a) above;
  - (3) contingency fuel, which shall be the amount of fuel required to compensate for unforeseen factors. It shall be not less than five per cent of the planned trip fuel;

*Note: Unforeseen factors are those which could have an influence on the fuel consumption to the destination aerodrome, such as deviations of an individual aeroplane from the expected fuel consumption data, deviations from forecast meteorological conditions, extended delays and deviations from planned routings and/or cruising levels.*

- (4) destination alternate fuel, which shall be:
  - (i) where a destination alternate aerodrome is required, the amount of fuel required to enable the aeroplane to:
    - a. perform a missed approach at the destination aerodrome;
    - b. climb to the expected cruising altitude;
    - c. fly the expected routing;
    - d. descend to the point where the expected approach is initiated; and
    - e. conduct the approach and landing at the destination alternate aerodrome; or
  - (ii) where a flight is operated without a destination alternate aerodrome, the amount of fuel required to enable the aeroplane to fly for 15 minutes at holding speed at 450 m (1 500 ft) above destination aerodrome elevation in standard conditions; or

- (iii) where the aerodrome of intended landing is an isolated aerodrome:
  - a. for a reciprocating engine aeroplane, the amount of fuel required to fly for 45 minutes plus 15 per cent of the flight time planned to be spent at cruising level, including final reserve fuel, or two hours, whichever is less; or
  - b. for a turbine-engine aeroplane, the amount of fuel required to fly for two hours at normal cruise consumption above the destination aerodrome, including final reserve fuel;
- (5) final reserve fuel, which shall be the amount of fuel on arrival at the destination alternate aerodrome, or the destination aerodrome when no destination alternate aerodrome is required:
  - (i) for a reciprocating engine aeroplane, the amount of fuel required to fly for 45 minutes; or
  - (ii) for a turbine-engined aeroplane, the amount of fuel required to fly for 30 minutes at holding speed at 450 m (1 500 ft) above aerodrome elevation in standard conditions;
- (6) additional fuel, which shall be the supplementary amount of fuel required to enable the aeroplane to descend as necessary and proceed to land at an alternate aerodrome in the event of engine failure or loss of pressurization based on the assumption that such a failure occurs at the most critical point along the route;
- (7) discretionary fuel, which shall be the extra amount of fuel to be carried at the discretion of the pilot- in-command.
- (c) Operators should determine one final reserve fuel value for each aeroplane type and variant in their fleet rounded up to an easily recalled figure.
- (d) the use of fuel after flight commencement for purposes other than originally intended during pre-flight planning shall require a re-analysis and, if applicable, adjustment of the planned operation.

*Note: Nothing in CAR OPS 2.085 precludes the in-flight amendment of a flight plan to re-plan that flight to another aerodrome, provided that these requirements can be complied with from the point where the flight is re-planned.*

#### **CAR OPS 2.086 Refuelling with Passengers on Board**

- (a) An aeroplane shall not be refuelled when passengers are embarking, on board or disembarking unless it is properly attended by qualified personnel ready to initiate and direct an evacuation of the aeroplane by the most practical and expeditious means available.
- (b) Two-way communication shall be maintained by the aeroplane's intercommunication system or other suitable means between the ground crew supervising the refuelling and the qualified personnel on board the aeroplane.
- (c) Passengers shall remain seated without seat belts fastened during these periods of operations; and



- (d) Emergency light shall be in the armed position if installed.

*Note - It is recommended that the window blinds are in the up position.*

**CAR OPS 2.087 Oxygen Supply**

- (a) A flight to be operated at flight altitudes at which the cabin pressure in personnel compartments will be higher than 10000 ft shall not be commenced unless sufficient stored breathing oxygen is carried to supply:
- (1) all crew members and 10 per cent of the passengers for any period in excess of 30 minutes that the cabin pressure in compartments occupied by them will be between 10000 ft and 13000 ft; and
  - (2) the crew and passengers for any period that the cabin pressure in compartments occupied by them will be greater than 13000 ft.
- (b) A flight to be operated with a pressurized aeroplane shall not be commenced unless a sufficient quantity of stored breathing oxygen is carried to supply all the crew members and passengers, as is appropriate to the circumstances of the flight being undertaken, in the event of loss of pressurization, for any period that the cabin pressure in any compartment occupied by them would be more than 10000 ft. In addition, when an aeroplane is operated at flight altitudes at which the atmospheric pressure is less than 376 hPa (25000 ft), or which, if operated at flight altitudes at which the atmospheric pressure is more than 376 hPa (25000 ft) and cannot descend safely within four minutes to a flight altitude at which the cabin pressure is equal to 13000 ft, there shall be no less than a 10-minute supply for the occupants of the passenger compartment.

**IN-FLIGHT PROCEDURES****CAR OPS 2.088 Use of Oxygen**

- (a) All flight crew members, when engaged in performing duties essential to the safe operation of an aeroplane inflight, shall use breathing oxygen continuously whenever the circumstances prevail for which its supply has been required in CAR OPS 2.087.
- (b) All flight crew members of pressurised aeroplanes operating above an altitude where the atmospheric pressure is less than 376 hPa (25000 ft) shall have available at the flight duty station a quick-donning type of oxygen mask which will readily supply oxygen upon demand.

**CAR OPS 2.089 Flight Recorder Operation**

- (a) Flight recorders shall not be switched off during flight time.
- (b) To preserve flight recorder records, flight recorders shall be deactivated upon completion of flight time following an accident or incident. The flight recorders shall not be reactivated before their disposition as determined by the investigating authority.
- (c) The pilot-in-command, and/or the owner/operator, or in the case where it is leased, the lessee, shall ensure, to the extent possible, in the event the aeroplane becomes involved in an accident or incident, the preservation of all related flight recorder records, and if necessary the associated flight recorders, and their retention in safe custody pending their disposition as determined in accordance with CAR 13. Operational checks and evaluations of recordings from the flight recorder systems shall be conducted to ensure the continued serviceability of the recorders.

**CAR OPS 2.090 Procedure for Rate of Climb or Descent**

Unless otherwise specified in an air traffic control instruction, to avoid unnecessary airborne collision avoidance system (ACAS II) resolution advisories in aeroplane at or approaching adjacent altitudes or flight levels, pilots should consider using appropriate procedures to ensure that a rate of climb or descent of less than 8 m/s or 1 500 ft/min (depending on the instrumentation available) is achieved throughout the last 300 m (1000 ft) of climb or descent to the assigned altitude or flight level, when made aware of another aeroplane at or approaching an adjacent altitude or flight level.

**CAR OPS 2.091 Operating Procedures for Landing Performance**

An approach to land shall not be continued below 300 m (1000 ft) above aerodrome elevation unless the pilot-in-command is satisfied that, with the runway surface condition information available, the aeroplane performance information indicates that a safe landing can be made.

**CAR OPS 2.092 Duties of Pilot-in-Command**

In addition to the duties of the pilot-in-command specified in CAR OPS 2.029;

- (a) The pilot-in-command shall ensure that the required checklists are complied with in detail.  
The pilot-in-command shall be responsible for notifying the nearest appropriate authority by the quickest available means of any accident involving the aeroplane, resulting in serious injury or death of any person

or substantial damage to the aeroplane or property. In the event that the pilot in-command is incapacitated the operator shall take the forgoing action.

- (b) The pilot-in-command shall be responsible for reporting all known or suspected defects in the aeroplane, to the operator, at the termination of the flight.
- (c) The pilot-in-command shall be responsible for the journey log book or the general declaration containing the required information.

### **CAR OPS 2.093 In-flight Fuel Management**

In addition to the requirements specified in OPS 2.028;

- (a) The operator shall establish policies and procedures to ensure that in-flight fuel checks and fuel management are performed.
- (b) The pilot-in-command shall request delay information from ATC when unanticipated circumstances may result in landing at the destination aerodrome with less than the final reserve fuel plus any fuel required to proceed to an alternate aerodrome or the fuel required to operate to an isolated aerodrome.

Note.— The protection of final reserve fuel is intended to ensure a safe landing at any aerodrome when unforeseen occurrences may not permit safe completion of an operation as originally planned. Guidance on flight planning including the circumstances that may require re-analysis, adjustment and/or re- planning of the planned operation before take-off or enroute, is contained in the Flight Planning and Fuel Management (FPFM) Manual (Doc 9976).

### **CAR OPS 2.093A Cabin baggage (take-off and landing)**

The operator shall specify procedures to ensure that all baggage carried onto an aeroplane and taken into the passenger cabin is adequately and securely stowed.

### **Appendix 1 to CAR OPS 2.077 Content of an Operations Manual**

(See CAR OPS 2.077)

The following is the suggested content of a company operations manual. It may be issued in separate parts corresponding to specific aspects of an operation. It should include the instructions and information necessary to enable the personnel concerned to perform their duties safely and shall contain at least the following information:

- (1) table of contents;
- (2) amendment control page and list of effective pages, unless the entire document is reissued with each amendment and;
- (3) the document has an effective date on it;

- (4) duties, responsibilities and succession of management and operating personnel;
- (5) operator safety management system;
- (6) operational control system;
- (7) MEL procedures (where applicable);
- (8) normal flight operations;
- (9) standard operating procedures (SOPs);
- (10) weather limitations;
- (11) flight and duty time limitations;
- (12) emergency operations;
- (13) accident/incident considerations;
- (14) personnel qualifications and training;
- (15) record keeping;
- (16) a description of the maintenance control system;
- (17) security procedures (where applicable);
- (18) performance operating limitations;
- (19) use/protection of FDR/CVR records (where applicable);
- (20) handling of dangerous goods;
- (21) use of automatic landing systems, a HUD or equivalent displays and EVS, SVS or CVS equipment as applicable; and
- (22) additional information requested by the Authority.

**SUBPART D – PERFORMANCE OPERATING LIMITATIONS****CAR OPS 2.094 Aeroplanes**

- (a) An aeroplane shall be operated in compliance with the terms of its certificate of airworthiness and within the approved operating limitations contained in its flight manual.
- (b) The Authority, as the State of Registry, shall take such precautions as are reasonably possible to ensure that the general level of safety contemplated by these provisions is maintained under all expected operating conditions, including those not covered specifically by the provisions of this Subpart.
- (c) A flight shall not be commenced unless the performance information provided in the flight manual indicates that CAR OPS 2.095 to CAR OPS 2.098 can be complied with for the flight to be undertaken.
- (d) In applying the requirements of this chapter, account shall be taken of all factors that significantly affect the performance of the aeroplane (such as: mass, operating procedures, the pressure altitude appropriate to the elevation of the aerodrome, runway slope, the ambient temperature, wind, and surface conditions of the runway at the expected time of use, i.e. presence of slush, water and/or ice, for landplanes, water surface condition for seaplanes). Such factors shall be taken into account directly as operational parameters or indirectly by means of allowances or margins, which may be provided in the scheduling of performance data or in the comprehensive and detailed code of performance in accordance with which the aeroplane is being operated.

**CAR OPS 2.095 Mass limitations**

- (a) The mass of the aeroplane at the start of take-off shall not exceed the mass at which CAR OPS 2.096 is complied with, nor the mass at which CAR OPS 2.097 and CAR OPS 2.098 are complied with, allowing for expected reductions in mass, for such fuel jettisoning or use of alternate aerodromes as the flight proceeds.
- (b) In no case shall the mass at the start of take-off exceed the maximum take-off mass specified in the flight manual for the pressure altitude appropriate to the elevation of the aerodrome, and if used as a parameter to determine the maximum take-off mass, any other local atmospheric condition.
- (c) In no case shall the estimated mass for the expected time of landing at the aerodrome of intended landing and at any destination alternate aerodrome, exceed the maximum landing mass specified in the flight manual for the pressure altitude appropriate to the elevation of those aerodromes, and if used as a parameter to determine the maximum landing mass, any other local atmospheric condition.
- (d) In no case shall the mass at the start of take-off, or at the expected time of landing at the aerodrome of intended landing and at any destination alternate aerodrome, exceed the relevant maximum masses at

which compliance has been demonstrated with the applicable noise certification Standards in ICAO Annex 16, Volume I, unless otherwise authorised in exceptional circumstances for a certain aerodrome or a runway where there is no noise disturbance problem, by the competent authority of the State in which the aerodrome is situated.

**CAR OPS 2.096 Take-off**

- (a) The aeroplane shall be able, in the event of a critical engine failing at any point in the take-off, either to discontinue the take-off and stop within either the accelerate-stop distance available or the runway available, or to continue the take-off and clear all obstacles along the flight path by an adequate margin until the aeroplane is in a position to comply with CAR OPS 2.097.
- (b) In determining the length of the runway available, account shall be taken of the loss, if any, of runway length due to alignment of the aeroplane prior to take-off.

**CAR OPS 2.097 En-route — One Engine Inoperative**

The aeroplane shall be able, in the event of the critical engine becoming inoperative at any point along the route or planned diversions therefrom, to continue the flight to an aerodrome at which the Standard of CAR OPS 2.098 can be met, without flying below the minimum obstacle clearance altitude at any point.

**CAR OPS 2.098 Landing**

The aeroplane shall, at the aerodrome of intended landing and at any alternate aerodrome, after clearing all obstacles in the approach path by a safe margin, be able to land, with assurance that it can come to a stop or, for a seaplane, to a satisfactorily low speed, within the landing distance available. Allowance shall be made for expected variations in the approach and landing techniques, if such allowance has not been made in the scheduling of performance data.

**SUBPART E – INSTRUMENTS, EQUIPMENT AND FLIGHT DOCUMENTS****CAR OPS 2.099 General**

- (a) Where a master minimum equipment list (MMEL) is established for the aeroplane type, the operator shall include in the operations manual a minimum equipment list (MEL) approved by the Authority, as the State of Registry of the aeroplane, which will enable the pilot-in-command to determine whether a flight may be commenced or continued from any intermediate stop should any instrument, equipment or systems become inoperative.
- (b) A flight shall not be commenced when any of the aeroplane's instruments, items of equipment, or functions, required for the intended flight are inoperative or missing, unless:
  - (1) the aeroplane is operated in accordance with the operator's minimum equipment list (MEL); or
  - (2) the operator is approved by the Authority to operate the aeroplane within the constraints of the master minimum equipment list (MMEL); or
  - (3) the aeroplane is subject to a permit to fly issued in accordance with the applicable airworthiness requirements.

**CAR OPS 2.100 Aeroplanes on all Flights**

In addition to the requirements contained in Part I, Subpart E, an aeroplane shall be equipped with:

- (a) accessible and adequate medical supplies appropriate to the number of passengers the aeroplane is authorised to carry.
- (b) first-aid kits.
- (c) a safety harness for each flight crew seat. The safety harness for each pilot seat shall incorporate a device which will automatically restrain the occupant's torso in the event of rapid deceleration;

*Note 1: The safety harness for each pilot seat should incorporate a device to prevent a suddenly incapacitated pilot from interfering with the flight controls.*

*Note 2: Safety harness includes shoulder straps and a seat belt which may be used independently.*

- (d) means of ensuring that the following information and instructions are conveyed to passengers:
  - (1) when seat belts are to be fastened;
  - (2) when and how oxygen equipment is to be used if the carriage of oxygen is required;
  - (3) restrictions on smoking;
  - (4) location and use of life jackets or equivalent individual flotation devices where their carriage is required;

- (5) location of emergency equipment; and
- (6) location and method of opening emergency exits.

**CAR OPS 2.101 Manuals and Checklists**

An aeroplane shall carry:

- (a) the operations manual, or those parts of it that pertain to flight operations, including operating procedures for conducting instrument approaches;
- (b) the flight manual, or other documents containing required performance data and any other information necessary for the operation of the aeroplane within the terms of its certificate of airworthiness, unless these data are available in the operations manual; and
- (c) the checklists required by CAR OPS 2.080.

**CAR OPS 2.102 Cockpit Voice Recorder**

(See Appendix 1 to CAR OPS 2.102/CAR OPS 2.104)

(See Appendix 1 to CAR OPS 2.102 to 2.104 inclusive)

(See Appendix 2 to CAR OPS 2.102 to 2.104 inclusive)

- (a) The following aeroplanes shall be equipped with a CVR:
  - (1) aeroplanes with an MCTOM of more than 27000 kg for which the individual certificate of airworthiness is first issued on or after 01 January 1987;
  - (2) turbine-engined aeroplanes with an MCTOM of more than 5 700 kg, which are:
    - (i) certified to be operated with more than one pilots; and
    - (ii) for which a type certificate is first issued on or after 01 January 2016.
- (b) All CVRs shall retain the information recorded during at least the last 2 hours of their operation.
- (c) All aeroplanes of a maximum certificated take-off mass of over 27000 kg for which the individual certificate of airworthiness is first issued on or after 01 January 2022 shall be equipped with a CVR capable of retaining the information recorded during at least the last 25 hours of its operation.
- (d) CVRs and CARS shall not use magnetic tape or wire.
- (e) All aeroplanes that are required to be equipped with CARS, and for which the individual certificate of airworthiness is first issued on or after 01 January 2025, shall be equipped with a CARS which shall retain the information recorded during at least the last two hours of their operation.



**CAR OPS 2.103 Flight Data Recorder**

(See Appendix 1 to CAR OPS 2.102 to 2.104 inclusive)

(See Appendix 2 to CAR OPS 2.102 to 2.104 inclusive)

(See Appendix 1 to CAR OPS 2.103/CAR OPS 2.104)

(See Appendix 2 to CAR OPS 2.103/CAR OPS 2.104)

(See Appendix 1 to CAR OPS 2.103)

- (a) All multi-engine, turbine-powered aeroplanes of a MCTOM of over 5 700 kg and having a passenger seating configuration, excluding any pilot seats of 10 or more, for which the individual certificate of airworthiness is first issued on or after 01 January 2005 shall be equipped with a FDR capable of recording the parameters 1 – 78 listed in the Appendix 1 to CAR OPS 2.103 unless exempted under sub-paragraph (g) below;
- (b) All aeroplanes of a MCTOM of over 5 700 kg and first issued with an individual certificate of airworthiness on or after 01 January 2016 shall be equipped with a FDR that uses a digital method of recording and storing data and for which a method of readily retrieving that data from the storage medium is available.
- (c) All aeroplanes of a maximum certificated take-off mass of over 5 700 kg for which the application for type certification is submitted to a Contracting State on or after 01 January 2023 shall be equipped with a FDR capable of recording at least the 82 parameters listed in Appendix 1 to CAR OPS 2.103.
- (d) All aeroplanes of a maximum certificated take-off mass of over 27000 kg for which the individual certificate of airworthiness is first issued on or after 01 January 1989 shall be equipped with a FDR capable of recording the parameters 1 – 32 listed in the Appendix 1 to CAR OPS 2.103 unless exempted under sub-paragraph (g) below;
- (e) FDRs, ADRS, AIRs or AIRS shall not use engraving metal foil, frequency modulation (FM), photographic film or magnetic tape.
- (f) All FDRs shall retain the information recorded during at least the last 25 hours of their operation.
- (g) When FDRs are required to be installed, those FDRs that meet the current parameter certification requirements of the FAA, Transport Canada or EASA in respect to private air transport operations, shall be exempt from the parameter requirements of CAR OPS 2.103 and Appendix 1 to CAR OPS 2.103.

*Note 1: The application for type certification is submitted to a Contracting State” refers to the date of application of the original “Type Certificate” for the aeroplane type, not the date of certification of particular aeroplane variants or derivative models.*

*Note 2: The documentation requirement concerning FDR and ADRS parameters provided by operators to accident investigation authorities should be in electronic format and take account of industry specifications.*

**CAR OPS 2.104 Data Link Recording**

(See Appendix 1 to CAR OPS 2.104)

- (a) All aeroplane for which the individual C of A is first issued on or after 01 January 2016 which use any of the data link communication application referred to in Appendix 1 to CAR OPS 2.104 and are required to carry a CVR shall record the data link communication messages on a crash-protected flight recorder.
- (b) All aeroplanes for which the individual certificate of airworthiness was first issued before 01 January, 2016, that are required to carry a CVR and are modified on or after 01 January 2016 to install and use any of the data link communication application referred to in Appendix 1 to CAR OPS 2.104 shall record the data link communication messages on a crash-protected flight recorder unless the installed the data link communication equipment is compliant with a type certificate issued or aircraft modification first approved prior to 01 January, 2016.

*Note 1: A Class B AIR could be a means for recording data link communications applications messages to and from the aeroplane where it is not practical or is prohibitively expensive to record those data link communications applications messages on FDR or CVR.*

*Note 2: The “aircraft modifications” refer to modifications to install the data link communications equipment on the aircraft (e.g. structural, wiring).*

- (c) The recorder shall use a digital method of recording and storing data and information and a method for readily retrieving that data. The recording method shall allow the data to match the data recorded on the ground and also be correlated to the recorded cockpit audio.
- (d) The minimum recording duration shall be equal to the duration of the CVR.
- (e) The requirements applicable to the start and stop logic of the recorder are the same as the requirements applicable to the start and stop logic of the CVR contained in Appendix 1 to CAR OPS 2.104.

**CAR OPS 2.105 Flight Data and Cockpit Voice Combination Recorder**

Compliance with CVR requirements and FDR requirements may be achieved by:

- (a) one flight data and cockpit voice combination recorder if the aeroplane has to be equipped with a CVR or an FDR; or
- (b) two flight data and cockpit voice combination recorders if the aeroplane has to be equipped with a CVR and an FDR.
- (c) All turbine-engined aeroplanes of a maximum certificated take-off mass of over 5 700 kg for which the application for type certification is submitted to a Contracting State on or after 1 January 2016 and required to be operated by more than one pilot shall be equipped with a CVR.

- (d) All aeroplanes of a maximum certificated take-off mass of over 27 000 kg for which the individual certificate of airworthiness is first issued on or after 1 January 2022 shall be equipped with a CVR capable of retaining the information recorded during at least the last 25 hours of its operation.
- (e) Recommendation. — All aeroplanes of a maximum certificated take-off mass of over 5 700 kg, up to and including 27 000 kg, for which the individual certificate of airworthiness is first issued on or after 1 January 1987, should be equipped with a CVR.
- (f) Recommendation. — All aeroplanes of a maximum certificated take-off mass over 5 700 kg, required to be equipped with an FDR and a CVR, may alternatively be equipped with two combination recorders (FDR/CVR).

#### **CAR OPS 2.106 Long-Range Over-Water Flights**

In addition to the requirements specified in CAR OPS 2.041, each life jacket and equivalent individual flotation device shall be equipped with a means of electric illumination for the purpose of facilitating the location of persons, except for individual flotation devices other than life jackets.

#### **CAR OPS 2.107 Icing Conditions**

Aeroplanes shall be equipped with suitable de-icing and/or anti-icing devices when operated in circumstances in which icing conditions are reported to exist or are expected to be encountered.

#### **CAR OPS 2.108 Operations in Accordance with the Instrument Flight Rules**

In addition to the requirements contained in CAR OPS 2.039, aeroplanes when operated in accordance with the instrument flight rules or when the aeroplane cannot be maintained in a desired attitude without reference to one or more flight instruments, shall be equipped with two independent altitude measuring and display systems.

#### **CAR OPS 2.109 Emergency Power Supply for Electrically Operated Attitude Indicating Instruments**

- (a) Aeroplanes of a maximum certificated take-off mass of over 5 700 kg newly introduced into service after 01 January 1975 shall be fitted with an emergency power supply, independent of the main electrical generating system, for the purpose of operating and illuminating, for a minimum period of 30 minutes, an attitude indicating instrument (artificial horizon), clearly visible to the pilot-in-command. The emergency power supply shall be automatically operative after the total failure of the main electrical

generating system and clear indication shall be given on the instrument panel that the attitude indicator(s) is being operated by emergency power.

*Note: Aeroplane with advanced cockpit automation systems (glass cockpits) should have system redundancy that provides the flight crew with attitude, heading, airspeed and altitude indications in case of failure of the primary system or display.*

- (b) Instruments that are used by any one pilot shall be so arranged as to permit the pilot to see their indications readily from his or her station, with the minimum practicable deviation from the position and line of vision normally assumed when looking forward along the flight path.

#### **CAR OPS 2.110 Weather-detecting Equipment**

Pressurised aeroplanes when carrying passengers shall be equipped with operative weather-detecting equipment capable of detecting thunderstorms whenever such aeroplanes are being operated in areas where such conditions may be expected to exist along the route either at night or under instrument meteorological conditions.

#### **CAR OPS 2.111 Operations above 15000 m (49000 ft) - Radiation Indicator**

Aeroplanes intended to be primarily operated above 15000 m (49000 ft) should carry equipment to measure and indicate continuously the dose rate of total cosmic radiation being received (i.e. the total of ionizing and neutron radiation of galactic and solar origin) and the cumulative dose on each flight. The display unit of the equipment shall be readily visible to a flight crew member.

#### **CAR OPS 2.112 Passenger and Cabin Crew Seats**

- (a) Aeroplanes for which the individual certificate of airworthiness is first issued on or after 01 January 1981 shall be equipped with a forward or rearward facing seat (within 15 degrees of the longitudinal axis of the aeroplane), fitted with a safety harness for the use of each cabin crew member required to effect a safe and expeditious emergency evacuation.
- (b) Cabin crew seats provided shall be located near floor level and other emergency exits as required by the Authority, as the State of Registry, for emergency evacuation.

**CAR OPS 2.113 Airborne Collision Avoidance System (ACAS)**

All turbine-engined aeroplanes of a maximum certificated take-off mass in excess of 15000 kg or authorised to carry more than 30 passengers, for which the individual airworthiness certificate is first issued after 01 January 2007, shall be equipped with an airborne collision avoidance system (ACAS II) that meets traffic alert and collision avoidance system (TCAS) Version 7.1 as specified in TCA/DO185B or EUROCAE/ED-143.

**CAR OPS 2.114 Pressure-altitude Reporting Transponder**

Aeroplanes shall be equipped with a pressure-altitude reporting transponder which operates in accordance with the relevant provisions of ICAO Annex 10, Volume IV.

**CAR OPS 2.114A Microphones**

All flight crew members required to be on flight deck duty shall communicate through boom or throat microphones below the transition level/altitude.

**CAR OPS 2.115 Ground Proximity Warning Systems (GPWS)**

In addition to CAR OPS 2.050 (b) and (c);

- (a) All turbine-engined aeroplanes of a maximum certificated take-off mass in excess of 5 700 kg shall be equipped with a ground proximity warning system which has a forward-looking terrain avoidance function.
- (b) A ground proximity warning system installed in turbine-engined aeroplanes of a maximum certificated take-off mass in excess of 5 700 kg for which the individual certificate of airworthiness was first issued after 01 January 2011 shall provide, as a minimum, warnings of at least the following circumstances;
  - (1) excessive descent rate;
  - (2) excessive terrain closure rate;
  - (3) excessive altitude loss after take-off or go-around;
  - (4) unsafe terrain clearance while not in landing configuration;
    - (i) gear not locked down;
    - (ii) flaps not in a landing position; and
  - (5) excessive descent below the instrument glide path.

**Appendix 1 to CAR OPS 2.102****Cockpit Voice Recorder (CVR) and Cockpit Audio Recording System (CARS)****(1) Start and stop logic**

The CVR or CARS shall start to record prior to the aeroplane moving under its own power and record continuously until the termination of the flight when the aeroplane is no longer capable of moving under its own power. In addition, depending on the availability of electrical power, the CVR or CARS shall start to record as early as possible during the cockpit checks prior to engine start at the beginning of the flight until the cockpit checks immediately following engine shutdown at the end of the flight.

**(2) Signals to be recorded**

(a) The CVR shall record simultaneously on four separate channels, or more, at least the following:

- (i) voice communication transmitted from or received in the aeroplane by radio;
- (ii) aural environment on the flight deck;
- (iii) voice communication of flight crew members on the flight deck using the aeroplane's interphone system, if installed;
- (iv) voice or audio signals identifying navigation or approach aids introduced in the headset or speaker;
- (v) digital communications with ATS, unless recorded by the FDR; and

**(3) The preferred CVR audio allocation should be as follows:**

- (a) pilot-in-command audio panel;
- (b) co-pilot audio panel;
- (c) additional flight crew positions and time reference; and
- (d) cockpit area microphone.

**(4) The CARS shall record simultaneously on two separate channels, or more, at least the following:**

- (a) voice communication transmitted from or received in the aeroplane by radio;
- (b) aural environment on the flight deck; and
- (c) voice communication of flight crew members on the flight deck using the aeroplane's interphone system, if installed.

**(5) The preferred CARS audio allocation should be as follows:**

- (a) voice communication; and
- (b) aural environment on the flight deck.

**Appendix 1 to CAR OPS 2.102 to CAR OPS 2.104 Inclusive****Flight Recorders – General**

*Note 1—The following applies to all crash protected flight recorders which comprise one or more of the following:*

- (1) *a flight data recorder (FDR),*
- (2) *a cockpit voice recorder (CVR)*
- (3) *an airborne image recorder (AIR),*
- (4) *a data link recorder (DLR).*

*When image or data link information is required to be recorded on a crash-protected flight recorder, it is permissible to record it on either the CVR or the FDR.*

*Note 2—The following applies to all lightweight flight recorders which comprise one or more of the following:*

- (1) *an aircraft data recording system (ADRS),*
- (2) *a cockpit audio recording system (CARS),*
- (3) *an airborne image recording system (AIRS)*
- (4) *a data link recording system (DLRS).*

*Note 3 — For aeroplanes for which the application for type certification is submitted to a Contracting State before 1 January 2016, specifications applicable to crash-protected flight recorders may be found in EUROCAE ED-112, ED-56A, ED-55, Minimum Operational Performance Specifications (MOPS), or earlier equivalent documents.*

*Note 4 — For aeroplanes for which the application for type certification is submitted to a Contracting State on or after 1 January 2016, specifications applicable to crash-protected flight recorders may be found in EUROCAE ED-112A, Minimum Operational Performance Specification (MOPS), or equivalent documents.*

*Note 5— Specifications applicable to lightweight flight recorders may be found in EUROCAE ED-155, Minimum Operational Performance Specification (MOPS), or equivalent documents.*

*When image or data link information is required to be recorded on a lightweight flight recorder, it is permissible to record it on either the CVRS or the ADRS.*

- (1) Non-deployable flight recorder containers shall be painted a distinctive orange colour;
- (2) Non-deployable crash protected flight recorder containers shall;
  - (a) carry reflective material to facilitate their location; and
  - (b) have a device to assist in locating that recorder in water and, not later than 01 January, 2019, have securely attached an automatically activated underwater locating device operating at a frequency of 37.5 kHz that operates for a minimum of 90 days.
- (3) Automatic deployable flight recorder containers shall:
  - (a) be painted a distinctive orange colour; however, the surface visible from outside the aeroplane may be of another colour;

- (b) carry reflective material to facilitate their location; and
- (c) have an integrated automatically activated ELT.
- (4) The flight recorder systems shall be installed so that:
  - (a) the probability of damage to the recordings is minimised;
  - (b) there is an aural or visual means for pre-flight checking that the flight recorder systems are operating properly; and
  - (c) if the flight recorder systems have an erasure device, the installation shall be designed to prevent operation of the device during flight time or crash impact; and
  - (d) an aeroplane for which the individual certificate of airworthiness is first issued on or after 01 January 2023, a flight crew-operated erase function shall be provided on the flight deck which, when activated, modifies the recording of a CVR and AIR so that it cannot be retrieved using normal replay or copying techniques. The installation shall be designed to prevent activation during flight. In addition, the probability of an inadvertent activation of an erase function during an accident shall also be minimised.

*Note: The erase function is intended to prevent access to CVR and AIR recordings by normal replay or copying means, but would not prevent accident investigation authorities access to such recordings by specialised replay or copying techniques.*

- (5) The crash-protected flight recorder shall be installed so that they receive electrical power from a bus that provides the maximum reliability for operation of the flight recorder systems without jeopardising service to essential or emergency loads.
- (6) The lightweight flight recorders shall be connected to a power source having the characteristics which ensure proper and reliable recording in the operational environment.
- (7) The flight recorder systems, when tested by methods approved by the appropriate certificating authority, shall be demonstrated to be suitable for the environmental extremes over which they are designed to operate.
- (8) Means shall be provided for an accurate time correlation between the flight recorder systems recordings.
- (9) The flight recorder system manufacturer shall provide the appropriate certificating authority with the following information in respect of the flight recorder systems:
  - (1) manufacturer's operating instructions, equipment limitations and installation procedures;
  - (2) parameter origin or source and equations which relate counts to units of measurement;
  - (3) manufacturer's test reports; and
  - (4) detailed information to ensure the continued serviceability of the flight recorder system.
- (10) The holder of the airworthiness approval for the installation design of the flight recorder system shall make available the relevant continuing airworthiness information to the operator of the aeroplane to be incorporated in the continuing airworthiness maintenance programme. This continuing airworthiness information shall cover in detail all the tasks required to ensure the continued serviceability of the flight



recorder system.

*Note: The flight recorder system is composed of the flight recorder as well as any dedicated sensors, hardware and software that provide information required under this Appendix.*

## **Appendix 2 to CAR OPS 2.102 to CAR OPS 2.104 Inclusive**

### **Inspection of Flight Recorder Systems**

- (1) Prior to the first flight of the day, the built-in test features for the flight recorders and flight data acquisition unit (FDAU), when installed, shall be monitored by manual and/or automatic checks.
- (2) FDR systems or ADRS, CVR systems or CARS, and AIR systems or AIRS shall have recording inspection intervals of one year. This period may be extended by the Authority to two years provided these systems have demonstrated a high integrity of serviceability and self-monitoring.
- (3) DLR systems or DLRS shall have recording inspection intervals of two years. This period may be extended by the Authority to four years provided these systems have demonstrated a high integrity of serviceability and self-monitoring.
- (4) Recording inspections shall be carried out as follows:
  - (a) an analysis of the recorded data from the flight recorders shall ensure that the recorder operates correctly for the nominal duration of the recording;
  - (b) the FDR or ADRS recording from a complete flight shall be examined in engineering units to evaluate the validity of all recorded parameters. Particular attention shall be given to parameters from sensors dedicated to the FDR or ADRS. Parameters taken from the aeroplane's electrical bus system need not be checked if their serviceability can be detected by other aeroplane systems;
  - (c) the readout facility shall have the necessary software to accurately convert the recorded values to engineering units and to determine the status of discrete signals;
  - (d) an annual examination of the recorded signal on the CVR or CARS shall be carried out by replay of the CVR or CARS recording. While installed in the aeroplane, the CVR or CARS shall record test signals from each aeroplane source and from relevant external sources to ensure that all required signals meet intelligibility standards;
  - (e) where practicable, during the examination, a sample of in-flight recordings of the CVR or CARS shall be examined for evidence that the intelligibility of the signal is acceptable; and
  - (f) an examination of the recorded images on the AIR or AIRS shall be carried out by replay of the AIR or AIRS recording. While installed in the aeroplane, the AIR or AIRS shall record test images from each aeroplane source and from relevant external sources to ensure that all required images meet recording quality standards.
  - (g) an examination of the recorded messages on the DLR or DLRS shall be carried out by replay of the

DLR or DLRS recording.

- (5) A flight recorder system shall be considered unserviceable if there is a significant period of poor quality data, unintelligible signals, or if one or more of the mandatory parameters is not recorded correctly.
- (6) A report of the recording inspection shall be made available on request to regulatory authorities for monitoring purposes
- (7) Calibration of the FDR system:
  - (a) for those parameters which have sensors dedicated only to the FDR and are not checked by other means, recalibration shall be carried at an interval determined by the continuing airworthiness information for the FDR system. In the absence of such information, a recalibration shall be carried out at least every five years. The recalibration shall determine any discrepancies in the engineering conversion routines for the mandatory parameters and to ensure that parameters are being recorded within the calibration tolerances; and
  - (b) when the parameters of altitude and airspeed are provided by sensors that are dedicated to the FDR system, there shall be a recalibration performed at an interval determined by the continuing airworthiness information for the FDR system. In the absence of such information, a recalibration shall be carried out at least every two years.

#### **Appendix 1 to CAR OPS 2.103**

Flight Data Recorder (FDR) and Aircraft data recording systems (ADRS)

(See CAR OPS 2.103)

##### **(1) Start and Stop Logic**

The FDR or ADRS shall start to record prior to the aeroplane moving under its own power and record continuously until the termination of the flight when the aeroplane is no longer capable of moving under its own power.

##### **(2) Parameters to be Recorded**

- (a) The parameters that satisfy the requirements for FDRs are listed in the paragraphs below in Appendix 1 to CAR OPS 2.103. The number of parameters to be recorded shall depend on aeroplane complexity. The parameters without an asterisk (\*) are mandatory parameters which shall be recorded regardless of aeroplane complexity. In addition, the parameters designated by an asterisk (\*) shall be recorded if an information data source for the parameter is used by aeroplane systems or the flight crew to operate the aeroplane. However, other parameters may be substituted with due regard to the aeroplane type and the characteristics of the recording equipment.
- (b) If further FDR recording capacity is available, recording of the following additional information

shall be considered:

- (i) operational information from electronic display systems, such as electronic flight instrument systems (EFIS), electronic centralized aeroplane monitor (ECAM) and engine indication and crew alerting system (EICAS). Use the following order of priority:
    - a. parameters selected by the flight crew relating to the desired flight path, e.g. barometric pressure setting, selected altitude, selected airspeed, decision height, and auto flight system engagement and mode indications if not recorded from another source;
    - b. display system selection/status, e.g. SECTOR, PLAN, ROSE, NAV, WXR, COMPOSITE, COPY, ETC.;
    - c. warnings and alerts; and
    - d. the identity of displayed pages for emergency procedures and checklists; and
    - e. additional engine parameters (EPR, N1, fuel flow etc.)
  - (ii) retardation information including brake application for use in the investigation of landing overruns and rejected take-offs.
- (c) The parameters that satisfy the requirements for flight path and speed as displayed to the pilot(s) are listed below. The parameters without an (\*) are mandatory parameters which shall be recorded. In addition, the parameters designated by an (\*) shall be recorded if an information source for the parameter is displayed to the pilot and is practicable to record:
- Pressure altitude
  - Indicated airspeed or calibrated airspeed
  - Heading (primary flight crew reference)
  - Pitch attitude
  - Roll attitude
  - Engine thrust/power
  - Landing-gear status\*
  - Total or outside air temperature\*
  - Time\*
  - Navigation data\*: drift angle, wind speed, wind direction, latitude/longitude
  - Radio altitude\*
- (d) The parameters that satisfy the requirements for ADRS are the first 7 parameters listed in Appendix 2 to CAR OPS 2.103.
- (e) If further ADRS recording capacity is available, the recording of any parameters from 8 onwards defined in Appendix 2 to CAR OPS 2.103 shall be considered.
- (3) Additional Information

- (a) The measurement range, recording interval and accuracy of parameters on installed equipment shall be verified by methods approved by the appropriate certificating authority.
- (b) Documentation concerning parameter allocation, conversion equations, periodic calibration and other serviceability/maintenance information shall be maintained by the operator/owner. The documentation needs to be sufficient to ensure that accident investigation authorities have the necessary information to read out the data in engineering units.

**Appendix 2 to CAR OPS 2.103****Airborne Image Recorder (AIR) and Airborne Image Recording System (AIRS)****(1) Start and Stop Logic**

The AIR or AIRS shall start to record prior to aeroplane moving under its own power and record continuously until the termination of the flight when the aeroplane is no longer capable of moving under its own power. In addition, depending on the availability of electrical power, the AIR or AIRS shall start to record as early as possible during the cockpit checks prior to engine start at the beginning of the flight until the cockpit checks immediately following engine shutdown at the end of the flight.

**(2) Classes**

- (a) A Class A AIR or AIRS captures the general cockpit area in order to provide data supplemental to conventional flight recorders.

*Note 1: To respect crew privacy, the cockpit area view may be designed as far as practical to exclude the head and shoulders of crew members whilst seated in their normal operating position.*

*Note 2: There are no provisions for Class A AIR or AIRS in this document.*

- (b) A Class B AIR or AIRS captures data link message displays.

- (c) A Class C AIR or AIRS captures instruments and control panels.

*Note: A Class C AIR or AIRS may be considered as a means for recording flight data where it is not practical or is prohibitively expensive to record on an FDR or an ADRS, or where an FDR is not required.*

**Appendix 1 to CAR OPS 2.104****Data Link Recorder (DLR) Applications to be Recorded**

- (1) Where the aeroplane flight path is authorised or controlled through the use of data link messages, all data link messages, both uplinks (to the aeroplane) and downlinks (from the aeroplane), shall be recorded on the aeroplane. As far as practicable, the time the messages were displayed to the flight crew and the time of the responses shall be recorded.

*Note: Sufficient information to derive the content of the data link communications message and the time*

*the messages were displayed to the flight crew is needed to determine an accurate sequence of events on board the aeroplane.*

- (2) Messages applying to the applications listed below shall be recorded. Applications without the asterisk (\*) are mandatory applications which shall be recorded regardless of the system complexity. Applications with an (\*) shall be recorded only as far as is practicable given the architecture of the system.

(3)

Item No.	Application type	Application description	Recording content
1	Data link initiation	This includes any application used to log on to or initiate data link services. In FANS-1/A and ATN, these are ATS facilities notification (AFN) and context management (CM) respectively.	C
2	Controller/ pilot communication	This includes any application used to exchange requests, clearances, instructions and reports between the flight crew and controllers on the ground. In FANS-1/A and ATN, this includes the CPDLC application. It also includes applications used for the exchange of oceanic (OCL) and departure clearances (DCL) as well as data link delivery of taxi clearances.	C
3	Addressed surveillance	This includes any surveillance application in which the ground sets up contracts for delivery of surveillance data. In FANS-1/A and ATN, this includes the automatic dependent surveillance – contract (ADS-C) application. Where parametric data are reported within the message they shall be recorded unless data from the same source are recorded on the FDR.	C
4	Flight information	This includes any services used for delivery of flight information to specific aircraft. This includes, for example, data link aviation weather report service (D-METAR), data link-automatic terminal service (D-ATIS). Digital Notice to Airmen (D-NPTAM) and other textual data link services.	C
5	Aircraft broadcast surveillance	This includes elementary and enhanced surveillance systems, as well as automatic dependent surveillance – broadcast (ADS-B) output data. Where parametric data sent by the aeroplane are reported within the message they shall be recorded unless data from the same source are recorded on the FDR.	M*
6	Aeronautical operational control data	This includes any application transmitting or receiving data used for aeronautical operational control purposes (per the ICAO definition of operational control).	M*

Key:

C: Complete contents recorded.

M: Information that enables correlation to any associated records stored separately from the aeroplane.

\*: Application to be recorded only as far as is practicable given the architecture of the system.

## Appendix 1 to CAR OPS 2.103

## Parameter Characteristics for Flight Data Recorders

Serial No.	Parameter	Measurement Range	Sampling Interval in seconds	Accuracy limits (sensor input compared to FDR readout)	Recording resolutions
1	Time (UTC when available, otherwise relative time count or GNSS time sync)	24 hours	4	$\pm 0.125\%$ per hour	1 second
2	Pressured altitude	-300 m (-1 000 ft) to maximum certificated altitude of aircraft +1500 m (+5000 ft)	1	$\pm 30$ m to $\pm 200$ m ( $\pm 100$ ft to $\pm 700$ ft)	1.5 m (5 ft)
3	Indicated airspeed or calibrated airspeed	95km/h (50 kt) to max $V_{SO}$ (Note 1) Max $V_{SO}$ to $1.2 V_d$ (Note 2)	1	$\pm 5\%$ $\pm 3\%$	1kt (0.5 kt recommended)
4	Heading (primary flight crew reference)	$360^\circ$	1	$\pm 2^\circ$	$0.5^\circ$
5	Normal acceleration	-3 g to +6 g	0.125	$\pm 1\%$ of maximum range excluding a datum error of $\pm 5\%$	0.004 g
6	Pitch attitude	$\pm 75^\circ$ or usable range whichever is greater	0.25	$\pm 2^\circ$	$0.5^\circ$
7	Roll attitude	$\pm 180^\circ$	0.25	$\pm 2^\circ$	$0.5^\circ$
8	Manual radio transmission keying	On-off (one discrete)	1		
9	Power on each engine	Full range	1 (per engine)	$\pm 2\%$	0.2% of full range or the resolution required to operate the aircraft.
10*	Trailing edge flap or cockpit control selection	Full range or each discrete position	2	$\pm 5\%$ or as pilot's indicator	0.5% of full range or the resolution required to operate the aircraft
11*	Leading edge flap or cockpit control selection	Full range or each discrete position	2	$\pm 5\%$ or as pilot's indicator	0.5% of full range or the resolution required to operate the aircraft

Serial No.	Parameter	Measurement Range	Sampling Interval in seconds	Accuracy limits (sensor input compared to FDR readout)	Recording resolutions
12*	Thrust reverser position	Stowed, in transit, and reverse	1 (per engine)		
13*	Ground spoiler / speed brake selection (selection and position)	Full range or each discrete position	1	±2% unless higher accuracy uniquely required	0.2% of full range
14	Outside air temperatures	Sensor range	2	±2°C	0.3°C
15*	Autopilot/auto throttle/AFCS mode and engagement status	A suitable combination of discrete	1		
16	Longitudinal acceleration	±1 g	0.25	±0.015 g excluding a datum error of ±0.05g	0.004 g
17	Lateral acceleration (Note 3)	±1 g	0.25	±0.015 g excluding a datum error of ±0.05g	0.004 g
18	Pilot input and/or control surface position-primary control (pitch, roll, yaw) (Note 4 and 8)	Full range	0.25	±2% unless higher accuracy uniquely required	0.2% of full range or as installed
19	Pitch trim position	Full range	1	±3% unless higher accuracy uniquely required	0.3% of full range or as installed
20*	Radio altitude	-6 m to 750 m (-20 ft to +2500 ft)	1	±0.6m (±2 ft) or ±3% whichever is greater below 150m (500 ft) and ±5% above 150 m (500 ft)	0.3 m (1 ft) below 150 m (500ft) 0.3 m (1 ft) +0.5% of full range above 150 m (500 ft)
21*	Vertical beam deviation (ILS/GNSS/GLS glide path MLS elevation, IRNAV/IAN vertical deviation)	Signal range	1	±3%	0.3% of full range

Serial No.	Parameter	Measurement Range	Sampling Interval in seconds	Accuracy limits (sensor input compared to FDR readout)	Recording resolutions
22*	Horizontal beam deviation (ILS/GNSS/GLS localizer, MLS azimuth, IRNAV/IAN vertical deviation)	Signal range	1	±3%	0.3% of full range
23	Marker beacon passage	Discrete	1		
24	Master warning	Discrete	1		
25	Each NAV receiver frequency selection (Note 5)	Full range	4	As installed	
26*	DME 1 and 2 distance (includes distance to runway threshold (GLS) and distance to missed approach point (IRNAV/IAN) (Note 5 and 6)	0-370 km (0-200 NM)	4	As installed	1852 m (1 NM)
27	Air/ground status	Discrete	1		
28*	GPWS/TAWS/GCAS status (selection of terrain display mode including pop-up display status) and (terrain alerts, both cautions and warnings, and (on/off switch position)	Discrete	1		
29*	Angle of attack	Full range	0.5	As installed	0.3% of full range
30*	Hydraulics, each system (low pressure)	Discrete	2		0.5% of full range
31*	Navigation data (latitude/longitude, ground speed and drift angle) (Note 7)	As installed	1	As installed	



Serial No.	Parameter	Measurement Range	Sampling Interval in seconds	Accuracy limits (sensor input compared to FDR readout)	Recording resolutions
32*	Landing gear or gear selector position	Discrete	4	As installed	
33*	Groundspeed	As installed	1	Data should be obtained from the most accurate system	1 kt
34	Brakes (left and right brake pressure, left and right brake pedal position)	(Maximum metered brake range, discrete or full range)	1	±5%	2% of full range
35*	Additional engine parameters (EPR, N1, indicated vibration level, N2, EGT, fuel flow, fuel cut-off lever position, N3, engine fuel metering valve position)	As installed	Each engine each second	As installed	2% of full range
36*	TCAS/ACAS (traffic alert and collision avoidance system)	Discrete	1	As installed	
37*	Wind shear warning	Discrete	1	As installed	
38*	Selected barometric setting (pilot, co-pilot)	Discrete(s)	1	As installed	
39*	Selected altitude (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
40*	Selected speed (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
41*	Selected Mach (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
42*	Selected vertical speed (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection
43*	Selected heading (all pilot selectable modes of operation)	As installed	1	As installed	Sufficient to determine crew selection

Serial No.	Parameter	Measurement Range	Sampling Interval in seconds	Accuracy limits (sensor input compared to FDR readout)	Recording resolutions
44*	Selected flight path (all pilot selectable modes of operation) (course/DSTRK, path angle, final approach path (IRNAV/IAN))		1	As installed	As installed
45*	Selected decision height	As installed	64	As installed	Sufficient to determine crew selection
46*	EFIS display format (pilot, co-pilot)	Discrete(s)	4	As installed	
47*	Multi-function/engine/alerts display format	Discrete(s)	4	As installed	
48*	AC electrical bus status	Discrete(s)	4	As installed	
49*	DC electrical bus status	Discrete(s)	4	As installed	
50*	Engine bleed valve position	Discrete(s)	4	As installed	
51*	APU bleed valve position	Discrete(s)	4	As installed	
52*	Computer failure	Discrete(s)	4	As installed	
53*	Engine thrust command	As installed	2	As installed	2% of full range
54*	Engine thrust target	As installed	4	As installed	2% of full range
55*	Computed centre of gravity	As installed	64	As installed	1% of full range
56*	Fuel quantity in CG trim tank	As installed	64	As installed	1% of full range
57*	Head up display in use	As installed	4	As installed	
58*	Para visual display on/off	As installed	1	As installed	
59*	Operational stall protection, stick shaker and pusher activation	As installed	1	As installed	

Serial No.	Parameter	Measurement Range	Sampling Interval in seconds	Accuracy limits (sensor input compared to FDR readout)	Recording resolutions
60*	Primary navigation system reference (GNSS, INS, VOR/DME, MLS, Loran C, localizer glideslope)	As installed	4	As installed	
61*	Ice detection	As installed	4	As installed	
62*	Engine warning each engine vibration	As installed	1	As installed	
63*	Engine warning each engine over temperature	As installed	1	As installed	
64*	Engine warning each engine oil pressure low	As installed	1	As installed	
65*	Engine warning each engine over speed	As installed	1	As installed	
66*	Yaw trim surface position	Full range	2	±3% unless higher accuracy uniquely required	0.3% of full range
67*	Roll trim surface position	Full range	2	±3% unless higher accuracy uniquely required	0.3% of full range
68*	Yaw or sideslip angle	Full range	1	±5%	0.5°
69*	De-icing and/or anti-icing systems selection	Discrete(s)	4		
70*	Hydraulic pressure (each system)	Full range	1	±5%	100 psi
71*	Loss of cabin pressure	Discrete	1		
72*	Cockpit trim control input position, Pitch	Full range	1	±5%	0.2% of full range or as installed
73*	Cockpit trim control input position, Roll	Full range	1	±5%	0.2% of full range or as installed

Serial No.	Parameter	Measurement Range	Sampling Interval in seconds	Accuracy limits (sensor input compared to FDR readout)	Recording resolutions
74*	Cockpit trim control input position, Yaw	Full range	1	±5%	0.2% of full range or as installed
75*	All cockpit flight control input forces (control wheel, control column, rudder pedal)	Full range ±311 N (±70 lbf), ± 378 N (±85 lbf), ± 734 N (±165 lbf))	1	±5%	0.2% of full range or as installed
76*	Event marker	Discrete	1		
77*	Date	365 days	64		
78*	Actual navigation performance or estimated position error or estimated position uncertainty	As installed	4	As installed	
79*	Cabin pressure altitude	As installed (0 ft to 40000 ft recommended)	1	As installed	100ft
80*	Aeroplane computed weight	As installed	54	As installed	1% of full range
81*	Flight director command (left flight director pitch command, left flight director roll command, right flight director pitch command, right flight director roll command)	Full range	1	±2%	0.5°
82*	Vertical speed	As installed	0.25	As installed (32 ft/min recommended)	16 ft/min

Notes. –

1.  $V_{SO}$  stalling speed or minimum steady flight speed in the landing configuration is in Section “Abbreviations and Symbols”.
2.  $V_d$  design diving speed.
3. Record sufficient inputs to determine power.  
For aeroplanes with control systems in which movement of a control surface will back drive the pilot’s control “or” applies. For aeroplanes with control systems in which movements of a control surface will

not back drive the pilot's control "and" applies. In aeroplanes with split surfaces, a suitable combination of inputs is acceptable in lieu of recording each surface separately. In aeroplanes with independent pilot input on primary controls, each pilot input on primary controls needs to be recorded separately.

4. If signal available in digital form.
5. Recording of latitude and longitude from INS or other navigation system is a preferred alternative.
6. If signal readily available.
7. It is not intended that aeroplanes issued with an individual certificate of airworthiness before 1 January 2016 be modified to meet the measurement range, maximum sampling and recording intervals, accuracy limits or recording resolution guidance description detailed in this Appendix.

## Appendix 2 to CAR OPS 2.103

### Parameter Characteristics for Aircraft Data Recording Systems (ADRS)

SL. No.	Parameter name	Minimum recording range	Maximum recording interval in seconds	Minimum recording accuracy	Minimum recording resolution	Remarks
1	Heading:					
	a) Heading (Magnetic or Time)	$\pm 180^\circ$	1	$\pm 2^\circ$	$0.5^\circ$	<sup>0</sup> Heading is preferred, if not available, yaw rate shall be recorded
	b) Yaw rate	$\pm 300^\circ/\text{s}$	0.25	$\pm 1\% + \text{drift of } 360^\circ/\text{h}$	$2^\circ/\text{s}$	
2	Pitch:					
	a) Pitch attitude	$\pm 90^\circ$	0.25	$\pm 2^\circ$	$0.5^\circ$	<sup>0</sup> Pitch Attitude is preferred, if not available, pitch rate shall be recorded
	b) Pitch rate	$300^\circ/\text{s}$	0.25	$\pm 1\% + \text{drift of } 360^\circ/\text{h}$	$2^\circ/\text{s}$	

SL. No.	Parameter name	Minimum recording range	Maximum recording interval in seconds	Minimum recording accuracy	Minimum recording resolution	Remarks
3	Roll:					
	a) Roll attitude	±180°	0.25	±2°	0.5°	° If not available, roll rate shall be recorded
	b) Roll rate	300°/s	0.25	±1% + drift of 360°/h	2°/s	
4	Positioning system					
	a) Time	24 hours	1	±0.5 s	0.1 s	UTC time preferred where available
	b) Latitude/longitude	Latitude: ±90° Longitude: ±180°	2 (1 if available)	As installed (0.00015° recommended)	0.00005°	
	c) Altitude	-300 m (-1000 ft) to maximum certificated altitude of aircraft +1500 m (5000ft)	2 (1 if available)	As installed (±15 m (±50ft) recommended)	1.5 m (5 ft)	
	d) Ground speed	0-1000 kt	2 (1 if available)	As installed (±5 kt recommended)	1 kt	
	e) Track	0.360°	2 (1 if available)	As installed (±5 kt recommended)	0.5°	
	f) Estimated error	Available range	2 (1 if available)	As installed	As installed	Shall be recorded if readily available
5	Normal Acceleration	-3 g to +6 g (*)	0.25 (0.125 if available)	As installed (±0.09 g excluding a datum error of ±0.45 g recommended)	0.004 g	

SL. No.	Parameter name	Minimum recording range	Maximum recording interval in seconds	Minimum recording accuracy	Minimum recording resolution	Remarks
6	Longitudinal acceleration	$\pm 1$ g (*)	0.25 (0.125 if available)	As installed ( $\pm 0.015$ g excluding a datum error of $\pm 0.05$ g recommended)	0.004 g	
7	Lateral acceleration	$\pm 1$ g (*)	0.25 (0.125 if available)	As installed ( $\pm 0.015$ g excluding a datum error of $\pm 0.05$ g recommended)	0.004 g	
8	External static pressure (or pressure altitude)	34.4 mb (3.44 in-Hg) to 310.2 mb (31.02 in-Hg) or available sensor range	1	As installed ( $\pm 1$ mb (0.1 in-Hg) or $\pm 30$ m ( $\pm 100$ ft) to $\pm 210$ m ( $\pm 700$ ft) recommended)	0.1 mb (0.01 in-Hg) or 1.5 m (5 ft)	
9	Outside air temperature (or total air temperature)	$-50^{\circ}$ to $+90^{\circ}$ C or available sensor range	2	As installed ( $\pm 2^{\circ}$ C recommended)	$1^{\circ}$ C	
10	Indicated air speed	As the installed pilot display measuring system or available sensor range	1	As installed ( $\pm 3\%$ recommended)	1 kt (0.5 kt recommended)	
11	Engine RPM	Full range including overspeed condition	Each engine each second	As installed	0.2% of full range	
12	Engine oil pressure	Full range	Each engine each second	As installed ( $\pm 5\%$ of full range recommended)	2% of full range	

SL. No.	Parameter name	Minimum recording range	Maximum recording interval in seconds	Minimum recording accuracy	Minimum recording resolution	Remarks
13	Engine oil temperature	Full range	Each engine each second	As installed ( $\pm 5\%$ of full range recommended)	2% of full range	
14	Fuel flow or pressure	Full range	Each engine each second	As installed	2% of full range	
15	Manifold pressure	Full range	Each engine each second	As installed	0.2% of full range	
16	Engine thrust/power/torque parameters required to determine propulsive thrust/power *	Full range	Each engine each second	As installed	0.1% of full range	* Sufficient parameters e.g. EPR/ $N_1$ or torque/ $N_p$ as appropriate to the particular engine shall be recorded to determine power in both normal and reverse thrust. A margin for possible overspeed should be provided.
17	Engine gas generator speed ( $N_g$ )	0-150%	Each engine each second	As installed	0.2% of full range	
18	Free power turbine speed ( $N_f$ )	0-150%	Each engine each second	As installed	0.2% of full range	



SL. No.	Parameter name	Minimum recording range	Maximum recording interval in seconds	Minimum recording accuracy	Minimum recording resolution	Remarks
19	Coolant temperature	Full range	1	As installed ( $\pm 5^{\circ}\text{C}$ recommended)	$1^{\circ}\text{C}$	
20	Main voltage	Full range	Each engine each second	As installed	1 Volt	
21	Cylinder head temperature	Full range	Each cylinder each second	As installed	2% of full range	
22	Flaps position	Full range or each discrete position	2	As installed	$0.5^{\circ}$	
23	Primary flight control surface position	Full range	0.25	As installed	0.2% of full range	
24	Fuel quantity	Full range	4	As installed	1% of full range	
25	Exhaust gas temperature	Full range	Each engine each second	As installed	2% of full range	
26	Emergency voltage	Full range	Each engine each second	As installed	1 Volt	
27	Trim surface position	Full range or each discrete position	1	As installed	0.3% of full range	
28	Landing gear position	Each discrete position*	Each gear every two seconds	As installed		* Where available, record up-and-locked and down-and-locked position
29	Novel/unique aircraft features	As required	As required	As required	As required	

**SUBPART F – COMMUNICATION AND NAVIGATION EQUIPMENT****CAR OPS 2.116 Communication equipment**

In addition to the requirements CAR OPS 2.053, an aeroplane shall be provided with radio communication equipment capable of:

- (a) conducting two-way communication for aerodrome control purposes;
- (b) receiving meteorological information at any time during flight; and
- (c) conducting two-way communication at any time during flight with at least one aeronautical station and with such other aeronautical stations and on such frequencies as may be prescribed by the appropriate authority.

*Note: These requirements are considered fulfilled if the ability to conduct the communications specified therein is established during radio propagation conditions which are normal for the route.*

**CAR OPS 2.117 Installation**

The equipment installation shall be such that the failure of any single unit required for either communications, navigation or surveillance purposes or both will not result in the failure of another unit required for communications, navigation or surveillance purposes.

**CAR OPS 2.118 Electronic Navigation Data Management**

- (a) The operator of an aeroplane shall not employ electronic navigation data products that have been processed for application in the air and on the ground unless the State of Registry has approved the operator's procedures for ensuring that the process applied and the products delivered have met acceptable standards of integrity and that the products are compatible with the intended function of the equipment that will use them. The State of Registry shall ensure that the operator continues to monitor both process and products.
- (b) The operator shall implement procedures that ensure the timely distribution and insertion of current and unaltered electronic navigation data to all aeroplanes that require it.

---

**SUBPART G – MAINTENANCE****CAR OPS 2.119 Operator's Maintenance Responsibilities**

The operator shall comply with the requirements of CAR OPS 2.059.

**CAR OPS 2.120 Maintenance Programme**

- (a) The operator shall provide, for the use and guidance of maintenance and operational personnel concerned, a maintenance programme, acceptable to the State of Registry, containing the information required by CAR M. The design and application of the operator's maintenance programme shall observe Human Factors principles according to the State of Registry's guidance material.
- (b) Copies of all amendments to the maintenance programme shall be furnished promptly to all organisations or persons to whom the maintenance programme has been issued.

**CAR OPS 2.121 Continuing Airworthiness Information**

The operator of an aeroplane of a maximum certificated take-off mass in excess of 5 700 kg shall, as prescribed by the Authority, as the State of Registry, ensure that the information resulting from maintenance and operational experience with respect to continuing airworthiness, is transmitted to the organisation responsible for type design of that aeroplane.

**CAR OPS 2.122 Maintenance Release**

The operator shall comply with the requirements of CAR OPS 2.059 & 2.062.

**SUBPART H – FLIGHT CREW****CAR OPS 2.123 Composition of the Flight Crew****(a) Designation of pilot-in-command**

For each flight the operator shall designate a pilot to act as pilot-in-command.

**(b) Flight engineer**

When a separate flight engineer's station is incorporated in the design of an aeroplane, the flight crew shall include at least one flight engineer especially assigned to that station, unless the duties associated with that station can be satisfactorily performed by another flight crew member, holding a flight engineer licence, without interference with regular duties.

**CAR OPS 2.124 Flight Crew Member Emergency Duties**

The operator shall, for each type of aeroplane, assign to all flight crew members the necessary functions they are to perform in an emergency or in a situation requiring emergency evacuation. Recurrent training in accomplishing these functions shall be contained in the operator's training programme and shall include instruction in the use of all emergency and life-saving equipment required to be carried, and drills in the emergency evacuation of the aeroplane.

**CAR OPS 2.125 Flight Crew Member Training Programmes**

- (a) The operator shall establish and maintain a training programme that is designed to ensure that a person who receives training acquires and maintains the competency to perform assigned duties, including skills related to human performance.
- (b) Ground and flight training programmes shall be established, either through internal programmes or through a training services provider, and shall include or make reference to a syllabus for those training programmes in the company operations manual.
- (c) The overall objective of all type of training is the acquisition of all the skill, knowledge, standardization and attitude requirements to competently perform all the job-related assigned duties in a safe, efficient, and effective manner under all possible circumstances.
- (d) The operator shall specify all kind of ground schooling, line and simulator training syllabus in the Operations Manual for the flight crew. No training to be undertaken unless, it has been approved by the Authority.

- (e) No amendments to any training programme will be made until after approval for such amendments has received CAA approval.

The training programme shall include training to competency for all equipment installed.

*Note: Flight simulators should be used to the maximum extent practicable for initial and annual recurrent training.*

#### **CAR OPS 2.126 Qualifications**

- (a) Flight crew member licensing The operator shall:

- (1) ensure that each flight crew member assigned to duty holds a valid licence issued by the State of Registry, or if issued by another Contracting State, rendered valid by the State of Registry;
- (2) ensure that flight crew members are properly rated; and
- (3) be satisfied that flight crew members are competent to carry out assigned duties.

- (b) Training

The operator of an aeroplane equipped with an airborne collision avoidance system (ACAS II) shall ensure that each flight crew member has been appropriately trained to competency in the use of ACAS II equipment and the avoidance of collisions.

- (c) Recent experience

- (1) Pilot-in-Command

The operator shall not assign a pilot to act as pilot-in-command of an aeroplane unless that pilot has made at least three take-offs and landings within the preceding 90 days on the same type of aeroplane or in a flight simulator approved for the purpose.

- (2) Co-pilot

The operator shall not assign a co-pilot to operate at the flight controls of an aeroplane during take-off and landing unless that pilot has made at least three take-offs and landings within the preceding 90 days on the same type of aeroplane or in a flight simulator approved for the purpose.

- (d) Pilot proficiency checks

The operator shall ensure that piloting technique and the ability to execute emergency procedures is checked periodically in such a way as to demonstrate the pilot's competence. Where the operation may be conducted under the instrument flight rules, the operator shall ensure that the pilot's competence to comply with such rules is demonstrated to either a check pilot of the operator or a representative of the Authority.

**CAR OPS 2.126A Flight Operations Officer/Flight Dispatcher**

The operator should ensure that any person assigned as a flight operations officer/flight dispatcher is trained and maintains familiarization with all features of the operation which are pertinent to their duties, including knowledge and skills related to Human Factors.

*Note: The qualification requirements for Flight Dispatchers is stipulated in CAR OPS 1.*

**SUBPART I – MANUALS, LOGS AND RECORDS****CAR OPS 2.127 Maintenance Programme**

- (a) A maintenance programme for each aeroplane shall contain the following information:
- (1) maintenance tasks and the intervals at which these are to be performed, considering the anticipated utilization of the aeroplane;
  - (2) when applicable, a continuing structural integrity programme;
  - (3) procedures for changing or deviating from (a) and (b) above as approved by the State of Registry; and
  - (4) when applicable and approved by the State of Registry, condition monitoring and reliability programme descriptions for aeroplane systems, components and engines.
- (b) Maintenance tasks and intervals that have been specified as mandatory in approval of the type design, or approved changes to the maintenance programme, shall be identified as such.
- Note: The maintenance programme should be based on maintenance programme information made available by the State of Design or by the organisation responsible for the type design, and any additional applicable experience.*
- (c) The design and application of the operator's maintenance programme shall observe Human Factors principles according to the State of Registry's guidance material.

**CAR OPS 2.128 Technical log**

A Technical log for the aeroplane shall be provided in accordance with the requirements of CAR M.

**CAR OPS 2.128A Flight recorder records**

The owner of the aeroplane, or in the case where it is leased, the lessee, shall ensure, to the extent possible, in the event the aeroplane becomes involved in an accident or incident, the preservation of all related flight recorder records and, if necessary, the associated flight recorders, and their retention in safe custody pending their disposition as determined in accordance with CAR 13.

**SUBPART J - SECURITY****CAR OPS 2.129 Security programme**

*Note: General Aviation operators, operating under CAR OPS 2, Part II, should establish, implement and maintain a written operator security programme that meets the requirements of the National Civil Aviation Security Programme of The Sultanate of Oman. This security programme may be incorporated in the Operations Manual.*

**CAR OPS 2.130 Flight Crew Compartment Security**

In an aeroplane which is equipped with a flight crew compartment door, this door shall be capable of being locked, and means shall be provided by which the cabin crew can notify the flight crew in the event of suspicious activity or security breaches in the cabin.



**SUBPART K – CABIN CREW****CAR OPS 2.131 Assignment of Emergency Duties**

The requirement for cabin crew for each type of aeroplane shall be determined by the operator, based on seating capacity or the number of passengers carried, in order to affect a safe and expeditious evacuation of the aeroplane, and the necessary functions to be performed in an emergency or a situation requiring emergency evacuation. The operator shall assign these functions for each type of aeroplane.

**CAR OPS 2.132 Cabin Crew at Emergency Evacuation Stations**

When cabin crew are utilised by the operator, each cabin crew member assigned to emergency evacuation duties shall occupy a seat provided during take-off and landing and whenever the pilot-in-command so directs.

**CAR OPS 2.133 Protection of Cabin Crew During Flight**

Each cabin crew member shall be seated with seat belt or, when provided, safety harness fastened during take-off and landing and whenever the pilot-in-command so directs.

**CAR OPS 2.134 Training**

The operator shall ensure that a training programme is completed by all persons before being assigned as a cabin crew member.

*Note: The operator should establish and maintain a cabin crew training programme that is designed to ensure that persons who receive training acquire the competency to perform their assigned duties and includes or makes reference to a syllabus for the training programme in the company operations manual. The training programme should include Human Factors training.*

Note: — Guidance material on the application of Human Factors principles can be found in the Cabin Crew Safety Training Manual (Doc 10002).

**ATTACHMENT 1. A MINIMUM EQUIPMENT LIST (MEL)**

1. If deviations from the requirements of Authority in the certification of aircraft were not permitted, an aircraft could not be flown unless all systems and equipment were operable. Experience has proved that some unserviceability can be accepted in the short term when the remaining operative systems and equipment provide for continued safe operations.
2. The State should indicate through approval of a minimum equipment list those systems and items of equipment that may be inoperative for certain flight conditions with the intent that no flight can be conducted with inoperative systems and equipment other than those specified.
3. A minimum equipment list, approved by the Authority, is therefore necessary for each aircraft, based on the master minimum equipment list established for the aircraft type by the organization responsible for the type design in conjunction with the State of Design.
4. The State of the Operator should require the operator to prepare a minimum equipment list designed to allow the operation of an aircraft with certain systems or equipment inoperative provided an acceptable level of safety is maintained.
5. The minimum equipment list is not intended to provide for operation of the aircraft for an indefinite period with inoperative systems or equipment. The basic purpose of the minimum equipment list is to permit the safe operation of an aircraft with inoperative systems or equipment within the framework of a controlled and sound programme of repairs and parts replacement.
6. Operators are to ensure that no flight is commenced with multiple minimum equipment list items inoperative without determining that any interrelationship between inoperative systems or components will not result in an unacceptable degradation in the level of safety and/or undue increase in the flight crew workload.
7. The exposure to additional failures during continued operation with inoperative systems or deficiencies in accordance with a minimum equipment

*Note: The Operator shall comply with the requirements stipulated in CAR MEL.*